

Description: The IS-PA2 is an adaptor with a 5-position SIP connector on one side and a 5-position, spring-loaded connector on the other side.


Use: To connect Microchip's PICkit 3 programmer to an unpopulated 5-position SIP footprint on a PCB. Position 1 of the PICkit3 must be at position 1 on the PCB or damage could occur.

Part Number: IS-PA2.

Connector callout.

J1	J2
1	1
2	2
3	3
4	4
5	5

IS-PA2 on a board:

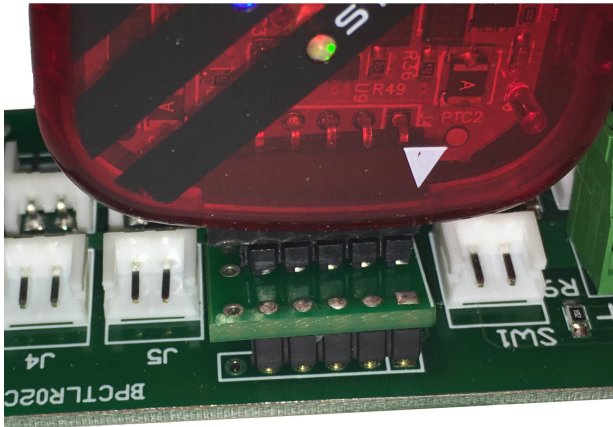

Board photos:

