


LCD 64x32 Logic Boards User Manual

Revision G

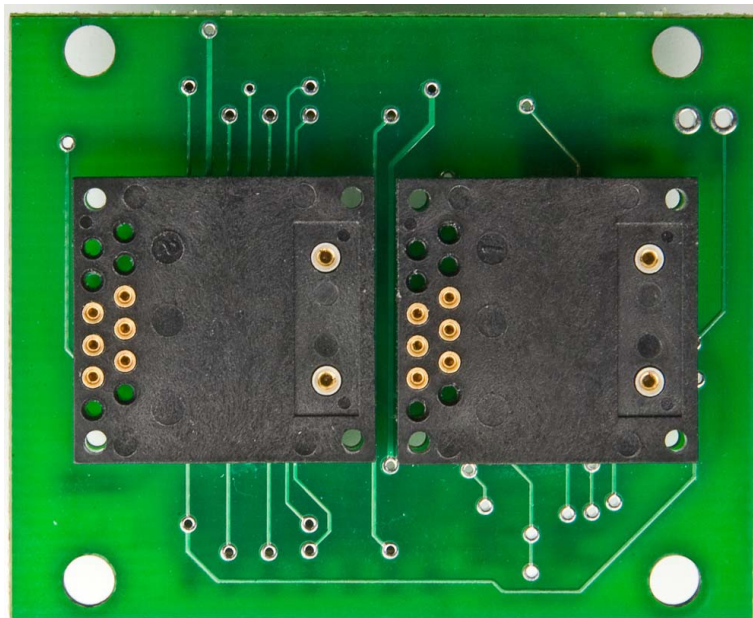

All Rights Reserved Worldwide

NKK Switches makes no warranty for the use of these products and assumes no responsibility for any errors, which may appear in this document, nor does it make a commitment to update the information contained herein.
SmartDisplay is trademark of NKK Switches.

TABLE OF CONTENTS

Contents

1. What are Logic Boards?.....	3
2. Standard Part Numbers	4
5. Board Dimensions.....	9
6. Schematics.....	14
7. Key Terms & Definitions.....	19
Warranty.....	20

1. What are Logic Boards?

Logic Boards are switch panel that have glue logic to convert addressing and switch scanning to serial. A Logic Board can be designed for any number of switches. The Logic Boards can be daisy-chained using 14 pin ribbon cable hence allowing variable number of switches to be controlled via one port from a controller.

Logic Board with any number of switches can be designed. Daisy-chain capability of the Logic Boards allow the switches to be mounted at desire locations on the control panel.

The switches/displays can be soldered directly to the Logic Board or mounted on a sockets.

2. Standard Part Numbers

The Logic Boards listed below are production parts. There are prototype boards that are not listed. Additionally, NKK Switches will work with customers to design and build custom logic boards.


Item	Part# with Socket and switch	Part# with switch	Description
1	IS-L02A1-CS	IS-L02A1-S	Logic Board, LCD 64x32 RGB, IS15EBFP4RGB, 2SW. Side by side stackable
2	IS-L02G1-CS	IS-L02G1-S	LOGIC BOARD, 1x2, LCD 64x32 RGB, IS15EBFP4RGB-09YN, 2SW. Side by side stackable
3	IS-L02H2-CS	IS-L02H2-S	LOGIC BOARD, 1x2, LCD 64x32 RGB, IS15ESBFP4RGB, 2SW. Side by side stackable
4	IS-L04G2-CS	IS-L04G2-S	LOGIC BOARD, 2x2, LCD 64x32 RGB, IS15EBFP4RGB-09YN, 4SW. Side by side stackable
5	IS-L16G2-CS	IS-L16G2-S	LOGIC BOARD, 4x4, LCD 64x32 RGB, IS15EBFP4RGB-09YN, 16SW. Side by side stackable

There is a signal booster for when too many Logic Board are used in a daisy chain or very long cable are used for interconnect.

Item	Part#	Description
1	IS-LBUF01	Signal booster for both LCD36x24 and LCD64x32

3. Connectors

The SmartDisplay Controller connects to the J1 of the first logic board via 14 pin ribbon cables. The J2 of the first logic board connect to J1 of the second logic board and so on. The switch numbering start with switch one of the first Logic Board. The first switch of the next Logic Board will be one higher than the last switch of the previous Logic Board.

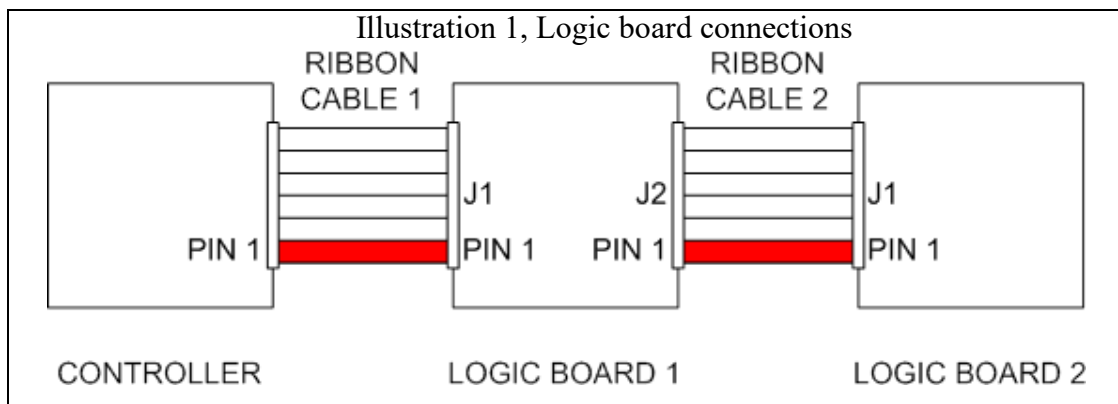

Note: Attaching the ribbon cable without the red line on pin 1 on each of the headers may cause damage to the controller or the logic board.

Ribbon Cables

These cables are used for connecting Logic Boards and the controller

Item	Part#	Length	Description
1	ISDCB81.2	1.2"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"
2	ISDCB83	3"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"
3	ISDCB88	8"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"
4	ISDCB812	12"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"
5	ISDCB824	24"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"
6	ISDCB836	36"	RIBBON CABLE, 14 CONDUCTORS, 28AWG, .050"

The logic boards have two connectors:

J1 Input port: 7x2 male header .1"x.1" spacing.

This connector connects to the controller port or J2 of the previous logic board in the daisy chain.

Pin	Function	
1	Din	Connected to Din of first shift register
2	GND	Ground
3	CLK	Clock for all shift registers
4	GND	Ground
5	NC	
6	Vsup	7V to 12V
7	LP	Latch all shift register outputs to the all drivers
8	NC	
9	SCK	Clock of all SmartDisplays
10	NC	
11	SDI	Data of the all SmartDisplay
12	Vsup	7V to 12V
13	NC	
14	SWRD	Switch Read bus for all SmartDisplays

J2 Output port: 7x2 male header .1"x.1" spacing.

This connector connects to J1 of the next logic board in the daisy chain.

Pin	Function	
1	Dout	Connected to Dout of the last shift register
2	GND	
3	CLK	Connected to CLK of J1
4	GND	
5	GND	
6	Vsup	7V to 12V
7	LP	Connected to LP of J1
8	NC	
9	SCK	Connected to SCK of J1
10	GND	
11	SDI	Connected to SDI of J1
12	Vsup	7V to 12V
13	GND	
14	SWRD	Connected to SWRD of J1

4. How to control the Logic Board mounted LCD64x32 switches

If you are using NKK controllers, you can skip this section. This section cover detail on how to control LCD 64x32s mounted on the Logic Boards.

Please note the controller with the same port can control the LCD36x24. If you want the same design have capability to control both type of the LCDs Please check the LCD36x24 Logic Board user manual as some of indicated ground in below table need to be changed to LCD36x24 Logic Boards requirement.

Pin	J1 of the first Logic Board	Controller connection
1	Din	Microcontroller pin (output)
2	GND	GND
3	CLK	Microcontroller pin (output)
4	GND	GND
5	NC	GND
6	Vsup	7V to 12V. Closer to 7V is better
7	LP	Microcontroller pin (output)
8	NC	GND
9	SCK	Microcontroller pin (output)
10	NC	GND
11	SDI	Microcontroller pin (output)
12	Vsup	7V to 12V. Closer to 7V is better
13	NC	GND
14	SWRD	Microcontroller pin (input) and 2K pull down to GND

Clock and data can be connected to SPI/UART mode 0 or any pin of microcontroller. For SCK and SDI signal please refer to the application note for LCD64x32 switches.

Switch Numbering

On each Logic Board the first switch is in the upper left-hand corner. Row by row with the last switch in the lower right-hand corner. The switch numbering start with switch one of the first Logic Board. The first switch of the next Logic Board will be one higher than the last switch of the previous Logic Board.

Selecting a Switch

The SS (Slave Select) of each switch is connected to output of the latch driver. The input of the Latch driver is connected to serial to parallel shift register. One bit is shifted for each switch using Din and CLK. The last bit shifted will be for switch #1.

To select a switch for communication, bits should be shifted using Din and CLK so all the switches have a high bit except the communication target switch then by toggling the LP that switch get selected. The communication to the switch is done via SCK and SDI. After communication is ended to the switch, all high bits are shifted via Din and CLK for all the switches and LP toggled so no switch is selected.

Switch Scan

One terminal of each switch is connected to the SWRD (switch Read). The output of the serial to parallel shift register is connected to another switch terminal via a diode. One bit is shifted for each switch using Din and CLK. The last bit shifted will be for switch #1.



Switch Scan is accomplished by sending low bits via Din and CLK for all the switches except the switch being scanned. Then the SWRD is checked. If the SWRD is low, the switch is not pressed. If the SWRD is high, the switch is pressed.

The switch scans should be more than 10ms apart to prevent de-bouncing read and less than 80ms to prevent missing a read.


5. Board Dimensions

All dimensions are in inches. Logic Board Dimensions for L02A1 and L02G1:


	Dimension A
Socket	0.154
Compact	0.906
Both	1.059

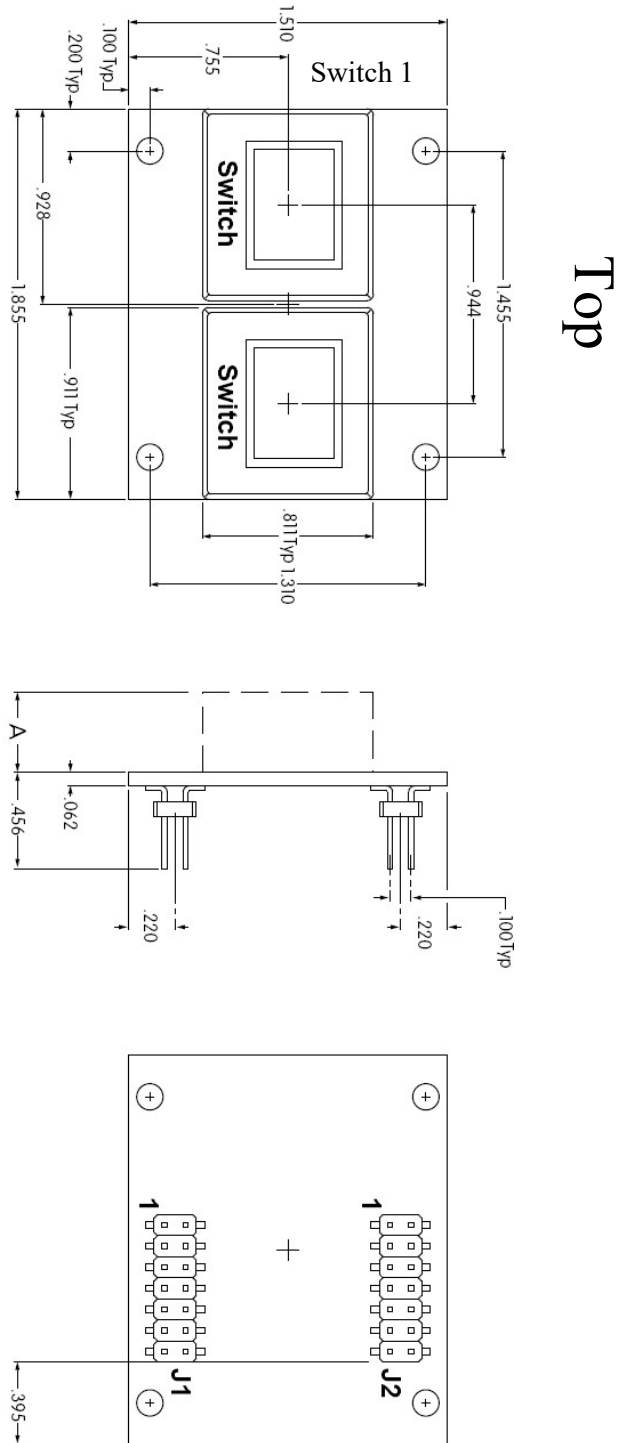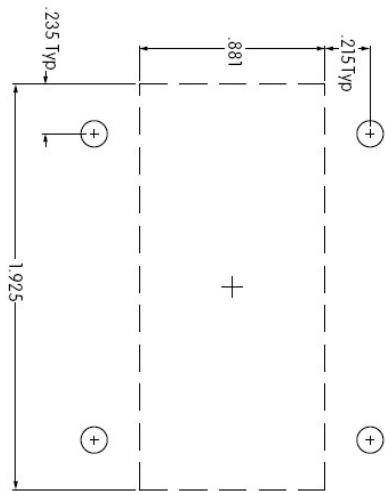


Logic Board Dimensions for L02H2:

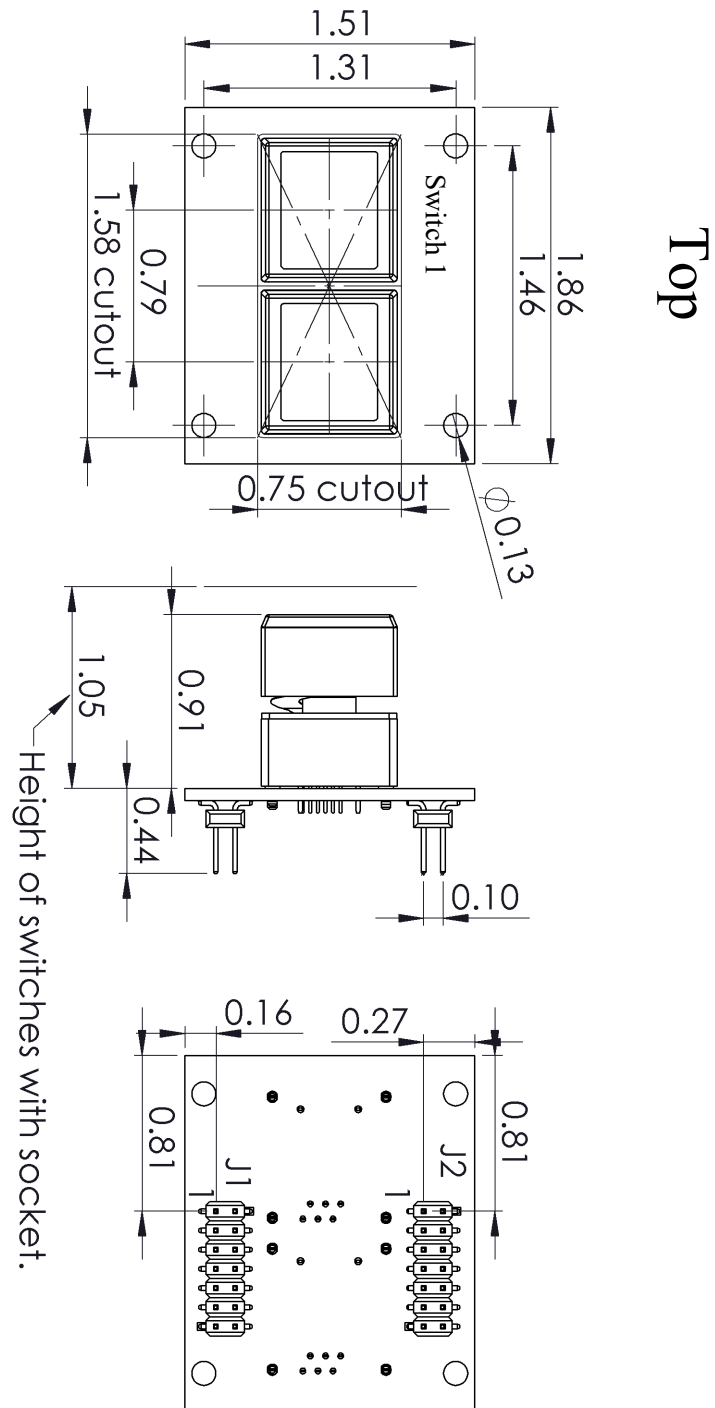


Logic Board Dimensions for L04G2:

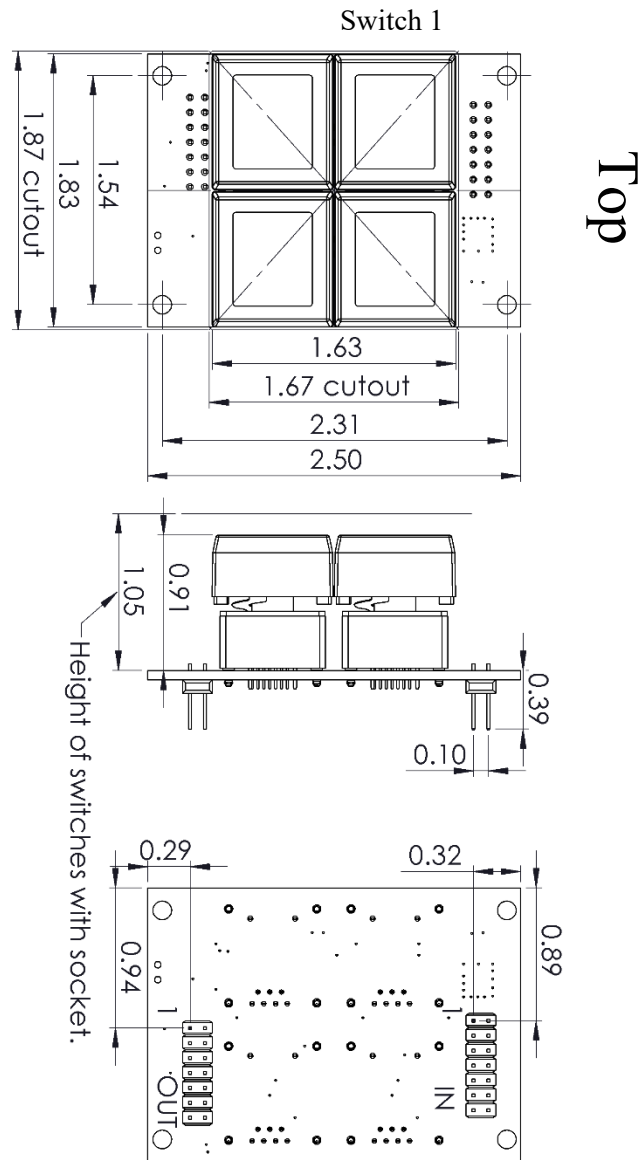

Logic Board Dimensions for L16G2:

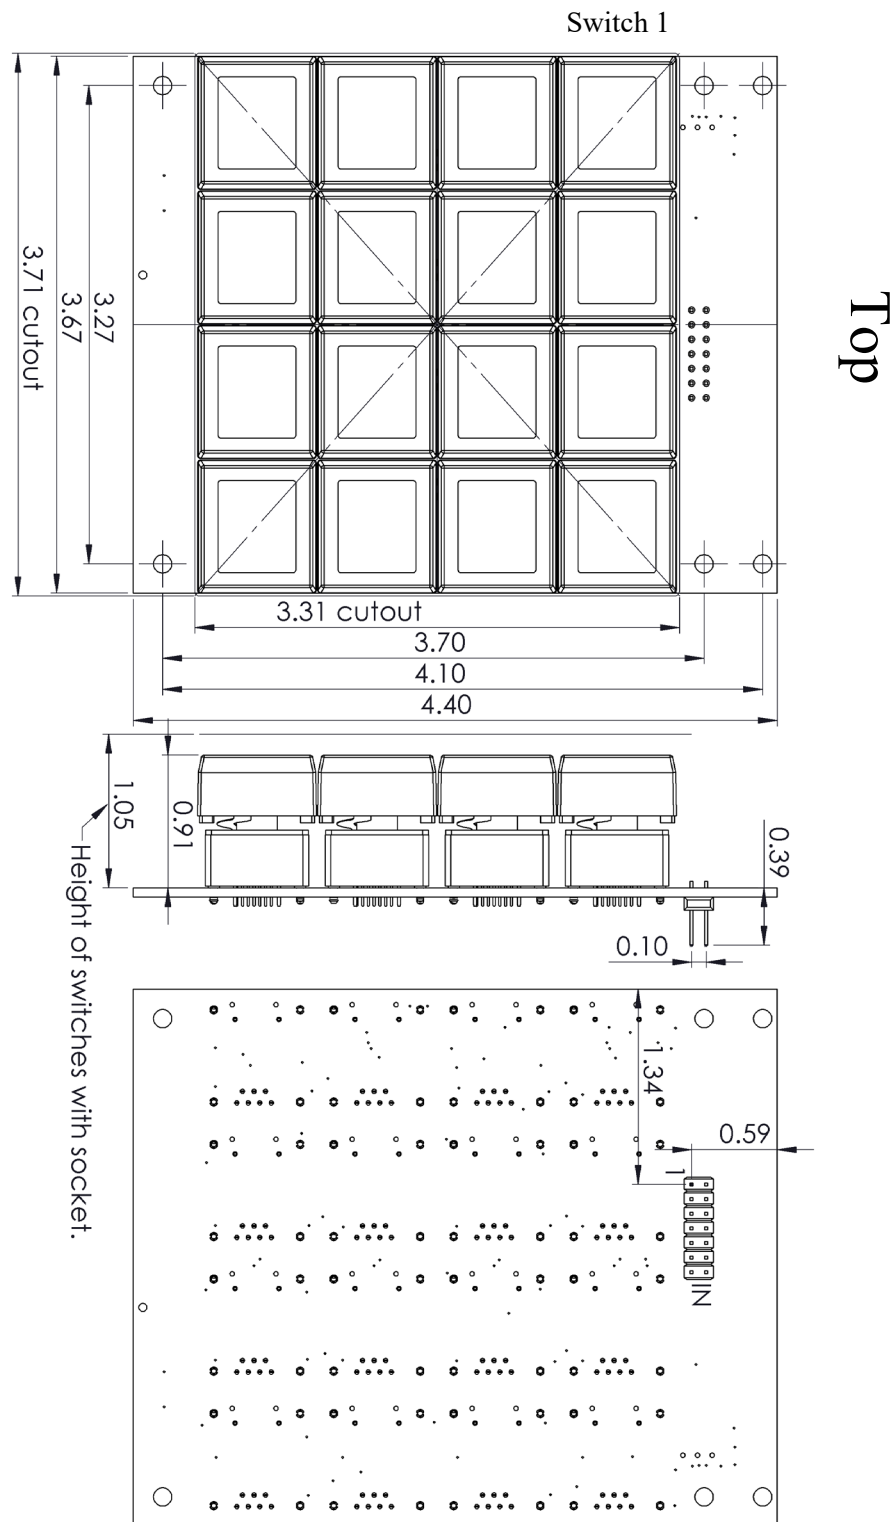


Logic Board Dimensions for LBUF01:

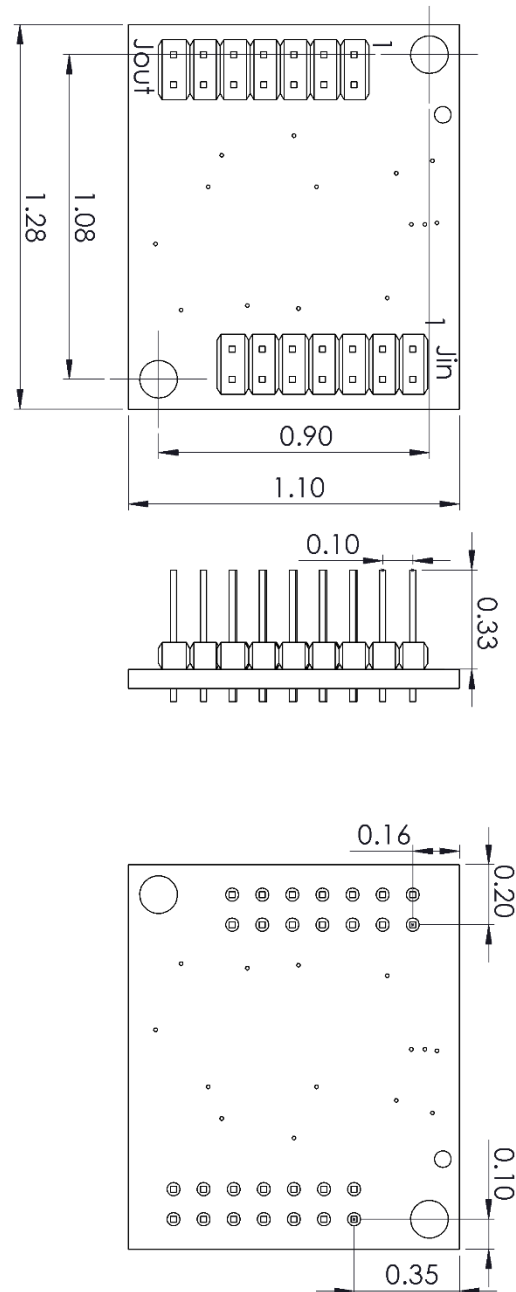


6. Schematics


Schematic for IS-L02G1 Rev C:

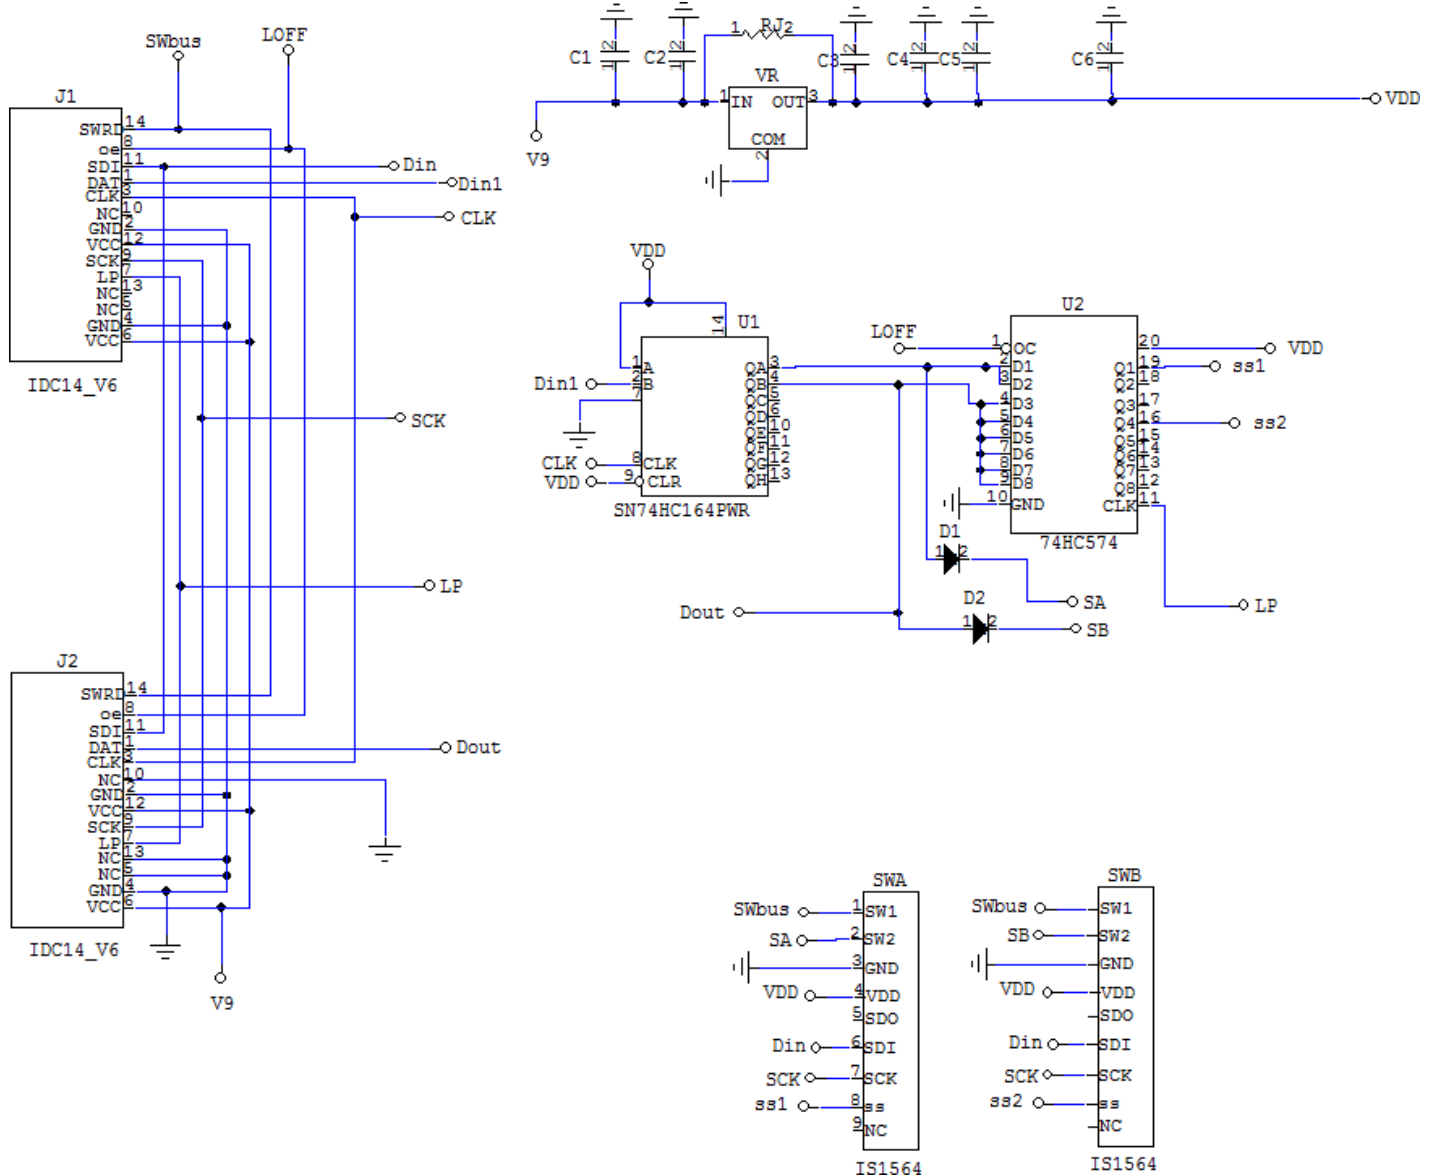





Schematic for IS-L02A1 Rev D:


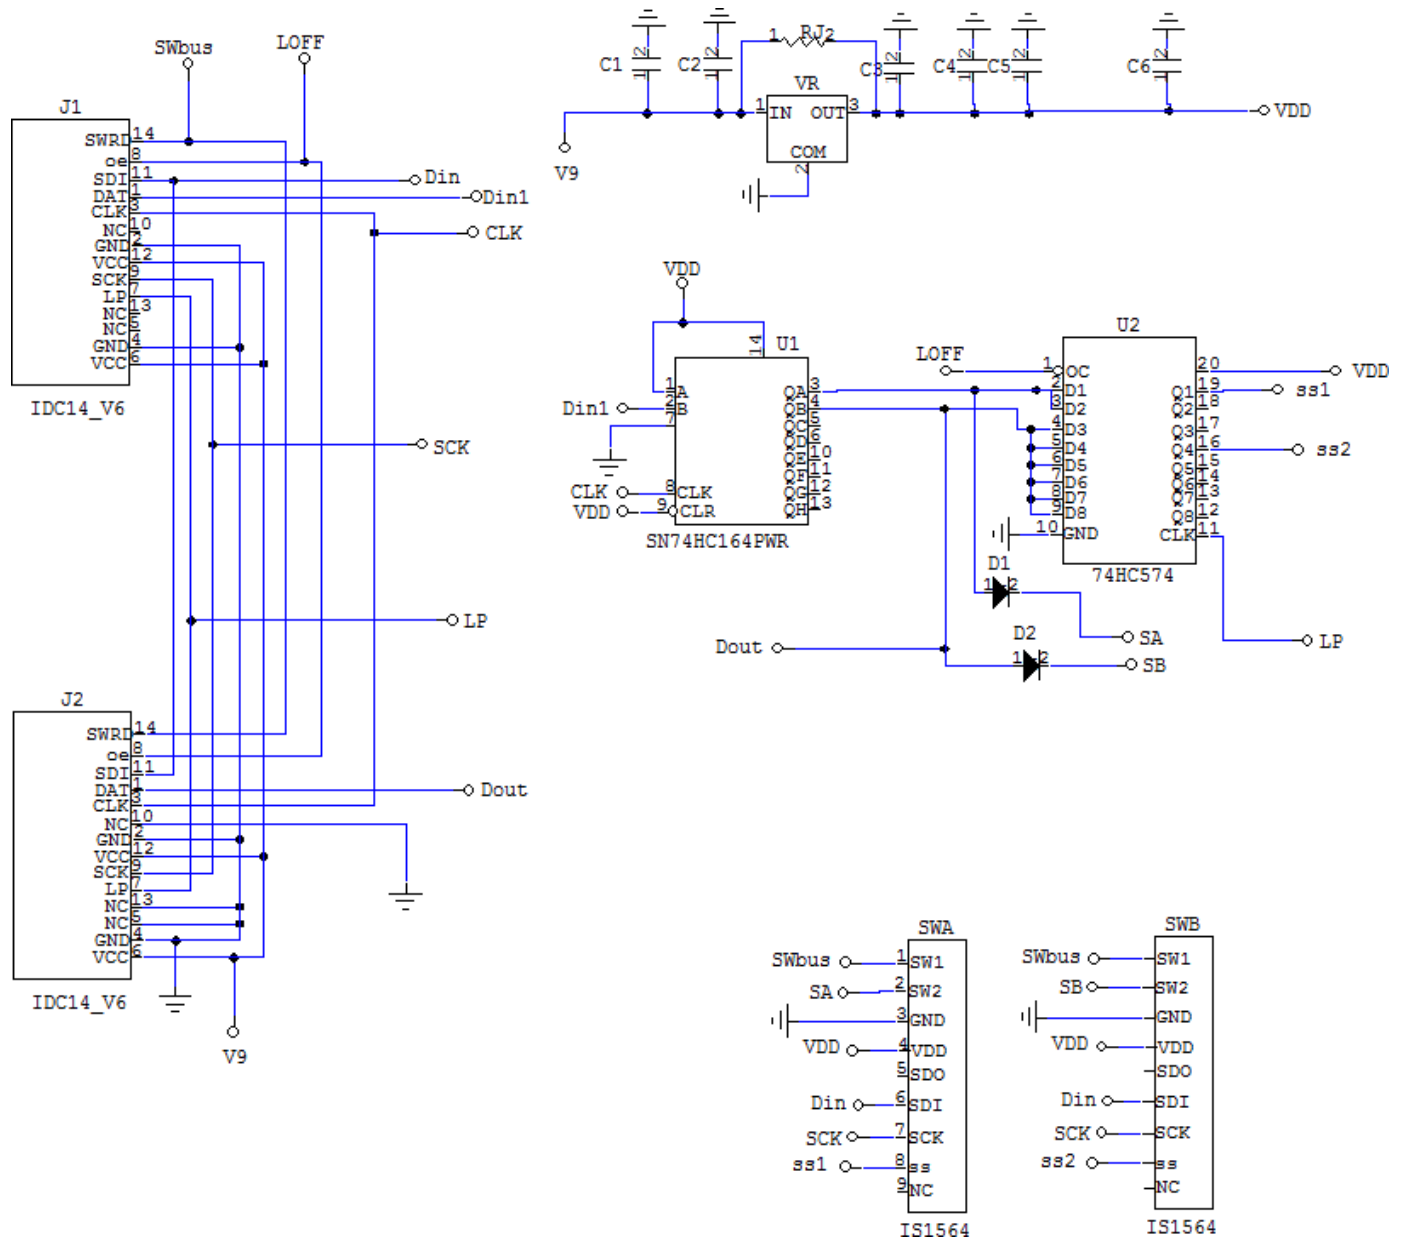


Schematic for IS-L02H2 Rev D:





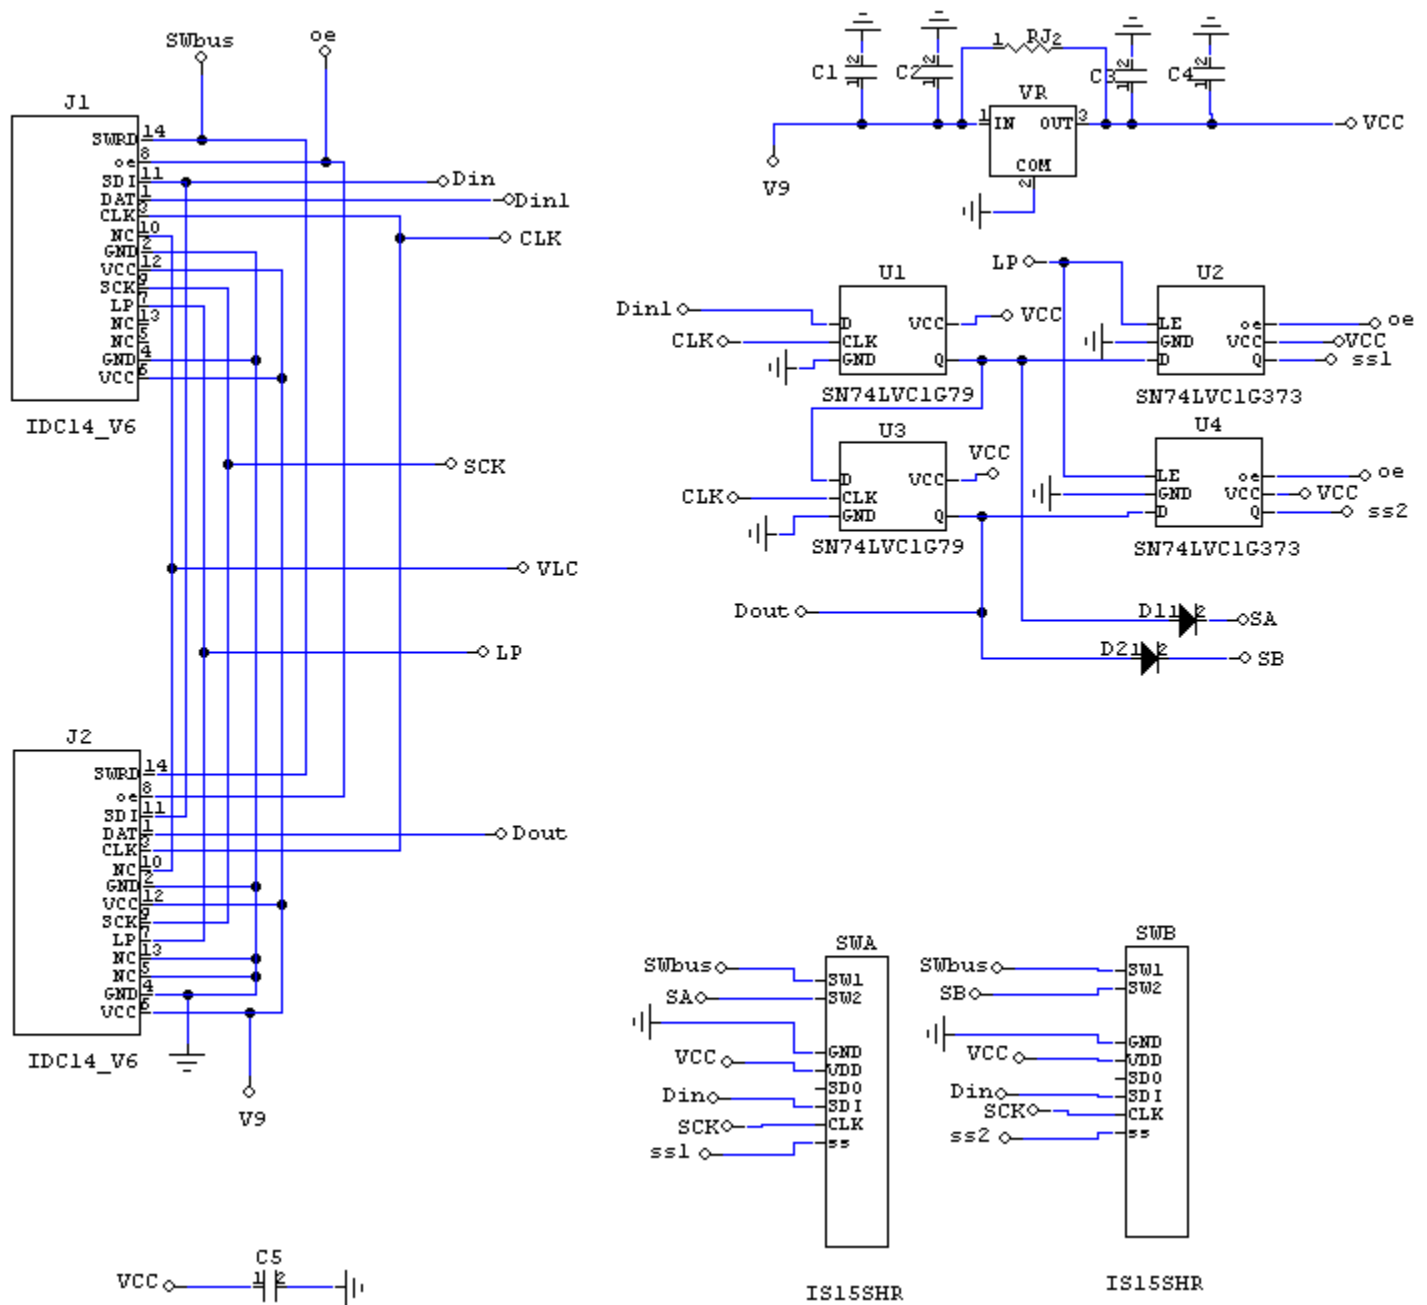




Schematic for IS-L04G1 Rev A:

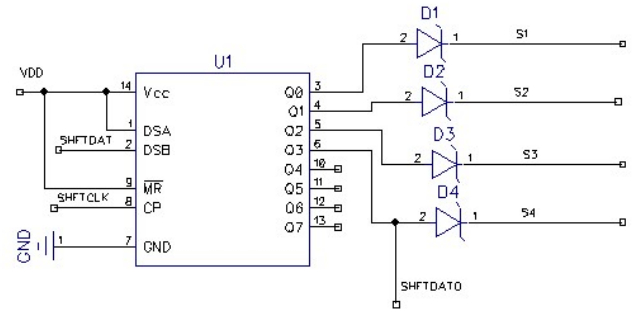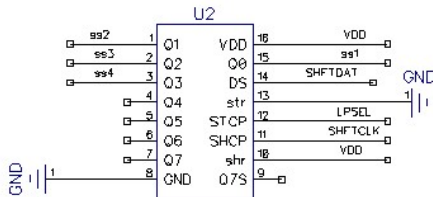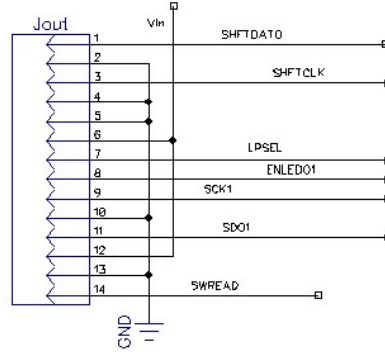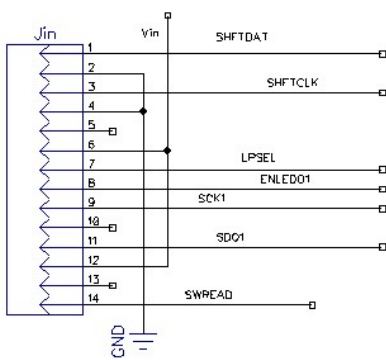


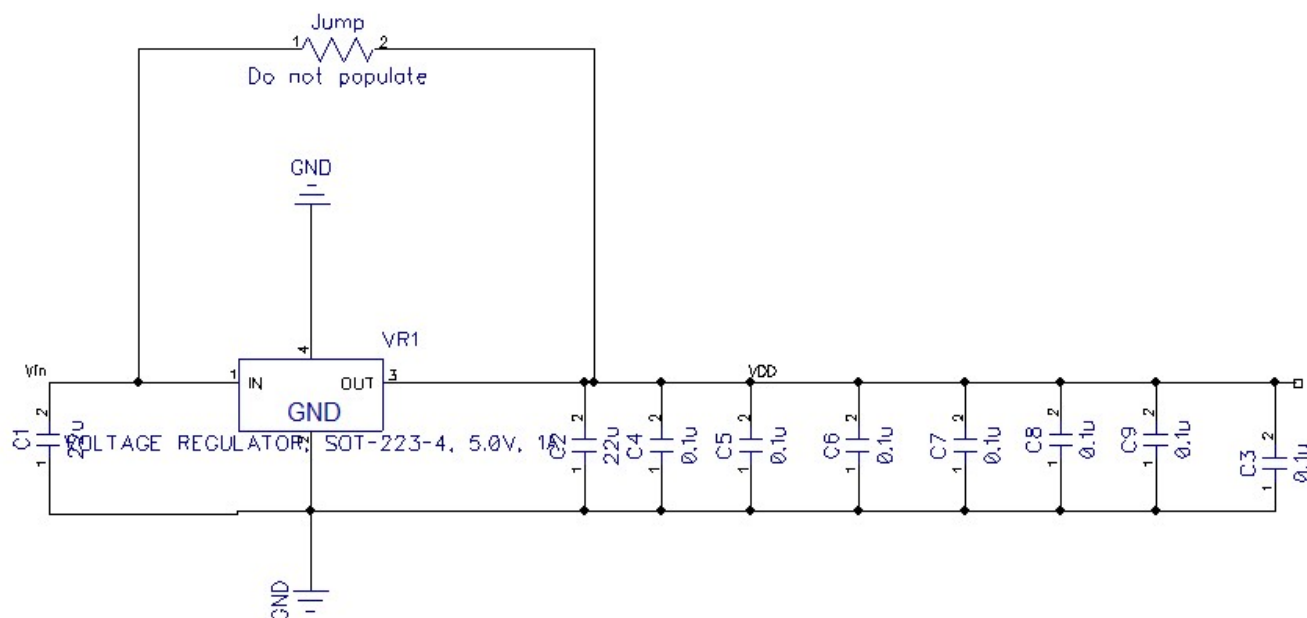



Schematic for IS-L04G2 Rev A:

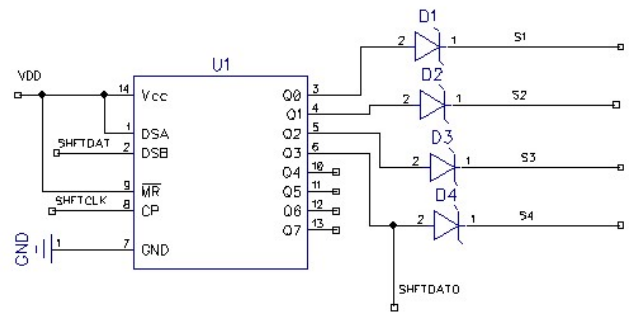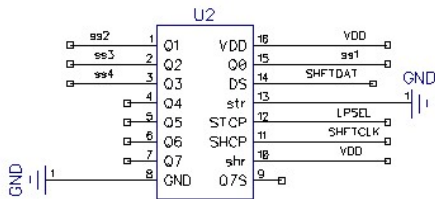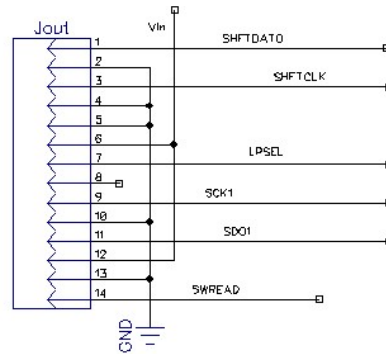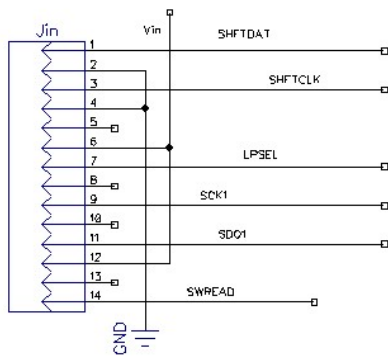

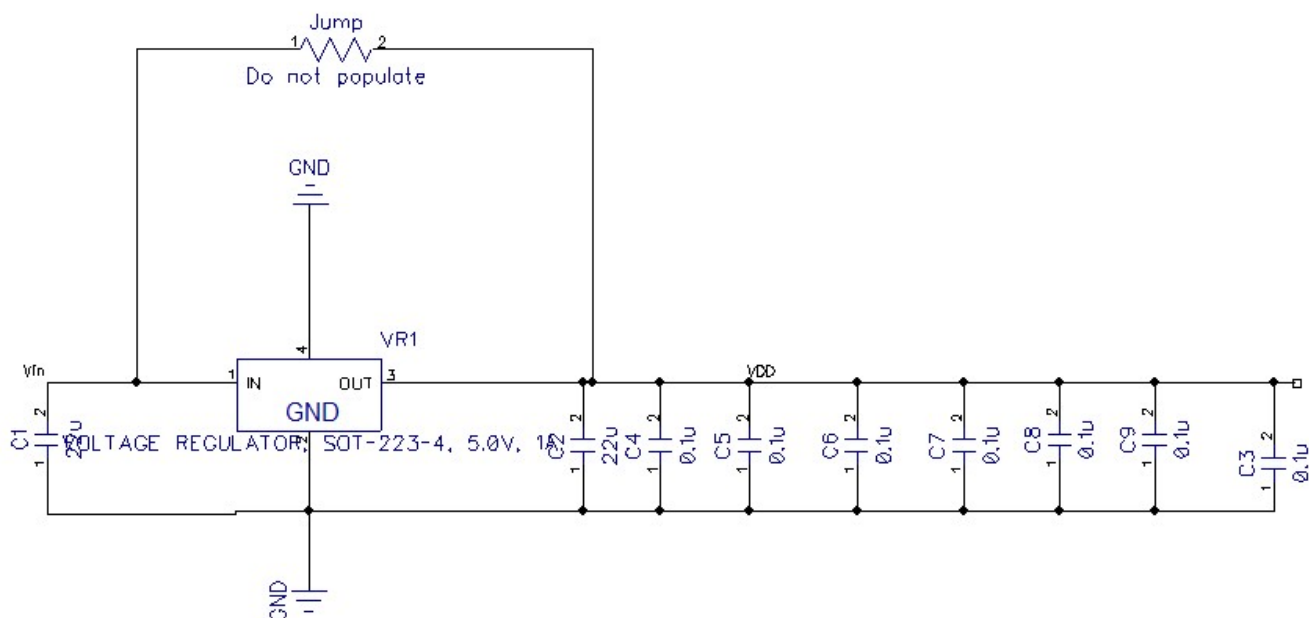


Schematic for IS-L16G2 Rev A:

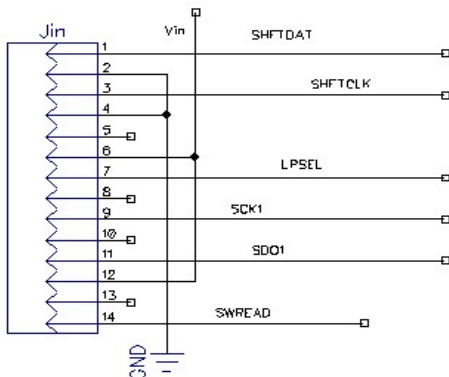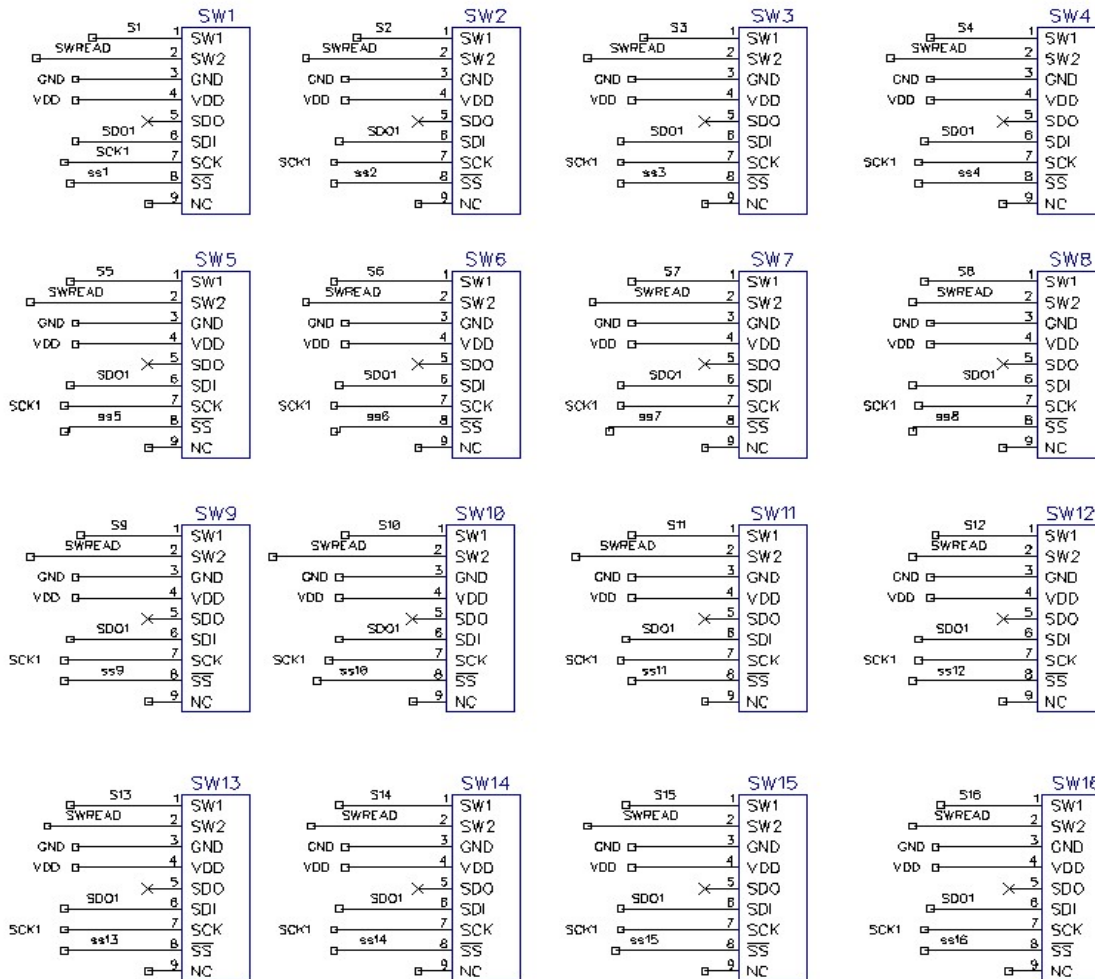

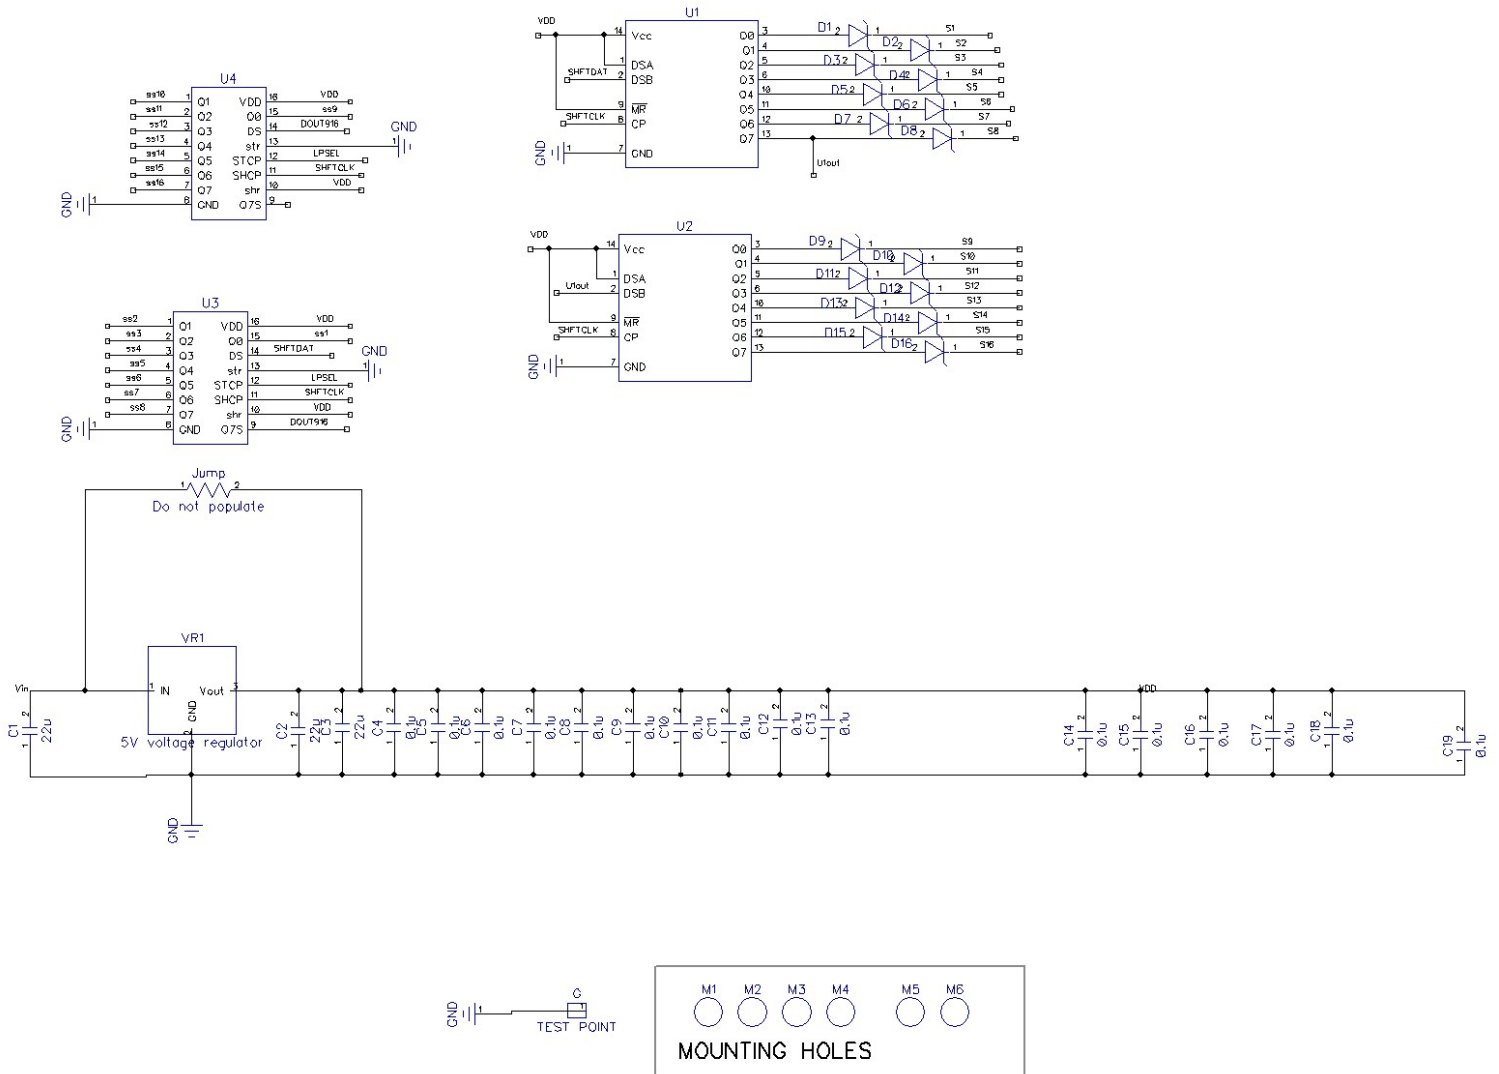

Schematic for IS-LBUF01 Rev B:

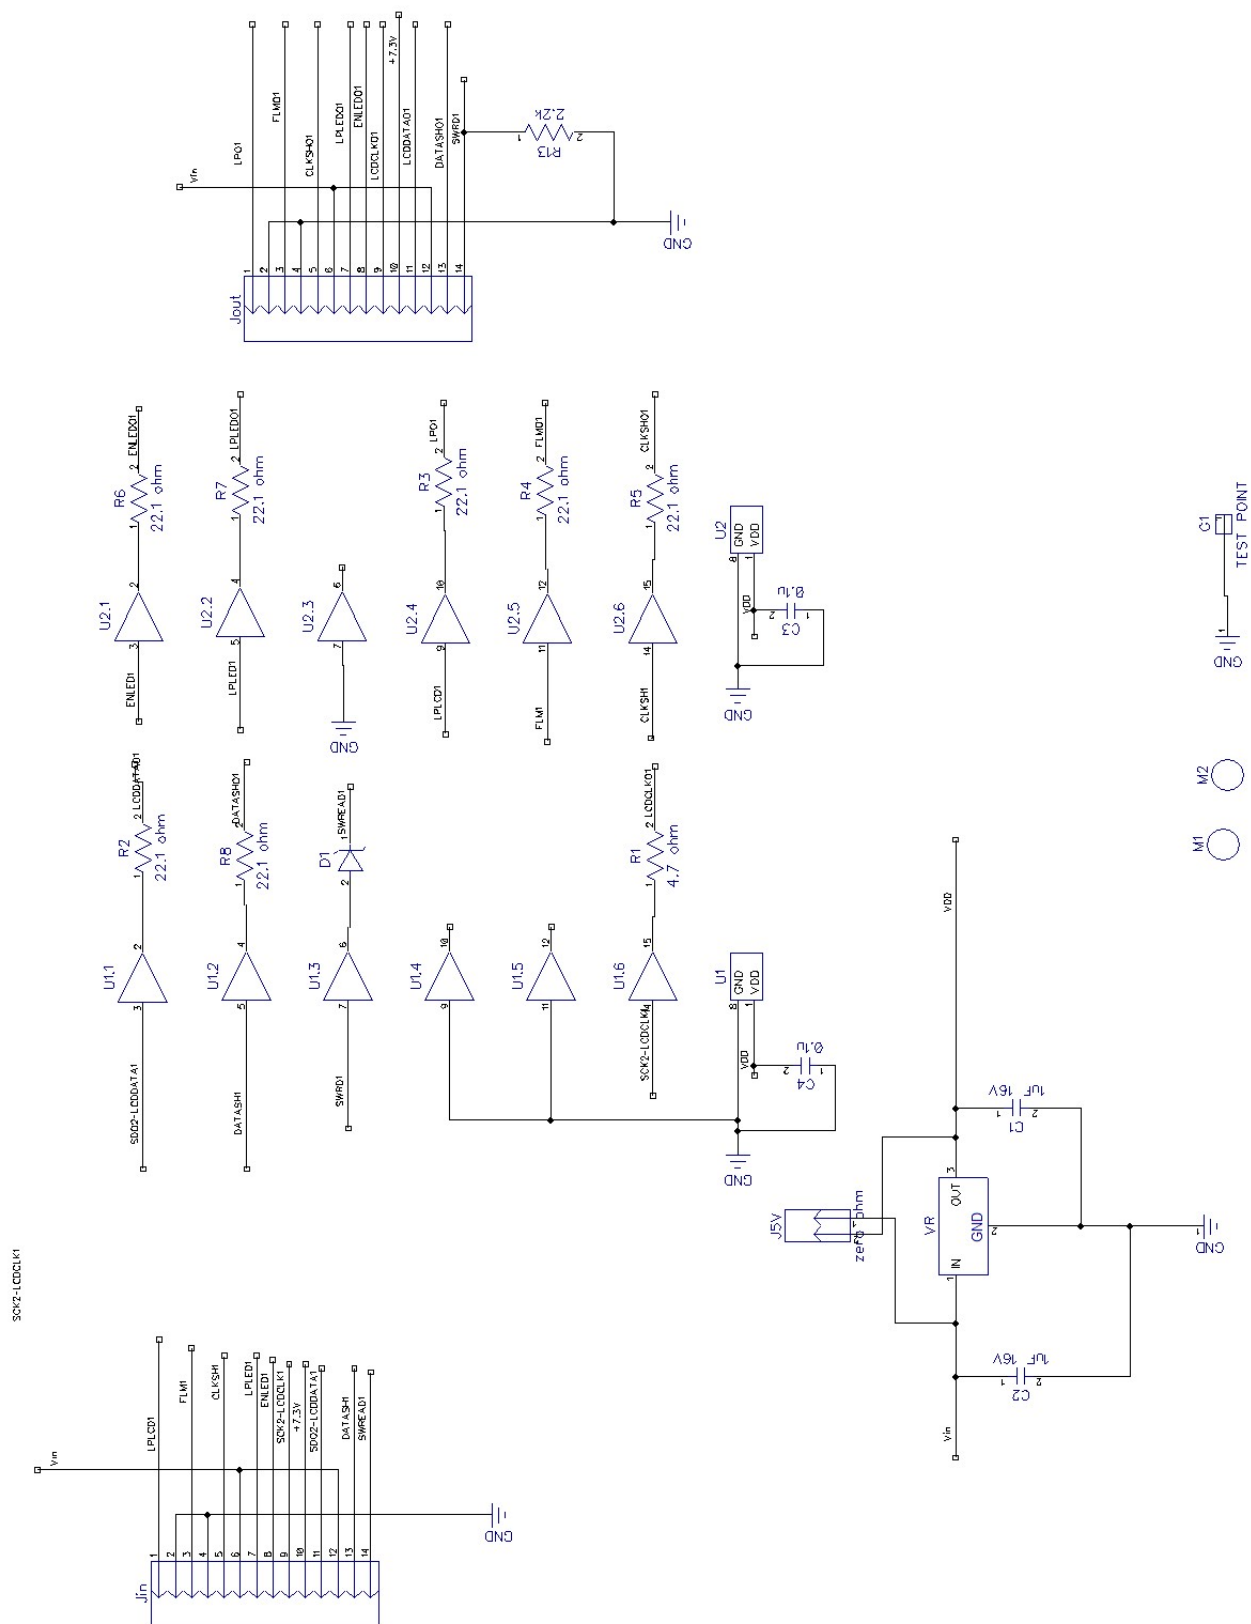

7. Key Terms & Definitions

Module Host	NKK Switches' LCD SmartDisplays.
Controller Logic Board Byte	Any computer, terminal, or other device that can communicate over the USB line.
Nibble/Hex digit ASCII	A PCB assembly that controls one or more logic boards and the switches associated with them. It communicates with a host over the USB line.
Communication Format	<p>A PCB assembly with “glue logic” for mounting switches. It is controlled by a controller.</p> <p>An eight-bit hex value ranging from 00H to FFH (Decimal 0 to 255). The bit format of a byte is: (B7 B6 B5 B4 B3 B2 B1 B0) where B7 is most significant and bit B0 is least significant bit.</p> <p>A four-bit value ranging from 0H to FH. A byte consists of two nibbles. A byte value representing a symbol.</p> <p>There are two formats to transmit a byte:</p> <p>Hex format - A hex byte is transmitted without any change to it. [xxH] will be used to denote this.</p> <p>All commands and some data are sent by using this format.</p> <p>ASCII HEX format - Each nibble of the byte is converted to ASCII code and sent as a byte. [xxAH] will be used to denote this.</p> <p>For example, the hex byte 5AH is transmitted in two bytes, 35H and 41H. The ASCII value for 5 is 35H and the ASCII value for A is 41H.</p> <p>All addresses and most data are sent using this format.</p>
Address	A one byte value ranging from 01H to FFH representing the 255 memory.

Warranty

NKK SWITCHES LIMITED WARRANTY AND LIMITATION OF LIABILITY

The following limits our liability. Please read.

NKK Switches hereby warrants this product against any and all manufacturing defects for a period of one year from the date of sale of this product to the original end user. NKK Switches' liability in the event of such defect is limited to repair or replacement of the defective products. NKK Switches disclaims any liability or warranty obligation with respect to any product that is misused, damaged by any user, or not used in conformity with all applicable product specifications.

NKK SWITCHES HEREBY DISCLAIMS ANY WARRANTY, EXPRESS OR IMPLIED, OTHER THAN THAT CONTAINED HEREIN. NKK SWITCHES EXPRESSLY DISCLAIMS THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, AND SHALL HAVE NO LIABILITY BASED ON OR ARISING FROM ANY CLAIM OF SUCH WARRANTY.

NKK Switches shall have no liability to any person for any incidental, consequential, special, punitive, or other damages of any kind whatsoever relating to any use of this product.

USE OF THIS PRODUCT IN CONNECTION WITH ANY LIFE CRITICAL APPLICATION IS NOT RECOMMENDED.