



FP01 Series.....D4

Photo Interrupter
3 Million Actuations
6-pin Connector
Snap-in Mount



GB SeriesD8

Ultra-miniature Fully Illuminated Plunger
0.4VA Logic Level
Process Sealed; Straight, Right Angle & Vertical PC



HB Series Illum & Nonillum.....D12

0.1A Power Level; Full Face & Spot Illumination
Solder Lug
Rear Panel Threaded Mounting



HB2 SeriesD18

Audio/Video Quiet Actuation; 0.4VA Logic Level
Bicolor LED
PCB Mounting



KB Series Illum & NonillumD22

1A Power Level & 0.4VA Logic Level
Full Face & Spot Illumination
Solder Lug; Bushing & Snap-in Mount



KP SeriesD36

Audio/Video with Silent & Audible Options
100mA Low Level
Bicolor & RGB LEDs; Alternating Legends
Rectangular Cap Assembly & Home Keys
PCB Mounting



LB Series Illum & NonillumD48

Snap-in Mount
3A Power Level & 0.4VA Logic Level
Full Face & Spot Illumination; Super Bright & Bright LEDs
Solder Lug/Quick Connect



LB Series Illum & NonillumD59

Panel Seal
3A Power Level & 0.4VA Logic Level
Full Face & Spot Illumination; Super Bright & Bright LEDs
Solder Lug/Quick Connect



LP01 SeriesD68

Secured Cap Design; 3A Power Level
Full Face Illumination or Spot Illumination
Solder Lug/Quick Connect



NP01 Series Illum & Nonillum....D74

Soft Touch, Smooth Actuation
0.4VA Logic Level
Bicolor Alternating Legends
PCB Mounting



UB Series Illum & NonillumD80

5A Power Level & 0.4VA Logic Level
Full Face & Spot Illumination; Bicolor Alternating Legends
Solder Lug & Straight PC
PCB & Snap-in Mount



UB2 Series Illum & NonillumD92

5A Power Level & 0.4VA Logic Level
Variety of Illumination Effects; Alternating Legends
Bright, Super Bright, & Bicolor LEDs
Solder Lug & Straight PC; PCB & Snap-in Mount



YB Series Illum & Nonillum D104

3A Power Level & 0.4VA Logic Level
Full Face & Spot Illumination
Incandescent & Multi-element LEDs
Solder Lug/Quick Connect & Straight PC
Bushing & Snap-in Mount



YB2 Series Illum & Nonillum D118

22mm Flush Mount Panel Seal
3A Power Level & 0.4VA Logic Level
Cap Option with Illumination Ring
Solder Lug/Quick Connect

Toggles

Rockers

Pushbuttons

D Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

Distinctive Characteristics

Brilliant illumination for highly visible status indication with LEDs and caps in red, green, or amber; subdued illumination for low light requirements with white cap over red, green, or amber LEDs.

Photo interrupter, rather than contacts, ensures high reliability and long life of 3 million operations minimum.

Rugged construction and smooth actuation allow repeated, rapid actuation force anywhere on cap surface.

Snap-in mounting for easy installation.

Connector socket with 6 pins for simple connection.


Well suited for gaming and vending machines, as well as equipment exposed to corrosive gases used in environments such as chemical or steel manufacturing plants.



Actual Size



TYPICAL SWITCH ORDERING EXAMPLE

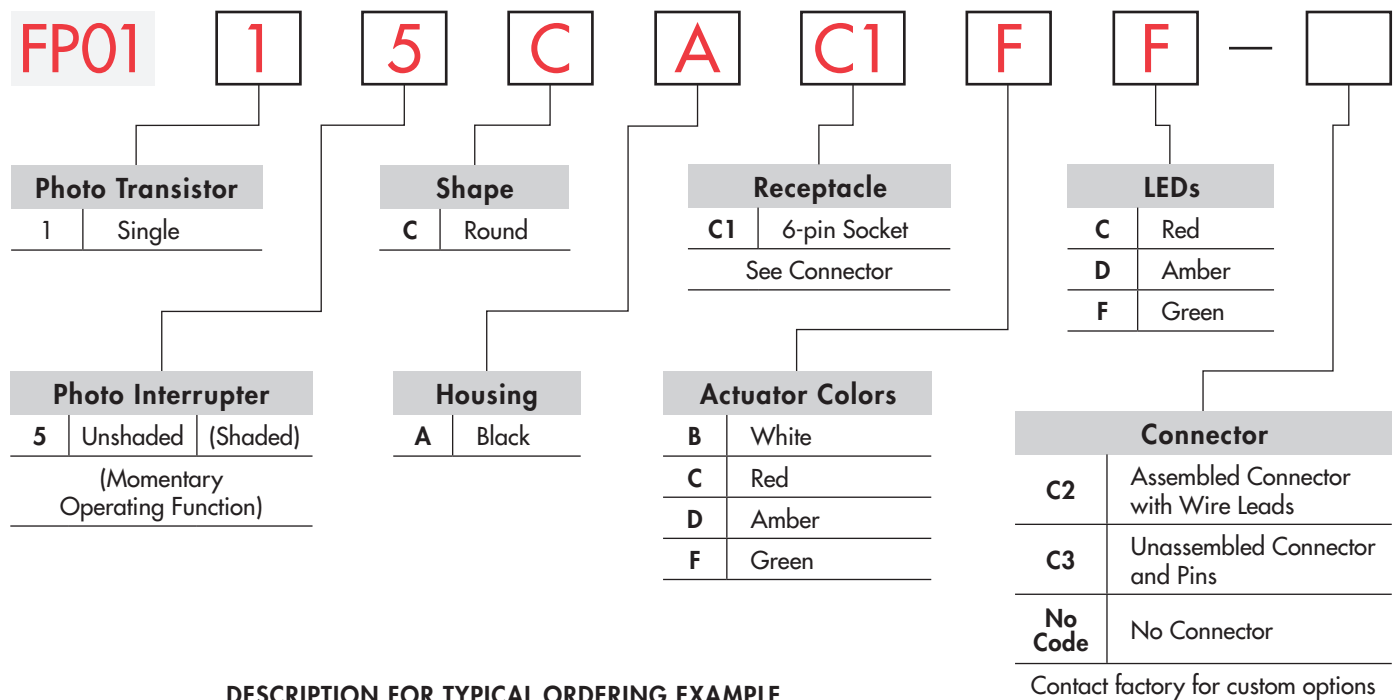

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

FP0115CAC1FF



ACTUATOR & INTERRUPTER


		Actuator Position		Photo Interrupter		Schematics
Model	1	Normal	Down	Unshaded	Shaded	LED connector pins are 5 & 6; interrupter connector pins are 3-4 & 1-2.
				5	Normally Unshaded with Momentary Shaded status	
FP0115	Single Photo Transistor	When shaded, the photo transistor momentarily activates electrical function which signals the external device to change its state.				

HOUSING SHAPE & COLOR

C Round Shape

A Black Housing

C1 6-pin Socket



SWITCH SPECIFICATIONS

	Actuator Up	Actuator Down
Status of Photo Interrupter:	Unshaded	Shaded
Collector Current I_C :	0.8mA minimum	10 μ A maximum
Status of Photo Transistor:	On	Off
Output Condition of Photo Transistor:	$I_F = 20\text{mA}$ & $V_{CE} = 5\text{V}$	

MECHANICAL SPECIFICATIONS

Total Travel:	.079" (2.0mm)
Operating Force:	0.75 N (.169 lbf)
Mechanical Life:	3,000,000 operations minimum
Operating Temperature Range:	-25°C through +50°C (-13°F through +122°F)

MATERIALS

Actuator: Polyacetal Housing: Polyamide


PHOTO INTERRUPTER SPECIFICATIONS

(Temperature @ 25°C)

Electrical & Optical Characteristics	Typical	Maximum	Condition
Input			
Forward Voltage V_F :	1.3V	1.6V	$I_F = 50\text{mA}$
Reverse Current I_R :		10 μ A	$F_R = 5\text{V}$
Transmission			
Collector-Emitter Saturation Voltage $V_{CE \text{ sat}}$:		0.4V	$I_F = 20\text{mA}$ & $I_C = 0.1\text{mA}$
Absolute Maximum Ratings			
Input LED		Output Photo Transistor	
Typical Forward Current I_F :	50mA	Collector-Emitter Voltage V_{CEO} :	30V
Reverse Voltage V_R :	5V	Emitter-Collector Voltage V_{ECO} :	4.5V
Power Dissipation P_D :	80mW	Collector Current I_C :	30mA
		Collector Dissipation P_C :	80mW


Circuit Design Considerations

Output of the infrared LED in the photo interrupter decreases approximately 50% after 100,000 hours.
Recommended load resistance (R_L) is 40k ~ 120k Ω for the illustrated circuit.



LED COLORS & SPECIFICATIONS

LEDs are an integral part of the switch and not available separately. The electrical specifications shown are determined at a basic temperature of 25°C.



Where: R = Resistor Value (Ohms)
 E = Source Voltage (V)
 V_F = Forward Voltage (V)
 I_F = Forward Current (A)

If the source voltage exceeds the rated voltage, a ballast resistor is required.

Single Element LED	Color	C Red	D Amber	F Green
Maximum Forward Current	I_{FM}	30mA	25mA	30mA
Typical Forward Current	I_F	20mA	20mA	20mA
Forward Voltage	V_F	1.85V	2.0V	2.1V
Maximum Reverse Voltage	V_{RM}	5V	5V	10V
Current Reduction Rate Above 25°C	ΔI_F	0.38mA /°C	0.28mA /°C	0.40mA /°C
Ambient Temperature Range		-25° ~ +50°C		

ACTUATOR COLORS

B White	C Red	D Amber	F Green
----------------	--------------	----------------	----------------

CONNECTOR OPTIONS

C2 AT021 Assembled Connector with Wire Leads


Connector body: JST model ZHR-6
Crimp connector pins: JST model SZH-002T-P0.5
Wire leads: 28-26AWG; 12-inch, unstripped;
Blue for Pin 1



C3 AT022 Unassembled Connector and Pins

1 connector and 8 crimp connector pins
only (no wire leads provided).

Matching wire leads: 28-26AWG

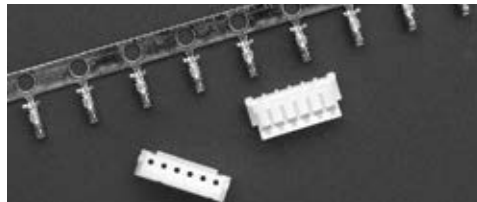


No Code

No Connector

Recommended connector
for assembly:
JST model number ZHR-6

Recommended crimp
connector pins:
JST model SZH-002T-P0.5
for 28-26AWG wire leads
or SZH-003T-P0.5 for
32-28AWG wire leads.

TYPICAL SWITCH DIMENSIONS

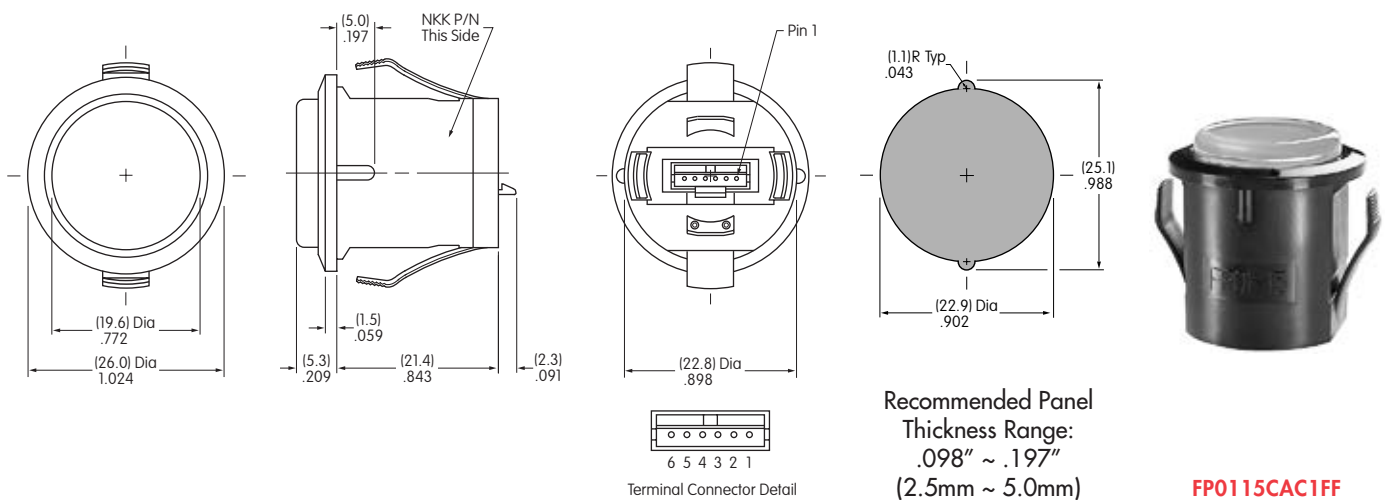

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for FP01 Cap



Recommended Methods:

Screen Print on cap.
Epoxy based ink is recommended.



Shaded area is printable area.

General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 50,000 operations minimum
Electrical Life: 50,000 operations minimum
Nominal Operating Force: 1.70N
Travel: Pretravel .035" (0.9mm); Overtravel .008" (0.2mm); Total Travel .043" (1.1mm)

Materials & Finishes

Plunger: Polyamide
Case: Glass fiber reinforced polyamide
Sealing Rings: Nitrile butadiene rubber
Movable Contact: Phosphor bronze with gold plating
Stationary Contacts: Phosphor bronze with gold plating
Base: Glass fiber reinforced polyamide
Switch Terminals: Phosphor bronze with gold plating
Lamp Terminals: Phosphor bronze with gold plating

Environmental Data

Operating Temperature Range: -25°C through +55°C (-13°F through +131°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 500Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 15 minutes; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

PCB Processing

Soldering: Wave Soldering recommended. See Profile A in Supplement section.
Manual Soldering: See Profile A in Supplement section.
Cleaning: Automated alcohol based cleaning recommended, 5 minutes maximum. Do not use high-purity alcohol (50% alcohol or more) or organic solvent. High alcohol solution can damage clear plastic. See Cleaning specifications in Supplement section.

Standards & Certifications

The GB Series illuminated pushbuttons have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Fully illuminated plunger for highly visible status indication with single color LED in red, green, or amber.

Ultra-miniature size allows high density mounting, and extremely light weight makes these switches ideal for handheld equipment.

Totally sealed body construction prevents contact contamination and allows time- and money-saving automated soldering and cleaning. Insert-molded terminals lock out flux, solvents, and other contaminants.


Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smooth, positive detent actuation, increased contact stability, and unparalleled logic-level reliability. (Additional STC details in Terms & Acronyms; see Supplement section.)

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing. Round terminals facilitate easier through-hole mounting on PC boards.

Nonilluminated pushbuttons available and shown in the Pushbutton section.



Actual Size



TYPICAL SWITCH ORDERING EXAMPLE

GB

1

5

J

H

F

Pole	
1	SPDT

Circuit		
5	ON	(ON)
() = Momentary		


Actuator	
J	Clear

PC Terminals	
P	Straight
H	Right Angle
V	Vertical

LEDs	
C	Red
D	Amber
F	Green

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

GB15JHF

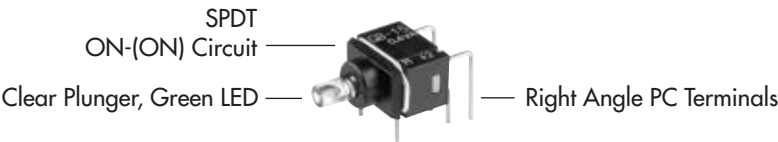


POLE & CIRCUIT

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
Pole	Model	Normal	Down	Normal	Down	Note: Terminal numbers are not actually on the switch. LED circuit is isolated and requires an external power source.
SP	GB15	ON	(ON)	5-6	5-4	SPDT

ACTUATOR

J Clear Plunger




LED COLORS & SPECIFICATIONS

LEDs are an integral part of the switch and not available separately. The electrical specifications shown are determined at a basic temperature of 25°C. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section.	Colors	C Red	D Amber	F Green
	Maximum Forward Current	I_{FM} 30mA	30mA	30mA
	Typical Forward Current	I_F 20mA	20mA	20mA
	Forward Voltage	V_F 1.95V	2.0V	2.1V
	Maximum Reverse Voltage	V_{RM} 5V	5V	5V
	Current Reduction Rate Above 25°C	ΔI_F 0.40mA/°C	0.40mA/°C	0.40mA/°C
	Ambient Temperature Range	-25° ~ +55°C		


PC TERMINALS




Straight







Right Angle



Vertical



TYPICAL SWITCH DIMENSIONS







Straight PC



Terminals 1 & 3 are lamp terminals.

GB15JPD





Right Angle PC



Terminals 1 & 3 are lamp terminals.

GB15JHF

Vertical PC

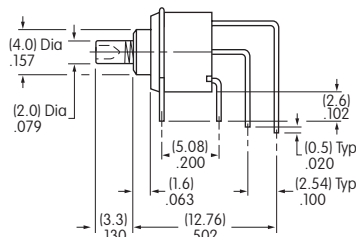

Terminals 1 & 3 are lamp terminals.

GB15JVC

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 0.1A maximum @ 30V AC/DC

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 100 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 100,000 operations minimum
Electrical Life: 50,000 operations minimum
Nominal Operating Force: 3.43N
Contact Timing: Nonshorting (break before make)
Travel: Pretravel .087" (2.2mm); Overtravel .031" (0.8mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing: Glass fiber reinforced polyamide
Base: Glass fiber reinforced polyamide
Movable Contact: Phosphor bronze with silver plating
Stationary Contacts: Phosphor bronze with silver plating
Common Terminal: Phosphor bronze with silver plating
End Terminals: Phosphor bronze with silver plating
Lamp Terminals: Phosphor bronze with silver plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Mounting Torque: 0.49Nm (4.34 lb•in) maximum for round mounting nut
Cap Installation Force: 9.8N (2.2 lbf) maximum downward force on cap
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.
 All models recognized at 0.1A @ 30V AC/DC.

Distinctive Characteristics

Full face and spot illumination available. Front panel relamping.

Choice of super bright LEDs in white, green, and blue in addition to bright red, amber, and green LEDs.

Compact front panel design with 9mm square or round bezel options.

Rear panel threaded mounting. Behind panel depth of less than one inch. 8mm body diameter fits common size panel cutout.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.


Dual, sliding contacts with self-cleaning action provide contact stability, high reliability, and increased operating life.

Solder lug terminals have spacing of .100" (2.54mm) for choice of mounting.


Longer normally closed terminal facilitates wiring and soldering.

Molded-in terminals lock out flux, dust, and other contaminants.


Matching indicators available.

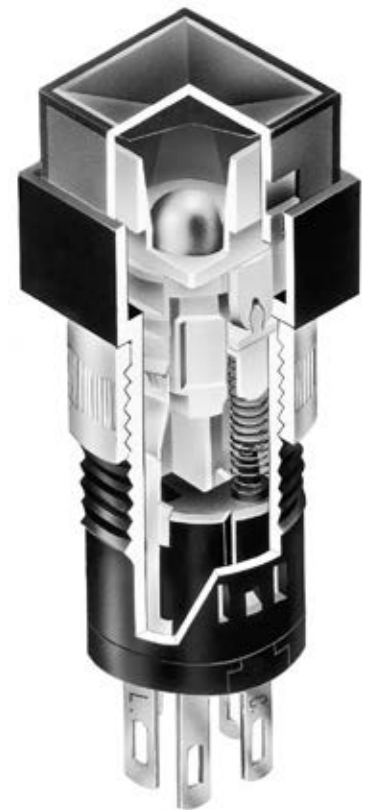

Actual Size




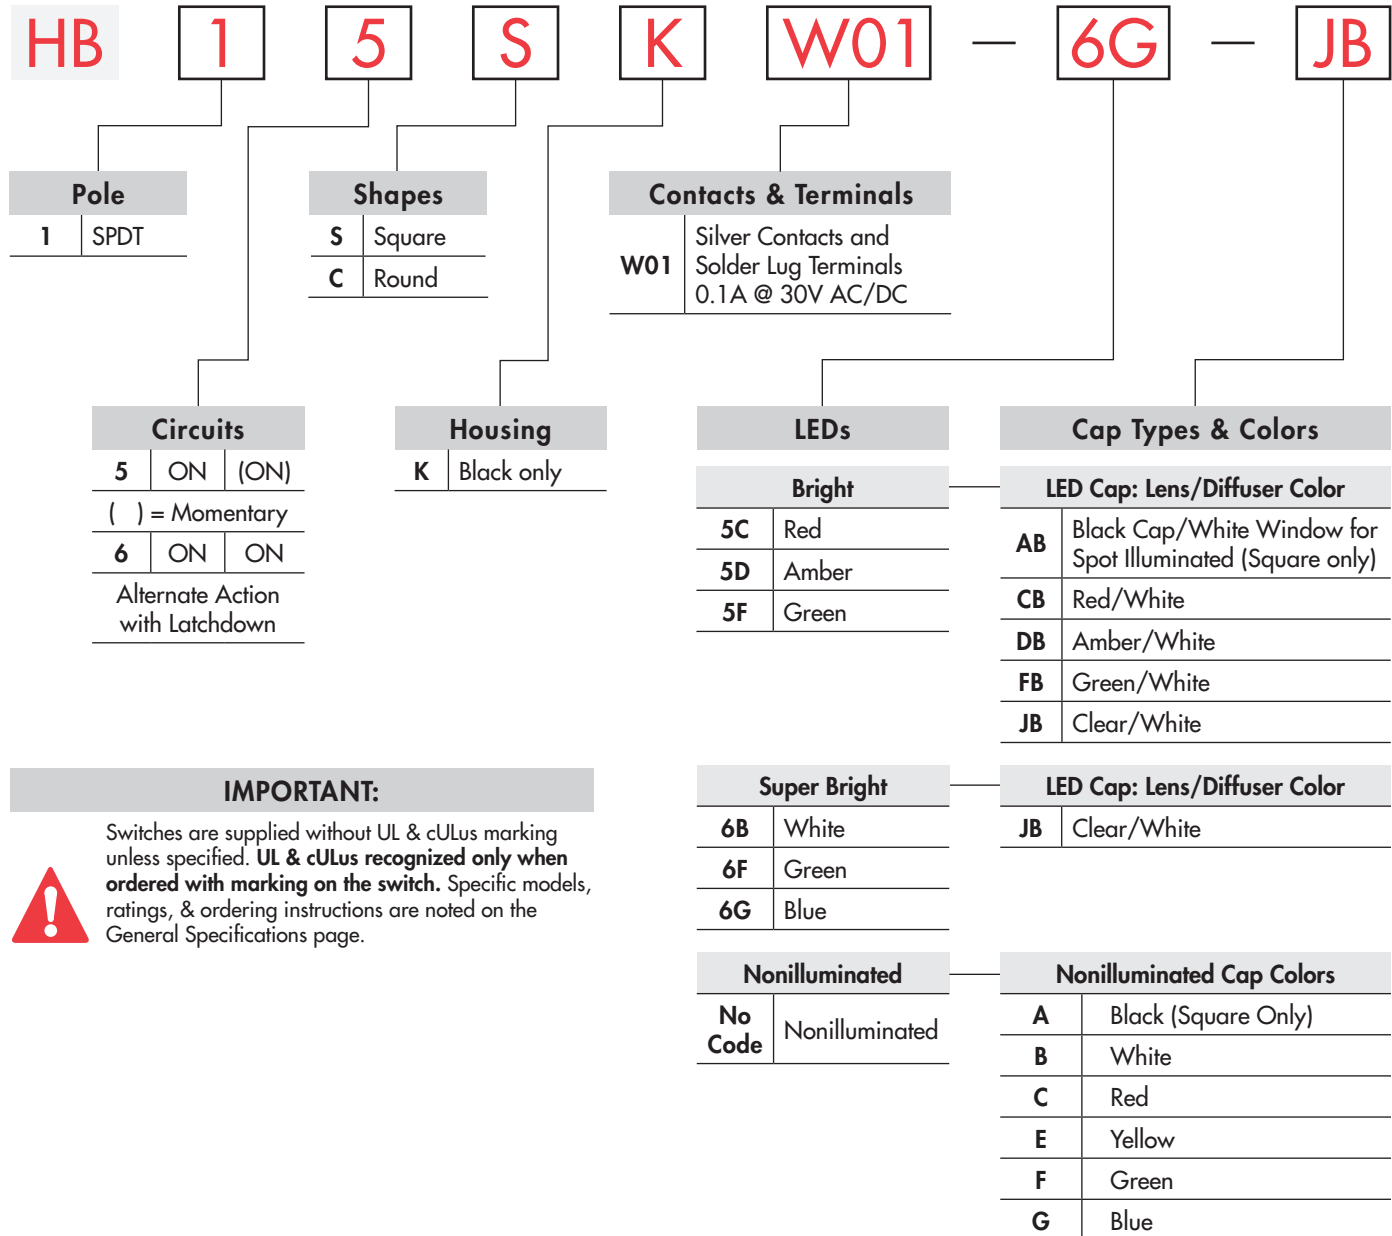

TYPICAL SWITCH ORDERING EXAMPLE



DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

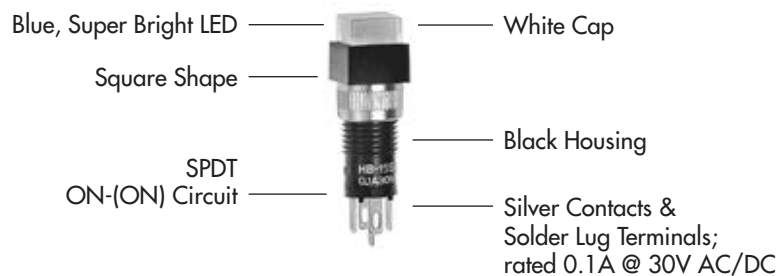HB15SKW01-6G-JB



POLES & CIRCUITS						
		Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
Pole	Model	Normal	Down	Normal	Down	Notes: Switch is marked with NO, NC, C, L. LED circuit is isolated and requires external power source.
SP	HB15 *HB16	ON ON	(ON) ON	1-3	1-2	SPDT  

* When in latchdown position for the alternate circuit, cap position is .051" (1.3mm) above the built-in bezel.

SHAPES & PANEL CUTOUT




.354" (9.0mm) Square




.354" (9.0mm) Round

The bezel is an integral part of the switch body.




The bezel is an integral part of the switch body.



Panel Cutout & Mounting

Recommended Panel Thickness:
.020 ~ .197" (0.5 ~ 5.0mm)



Overtightening the mounting nut AT073 may damage the switch housing.

HOUSING



Housing available in black only.

CONTACT MATERIALS, RATINGS, & TERMINALS




Silver Contacts

Power Level

0.1A maximum @ 30V AC/DC

Solder Lug






PCB Mounting

Solder lug terminals are spaced .100" x .200" (2.54mm x 5.08mm). This enables PCB mounting which can be accomplished by elongating PC board holes to .080" (2.03mm).

Toggles
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source. Single element LED is colored in OFF state.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

Bright AT633		Note for Super Bright:  Color		Bright			Super Bright			Unit
				5C	5D	5F	6B	6F	6G	
Super Bright AT624G Blue		Maximum Forward Current	I_{FM}	30	30	30	30	30	30	mA
AT629B White		Typical Forward Current	I_F	20	20	20	20	20	20	mA
AT630F Green		Forward Voltage	V_F	2.1	2.05	2.1	3.3	3.3	3.3	V
		Maximum Reverse Voltage	V_{RM}	10	10	10	7	7	7	V
		Current Reduction Rate Above 25°C	ΔI_F	0.40	0.40	0.40	0.40	0.40	0.40	mA/°C
T-1 Bi-pin		Ambient Temperature Range		-25° ~ +50°C			-25° ~ +50°C			

No Code

No Lamp

CAP TYPES & COLORS

Color Codes: A Black B White C Red D Amber E Yellow F Green G Blue J Clear

Cap Colors Available:


AB

Black Cap with Translucent
White Window for LED Display

Colored Cap for Bright LEDs

Square only
Material: Polycarbonate
Finish: Matte

AT4052
Spot Illuminated



Lens/Diffuser Colors Available:

CB

Red/White


DB

Amber/White


FB

Green/White


AT4166
Square



AT4167
Round



Material: Polycarbonate Finish: Glossy



Transparent Colored
Lens



Translucent
White Diffuser




Colored LED
AT633

White Cap for Bright & Super Bright LEDs


JB

Clear Lens/
White Diffuser


AT4031
Square



AT4032
Round



Material: Polycarbonate
Finish: Glossy



Transparent Clear
Lens



Translucent
White Diffuser



Colored LEDs
AT624, AT629,
AT630, or AT633

Nonilluminated Caps

Cap Colors Available:

A

Black
(Square Only)

C

Red

F

Green

B

White

E


Yellow

G


Blue

Material: Polycarbonate Finish: Glossy

AT4035
Square





AT4036
Round



TYPICAL SWITCH DIMENSIONS

Single Pole


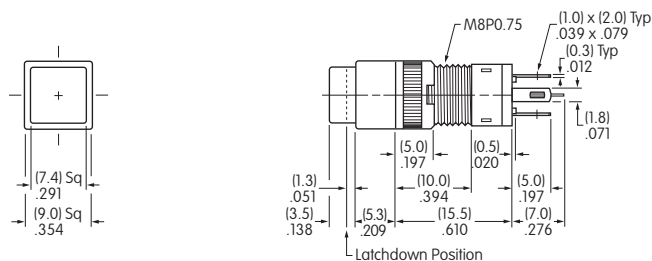


Square



HB155KW01-5C-CB

Single Pole

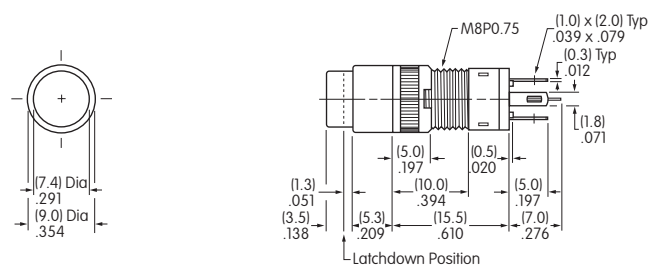

Round




HB16CKW01-5C-CB

ASSEMBLY INSTRUCTIONS


Cap Removal

1. Have cap in extended position (not latchdown) for alternate action models.
2. Use the grip slots on the sides of the cap and pull it out of the switch.



LED Polarity & Orientation in Lamp Socket


For AT624, AT629, AT630 and AT633:
 Insert the LED with the D flat opposite the black dot molded inside the switch lamp socket.

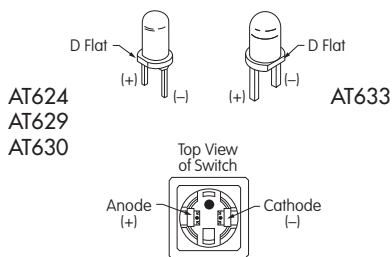

Super Bright LEDs AT624, AT629, & AT630 are electrostatic sensitive.

Cap Replacement

1. Match the prongs on the cap base with the projections in the switch, at the same time aligning the spring clips on the cap with the indentations in the switch.
2. Press firmly in place.



AT111 Lamping Tool

Lamping Tool AT111 may be used to remove and replace LED.



AT110 Socket Wrench

Socket Wrench AT110 may be used to tighten the mounting nut.



General Specifications

Electrical Capacity (Resistive Load)

Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 100,000 operations minimum for momentary;
Electrical Life: 100,000 operations minimum
Nominal Operating Force: 1.8N
Travel: Pretravel .051" (1.3mm); Overtravel .020" (0.5mm); Total Travel .071" (1.8mm)

Materials & Finishes

Housing: Glass fiber reinforced polyamide
Base: Glass fiber reinforced polyamide
Movable Contact: Phosphor bronze with gold plating
Switch Terminals: Brass with gold plating
Lamp Terminals: Steel with silver plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 15.0N (3.37 lbf) maximum downward force on cap

PCB Processing

Soldering: Wave Soldering: See Profile A in Supplement section.
Manual Soldering: See Profile B in Supplement section.
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

The HB2 pushbuttons have not been tested for UL recognition or CSA certification.
These switches are designed for use in a low-voltage, low-current, logic-level circuit.
When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Quiet actuation combined with crisp tactile feedback suited for broadcast equipment.

Full face illumination with choice of red/green or red/yellow bicolor LEDs, as well as simultaneous bicolor illumination which produces amber.


Option of legends on caps or film insert.

Compact design with short body .669" (17.0mm) from PCB to top of cap and .295" (7.5mm) square cap.


Sliding Twin Crossbar (STC) mechanism provides unequalled logic-level reliability, contact stability, smooth positive detent actuation, and long life.

Crimped power terminals ensure secure PCB mounting and prevent dislodging during soldering.

Suitable applications include broadcast, telecommunication, and medical equipment, as well as measuring instruments, etc.

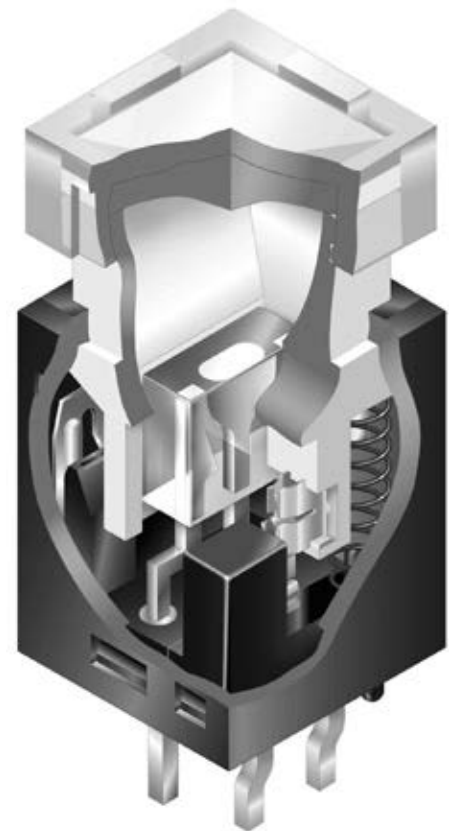


Actual Size



TYPICAL SWITCH ORDERING EXAMPLE

HB2	1	5	S	K	G03	CF	—	JB
Pole		Shape		Contacts & Terminals		Cap Colors		
1 SPST		S Square		G03 Gold Contacts and PC Terminals, Rated 0.4VA @ 28V AC/DC		JB Clear Lens/White Diffuser		
Circuit				Housing		LEDs		
5 OFF (ON) () = Momentary				K Black		CE Red/Yellow CF Red/Green		
						Amber can be achieved by simultaneous illumination of LEDs.		

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE
HB215SKG03CF-JB

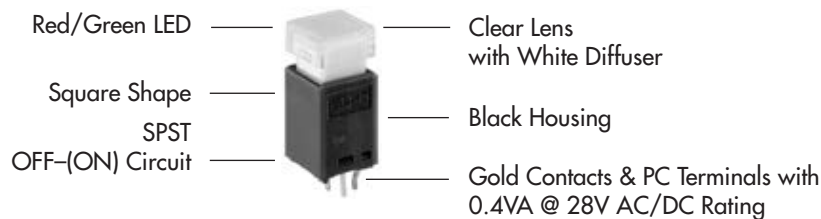

POLE & CIRCUIT

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal	Down	Normal	Down	
SP	HB215	OFF	(ON)	OPEN	1-2	Notes: Switch terminals are not marked on the switch. Red LED terminal is marked with "R". Lamp circuit is isolated and requires external power source.


HOUSING SHAPE & COLOR

S	.307" (7.8mm) Square Body	K	Black Housing
----------	---------------------------	----------	---------------


CONTACT MATERIALS, RATINGS & TERMINALS

G03	Gold Contacts	Logic Level	0.4VA maximum @ 28V AC/DC maximum
------------	---------------	-------------	-----------------------------------


Switch Terminal




Lamp Terminal



PCB Footprint



BICOLOR LEDS & SPECIFICATIONS



Where: R = Resistor Value (Ohms)
 E = Source Voltage (V)
 V_F = Forward Voltage (V)
 I_F = Forward Current (A)

LED is an integral part of the switch.

Color	Red/Yellow		Red/Green	
	Red	Yellow	Red	Green
Maximum Forward Current	I _{FM}	* 30mA	* 30mA	* 25mA
Typical Forward Current	I _F	20mA	20mA	20mA
Forward Voltage	V _F	2.0V	2.2V	2.0V
Maximum Reverse Voltage	V _{RM}	5V	5V	5V
Current Reduction Rate Above 25°C	ΔI _F	0.40mA/°C	0.33mA/°C	0.40mA/°C
Ambient Temperature Range	-25° ~ +50°C			

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section.


* Value applies to single color illumination for either Red or Yellow or Red or Green. When both colors are illuminated simultaneously, the sum of the currents should not exceed the smallest value of the maximum forward current.

CAP COLORS




Clear Transparent Lens

AT3081
Square Lens



White Translucent Diffuser



AT3082
Square Diffuser




Lens & Diffuser Material: Polycarbonate Lens Finish: Glossy Diffuser Finish: Frosted

TYPICAL SWITCH DIMENSIONS

Single Pole

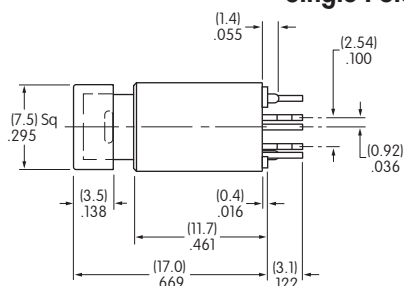

Square




HB215SKG03CF-JB

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for HB2 Lens & Film Insert


Recommended Methods: Screen Print or Pad Print on Lens; Laser Print on Film Insert.
 Epoxy based ink is recommended. Film Insert: Clear Polyester, 4 mil max. thickness



Lens



Film Insert



Shaded areas are printable areas.

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 1A @ 125/250V AC or 1A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 1,000 megohms minimum @ 500V DC
Dielectric Strength: For Silver: 1,000V AC minimum between contacts for 1 minute minimum & 1,500V AC minimum between contacts & case for 1 minute minimum;
 For Gold: 750V AC minimum between contacts for 1 minute minimum & 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 100,000 operations minimum
Electrical Life: 50,000 operations minimum for silver; 100,000 operations minimum for gold
Nominal Operating Force: Single pole 0.98 ~ 2.45N for maintained & 0.98 ~ 1.96N for momentary;
 Double pole 1.47 ~ 3.43N for maintained & 1.47 ~ 2.94N for momentary
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .087" (2.2mm); Overtravel .031" (0.8mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing: Polyamide (UL94V-0)
Movable Contactor: Silver for power circuit; copper with gold plating for logic level circuit
Stationary Contacts: Silver for power circuit; copper with gold plating for logic level circuit
Housing Base: Polyamide (UL94V-0)
Terminal Base: Polyester
Common Terminals: Phosphor bronze with silver flash plating for power circuit;
 Phosphor bronze with gold flash plating for logic level circuit
End Terminals: Brass with silver flash plating for power circuit;
 Brass with gold flash plating for logic level circuit
Lamp Terminals: Phosphor bronze with nickel flash plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 3 shocks in each direction)

Installation

Mounting Torque: 0.78Nm (6.9 lb•in) maximum
Cap Installation Force: 4.51N (1.0 lbf) maximum downward force on cap
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing & housing base
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.
 Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.
CSA: **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
 Add "/C" before first dash in part number to order CSA certified switch.
 Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.

Distinctive Characteristics

Bright illumination with numerous color variations. Spot illumination available. Square, rectangular, and round shaped caps.

Front panel relamping.

Choice of bright or super bright LEDs in red, amber, green, white, and blue.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.

Snap-action mechanism for long life.

Stainless steel frame on snap-in models has a specially designed projection, which prevents rotation and correctly orients switch in panel.

12mm body diameter.

Molded-in terminals lock out flux, dust, and other contaminants.


8mm panel thickness capability. Rear panel bushing or snap-in mounting.

Optional PCB adaptors in straight and right angle types.

Matching indicators available.



Actual Size

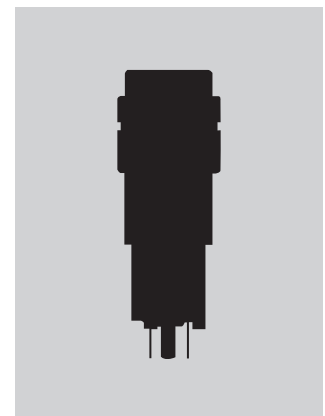

Toggles

Rockers

Pushbuttons

D Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt


Touch

Indicators

Accessories

Supplement

TYPICAL SWITCH

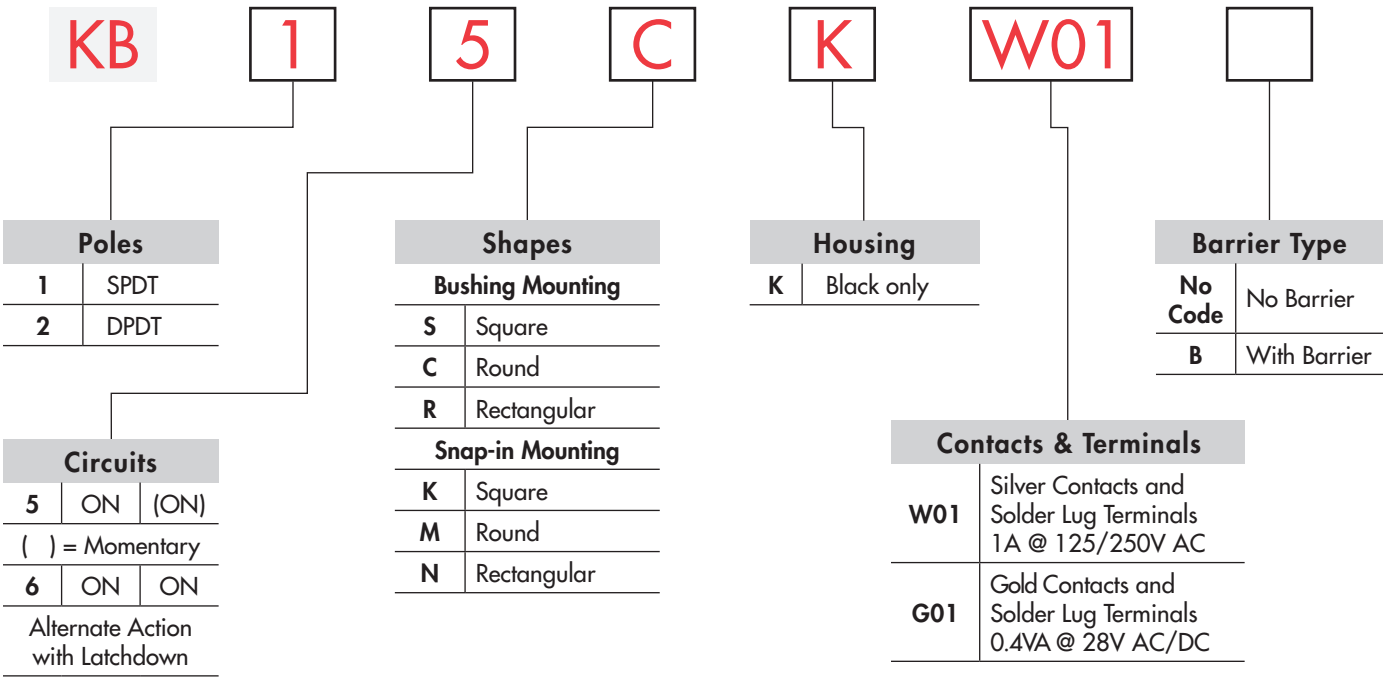

IMPORTANT:



Switches are supplied without UL, cULus & CSA marking unless specified.
UL, cULus & CSA recognized only when ordered with marking on the switch.
Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE







KB15CKW01-12-FF



ORDERING EXAMPLE

— 12 — FF			
Lamps		Cap Types & Colors	
Incandescent Lamp Used with Solid Cap		Solid Cap: Lens/Filter Colors	
05	5-volt	A	Black/None (Nonilluminated Only. Available in Square and Round Only.)
12	12-volt	BB	White/White
No Code	Nonilluminated	FB	Green/White
		CB	Red/White
		FF	Green/Green
		CC	Red/Red
		GB	Blue/White
		EB	Yellow/White
		GG	Blue/Blue
Incandescent or Neon Used with Insert Cap		Insert Cap: Lens/Filter Colors	
05	5-volt	JB	Clear/White
12	12-volt	JC	Clear/Red
01	110-volt Neon	JE	Clear/Yellow
No Code	Nonilluminated	* JF	Clear/Green
		* JG	Clear/Blue
		* JF & JG not suitable with neon.	
Bright LED Used with Cap for LED		LED Cap: Lens/Diffuser Colors	
Colors		Resistor	
5C	Red	No Code	No Resistor
5D	Amber	05	5-volt
		12	12-volt
5F	Green	24	24-volt
Super Bright LED Used with Cap for LED		LED Cap: Lens/Diffuser Colors	
6B	White	JB	Clear/White
6F	Green		
6G	Blue		

POLES & CIRCUITS

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal 	Down 	Normal 	Down 	
SP	KB15 *KB16	ON ON	(ON) ON	2-3	2-1	SPDT 
DP	KB25 *KB26	ON ON	(ON) ON	2-3 5-6	2-1 5-4	DPDT 


* When in latchdown position for the alternate circuit, cap position is .055" (1.4mm) above the built-in bezel.

MOUNTING TYPES & SHAPES


Bushing Mounting

S

.551" (14.0mm)
Square




No barrier



With barrier


C

.551" (14.0mm)
Round




R

.551" x .728" (14.0mm x 18.5mm)
Rectangular



No barrier




With barrier

Bezel or barrier is an integral part of the switch body. One mounting nut AT057 supplied with each switch.


Snap-in Mounting

K

.551" (14.0mm)
Square




No barrier



With barrier


M

.551" (14.0mm)
Round




N

.551" x .728" (14.0mm x 18.5mm)
Rectangular



No barrier




With barrier

Bezel or barrier is an integral part of the switch body.


Panel Cutouts

Bushing Mounting

Without
Keyway




Panel Thickness:
.020" ~ .315"
(0.5 ~ 8.0mm)



With
Keyway

Snap-in Mounting

Panel Thickness:
.039" ~ .138"
(1.0 ~ 3.5mm)



Panel thicknesses, when using optional accessories, are shown with the accessories at the end of this KB section.

HOUSING

K

Housing available in black only. Bezel or barrier is an integral part of the switch body.

CONTACT MATERIALS, RATINGS & TERMINALS

W

Silver Contacts

Power Level

1A @ 125V AC & 250V AC

01

Solder Lug


G

Gold Contacts

Logic Level

0.4VA maximum @ 28V AC/DC

Complete explanation of operating range in Supplement section.




AT055 Crossover Guard

A partitioned plastic guard is supplied with each switch to provide insulation between terminals.

Installation steps:

1. Identify wire-to-terminal connections.
2. Thread wires through the guard.
3. Solder the connections.
4. Push the guard fully onto the switch body.



BARRIER TYPE

No Code

No Barrier

Built-in bezel

B



With Barrier

Built-in barrier only available for Square and Rectangular

LAMP COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source. Polarity marks are on the bottom of the switch.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.
Ambient Temperature Range for lamps below: -25°C ~ +50°C.


Incandescent & Neon Lamps

AT611 Incandescent	AT615 Neon		05	12	01	Recommended Resistors for Neon: 33K ohms for 110V AC; 100K ohms for 220V AC
		Voltage	V	5V AC	12V AC	110V AC
		Current	I	115mA	60mA	1.5mA
		Endurance	Hours	7,000 average		10,000

No Code


No Lamp

Bright LED with Resistor

<div>AT634</div> <div>LEDs are colored in OFF state.</div> <div></div> <div>T-1¼ Bi-pin</div>	Red	Amber	Green	Resistor Codes			
	Color Codes:	<div>5C</div>	<div>5D</div>	<div>5F</div>	<div>05</div>	<div>12</div>	<div>24</div>
	Maximum Forward Current			I_{FM}	—	—	—
	Typical Forward Current			I_F	25mA	20mA	10mA
	Forward Voltage			V_F	5V	12V	24V
	Maximum Reverse Voltage			V_{RM}	4V	8V	16V
	Current Reduction Rate Above 25°C			ΔI_F	—	—	—

AT634

5-volt
2-element
with 1 Resistor




AT634

12-volt
4-element
with 2 Resistors



AT634

24-volt
4-element
with 2 Resistors



LAMP COLORS & SPECIFICATIONS

Bright LED without Resistor

AT635

LEDs are colored in OFF state.



T-1 1/2 Bi-pin

	Red	Amber	Green	No Resistor		
Color Codes	5C	5D	5F	No Code		
Maximum Forward Current	I_{FM}			30mA	30mA	30mA
Typical Forward Current	I_F			20mA	20mA	20mA
Forward Voltage	V_F			1.9V	2.0V	2.1V
Maximum Reverse Voltage	V_{RM}			5V	5V	5V
Current Reduction Rate Above 25°C	ΔI_F			0.42mA/°C		
Ambient Temperature Range				-25° ~ +50°C		

Super Bright Single Element LED

AT625G Blue

AT631B White

AT632F Green



T-1 Bi-pin

	ATTENTION ELECTROSTATIC SENSITIVE DEVICES					
Color				6B	6F	6G
Maximum Forward Current	I_{FM}			White	Green	Blue
Typical Forward Current	I_F			30mA	30mA	30mA
Forward Voltage	V_F			20mA	20mA	20mA
Maximum Reverse Voltage	V_{RM}			3.3V	3.3V	3.3V
Current Reduction Rate Above 25°C	ΔI_F			7V	7V	7V
Ambient Temperature Range				0.40mA/°C	0.40mA/°C	0.40mA/°C
				-25° ~ +50°C		

CAP TYPES & COLOR COMBINATIONS

Color Codes: A Black B White C Red E Yellow F Green G Blue J Clear


Solid Cap for Incandescent Lamp & Nonilluminated

Lens/Filter Colors Available:


A Nonilluminated Only; Square & Round Only

BB	FB
CB	FF
CC	GB
EB	GG


AT485 Square




AT486 Round



AT4021 Rectangular



Translucent Colored Lens



Translucent Colored Filter



Lamp AT611


Material: Polycarbonate Finish: Glossy

Insert Cap for Incandescent or Neon Lamp & Nonilluminated


Lens/Filter Colors Available:

JB	JF
JC	JG
JE	


AT487 Square



AT488 Round



AT4022 Rectangular



Transparent Clear Lens



Translucent Colored Filter



Lamp AT611 Lamp AT615

JF and JG not suitable with neon lamp.

Material: Polycarbonate Finish: Glossy

CAP TYPES & COLOR COMBINATIONS

Color Codes: **A** Black **B** White **C** Red **D** Amber **E** Yellow **F** Green **G** Blue **J** Clear



Spot Illuminated Cap for Bright LED without Resistor or with Resistor

Cap/Window Colors Available:

AB

Opaque Black Cap with
Translucent White Window
for Spot Illumination

AT4051
Square



Bright LED
AT635

Bright LED
AT634

Material: Polycarbonate Finish: Matte

Cap for Bright LED without Resistor or LED with Resistor

Lens/Diffuser Colors Available: (AT4133, 4132, 4134 white diffusers; AT4158, 4160, 4159 colored diffusers)

JB

AT4133

AT4132

AT4134



Square

Round

Rectangular

Transparent Clear Lens

JC

AT4158




AT4160

AT4159



JD

JF



Translucent Diffuser



Bright LED
AT635

Bright LED
AT634

Material: Polycarbonate Finish: Glossy

Cap for Super Bright LED

Lens/Diffuser Colors Available:

JB

AT4133
Square

AT4132
Round




AT4134
Rectangular



Translucent Clear Lens



Translucent White Diffuser



Super Bright LEDs
AT625
AT631 AT632




Material: Polycarbonate Finish: Glossy

Toggles
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

TYPICAL SWITCH DIMENSIONS

Square • Bushing Mount

Single & Double Pole


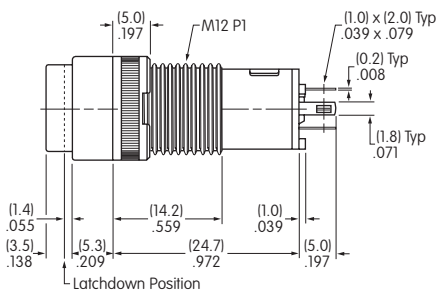



KB15SKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

Round • Bushing Mount

Single & Double Pole


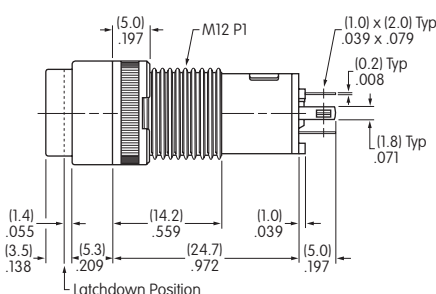



KB25CKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Bushing Mount

Single & Double Pole

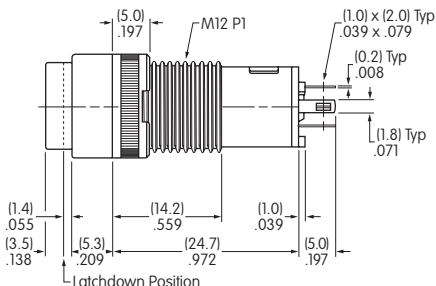



KB15RKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

TYPICAL SWITCH DIMENSIONS

Single & Double Pole

Square • Snap-in Mount


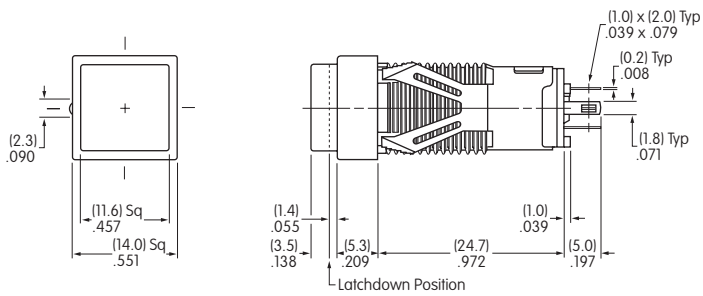


Single pole models do not have terminals 4, 5, & 6.

KB16KKW01-05-CB

Single & Double Pole

Round • Snap-in Mount


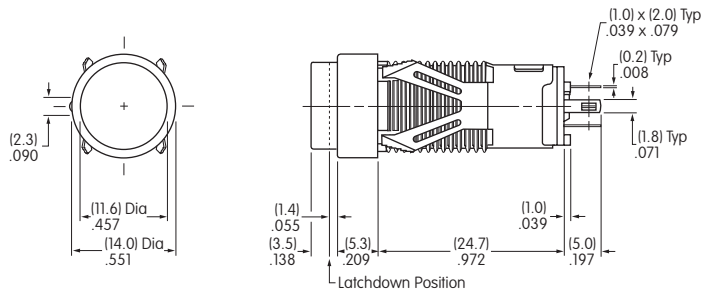


Single pole models do not have terminals 4, 5, & 6.

KB26MKW01-05-CB

Single & Double Pole

Rectangular • Snap-in Mount

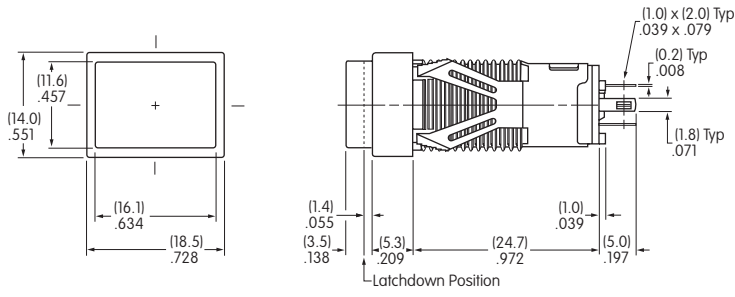

Single pole models do not have terminals 4, 5, & 6.




KB16NKW01-05-CB

Toggles
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

TYPICAL SWITCH DIMENSIONS

Square • Barrier • Bushing Mount

Single & Double Pole


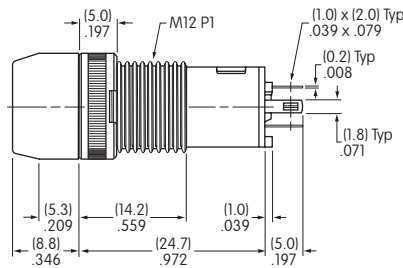



KB15SKW01B-6G-JB

Single pole models do not have terminals 4, 5, & 6.

Square • Barrier • Snap-in Mount

Single & Double Pole


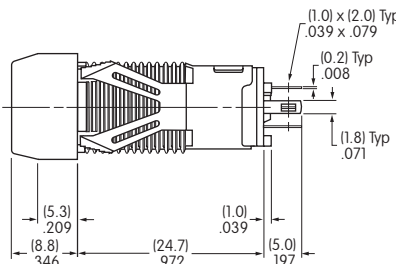



KB15KKW01B-5C-JC

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Barrier • Bushing Mount

Single & Double Pole


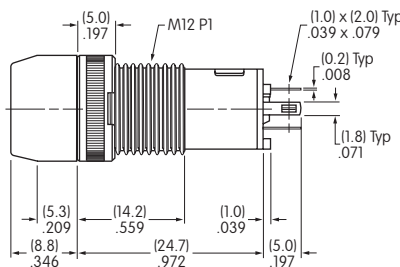



KB15RKW01B-5F-JF

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Barrier • Snap-in Mount

Single & Double Pole

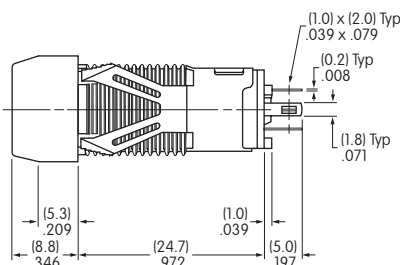


KB15NKW01B-5D-JD

Single pole models do not have terminals 4, 5, & 6.


OPTIONAL ACCESSORIES

PCB Adaptors

AT701
Single Pole
Straight PC
Terminals

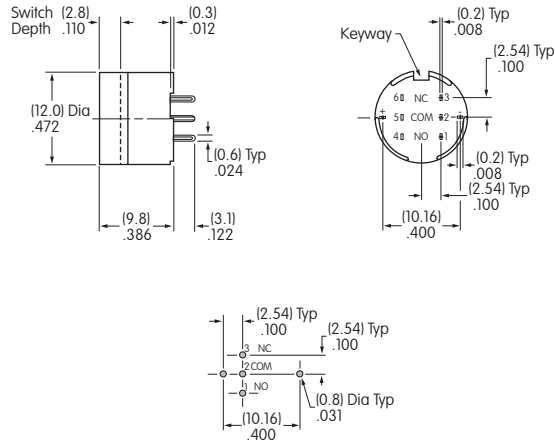

AT702
Double Pole
Straight PC
Terminals


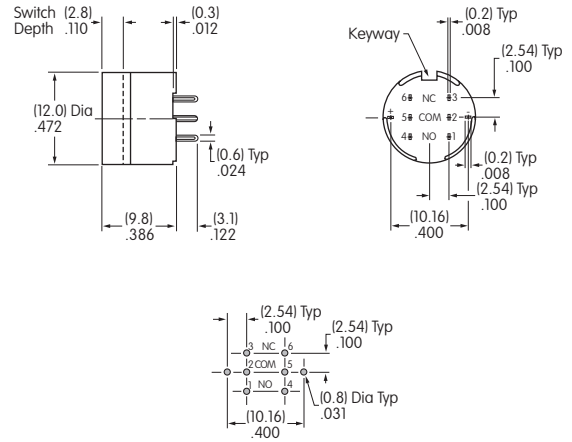


Material: Glass fiber reinforced polyamide Note: Order adaptors separately


Dust Covers

Panel Thickness Range: .020 ~ .268" (0.5 ~ 6.8mm) for Bushing Mounting; .020 ~ .079" (0.5 ~ 2.0mm) for Snap-in Mounting
Dust Covers reduce the depth of switch behind panel by .047" (1.2mm).

AT495
For Square & Round
(not for Barrier type)

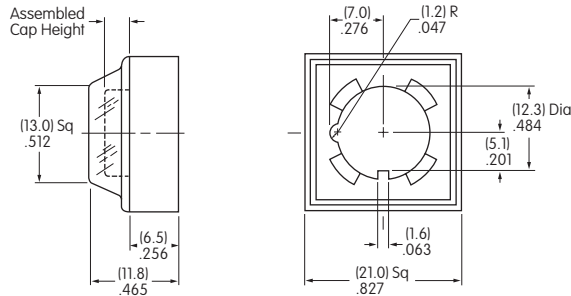

AT4025
For Rectangular
(not for Barrier type)

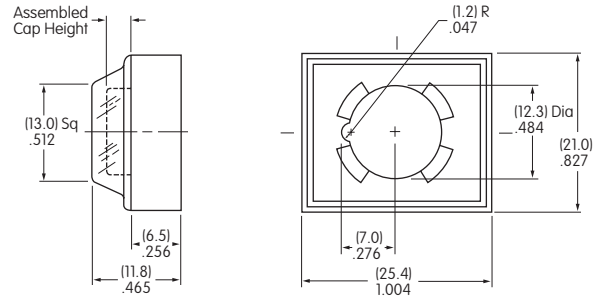

Material: Lid: PVC PVC loses pliability below 0°C (32°F). Base: Polyamide

OPTIONAL ACCESSORIES

Protective Guards

AT494
For Square & Round
(not for Barrier type)



AT4024
For Rectangular
(not for Barrier type)





Panel Thickness
Range:

.020" ~ .268"
(0.5 ~ 6.8mm)
for Bushing Mounting

.020" ~ .091"
(0.5 ~ 2.3mm)
for Snap-in Mounting

Protective Guards reduce
the depth of switch
behind panel by
.047" (1.2mm).

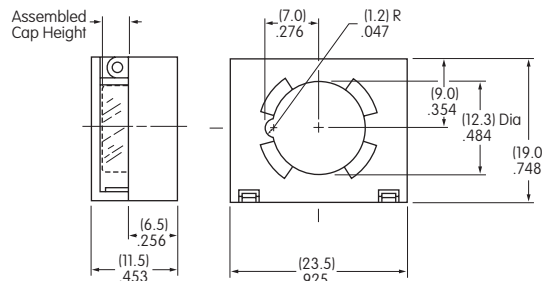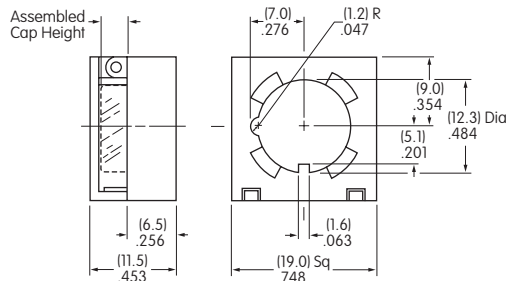


Material: Cover: Polycarbonate

Base: Polyamide

ASSEMBLY INSTRUCTIONS

Cap Removal & Installation

For alternate action models cap must be in UP position for cap removal. Indentations on opposite sides of the cap provide an easy way to lift the cap out of the holder, using either the finger nails, or cap extractor AT109.



LED Polarity & Orientation in Lamp Socket

Super Bright LEDs AT625, AT631, & AT632 are electrostatic sensitive.





LED
AT635



LED
AT634




LEDs
AT625
AT631
AT632

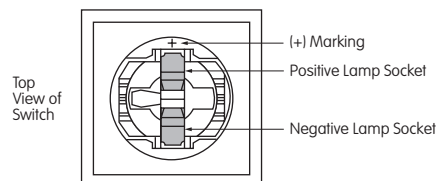

Cap Replacement

Note that the cap has a pair of round tabs and a pair of long tabs which should be used for correctly replacing the cap in its holder. Using the long tabs as guides, slide the cap with the long tabs moving into the slots on opposite sides of the cap holder. Then, the round tabs will snap into notches on the other two sides of the holder.

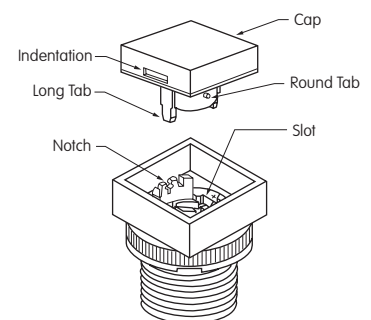

AT108 Socket Wrench
for Bushing Mounting

Overtightening the
mounting nut
may damage the
switch housing.



AT109 Cap Extractor



AT111 Lamping Tool




LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for KB Lens

Recommended Methods: Screen Print or Pad Print on Lens.
Epoxy based ink is recommended.

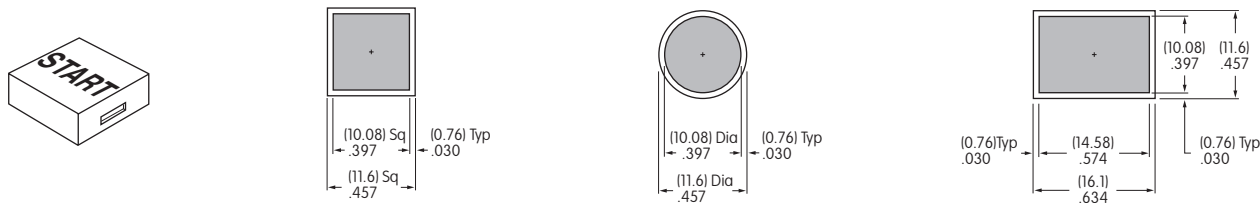


Shaded areas are printable areas.

Suggested Printable Area for Film Insert

Recommended Print Method: Laser Print

Film Insert: Clear Polyester, 4 mil max. thickness

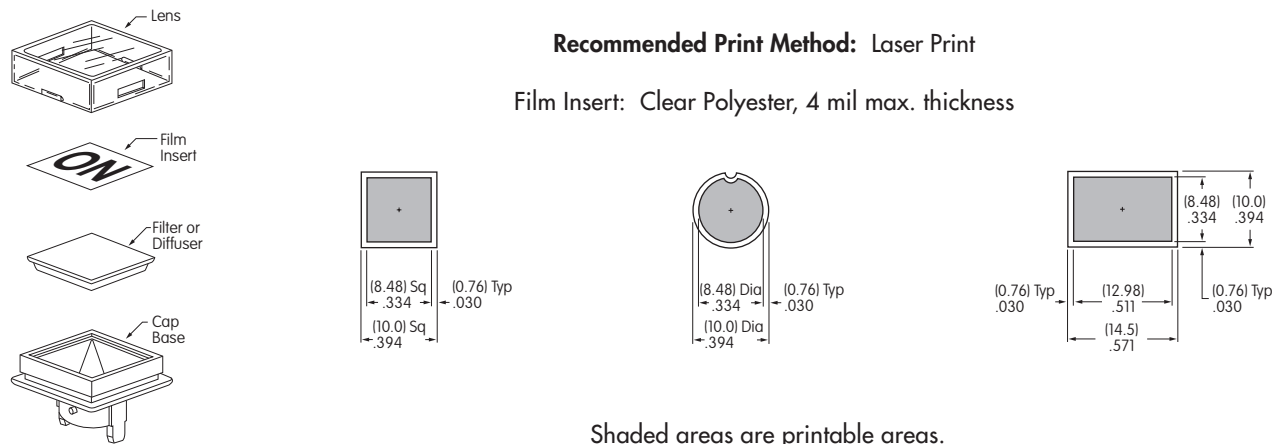

Shaded areas are printable areas.

General Specifications

Electrical Capacity (Resistive Load)

Low Level: 100mA maximum @ 12V DC

Other Ratings

Contact Resistance: 200 milliohms maximum

Insulation Resistance: 100 megohms minimum @ 250V DC

Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum

1,500V AC minimum between contacts & case for 1 minute minimum

Mechanical Life: 5,000,000 operations minimum;

1,000,000 operations minimum for Rectangular Switch/Cap Assembly (at center of cap)

Electrical Life: 5,000,000 operations minimum;

1,000,000 operations minimum for Rectangular Switch/Cap Assembly (at center of cap)

Nominal Operating Force: **KP01:** 1.9N maximum for Tactile & Nontactile models (at center of cap)

KP02: 1.6N maximum for Tactile, Nontactile & Tactile/Audible models (at center of cap)

Travel: **KP01:** Pretravel .122" (3.1mm); Overtravel .055" (1.4mm); Total Travel .177" (4.5mm)

KP02: Pretravel .091" (2.3mm); Overtravel .047" (1.2mm); Total Travel .138" (3.5mm)

Materials & Finishes

Plunger/Upper Housing: Polyacetal

Lower Housing: Glass fiber reinforced PBT (UL94V-0)

Movable Contact: Stainless steel with gold plating

Stationary Contacts: Gold over copper alloy

Switch Terminals: Brass with tin plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F)

Humidity: 90-95% humidity for 240 hours @ 40°C (104°F)

Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours

Shock: 51G (500m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 50.0N maximum downward force on actuator

PCB Processing

Soldering: **For RGBP 4-pin:** Wave Soldering. Preheat temperature: 140°C @ 60 seconds;

Peak temperature: 270°C @ 11 seconds; Cycles: 2

Manual Soldering. 410°C @ 4 seconds; Cycles: 2

For all others: Wave Soldering. Preheat temperature: 110°C @ 40 seconds;

Peak temperature: 270°C @ 6 seconds; Cycles: 2

Manual Soldering. 390°C @ 4 seconds; Cycles: 2

Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards: UL94V-0 lower housing

The KP Series pushbuttons have not been tested for UL recognition or CSA certification.

These switches are designed for use in a low-voltage, low-current, logic-level circuit.

When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

KP series offers a complete switch solution for all control panel needs, including home keys and the rectangular switch/cap assembly.

Distinct, long total travel of .177" (4.5mm) for KP01 or shorter stroke of .138" (3.5mm) for KP02.

Available with super bright amber/blue bicolor LED or super bright RGB LED. The RGB LED provides vibrant full color spectrum in unlimited color combinations, and is offered in both 4-pin or 8-pin terminations.

Unique actuation guide gives positive indication of circuit transfer as well as smooth and silent operation.

Choices of tactile, nontactile or tactile/audible actuation.


Compact design with height of .906" (23.0mm) from PC board to top of cap (same height as programmable SmartDisplay).

Flat, sculptured or home key square caps in three common sizes for design flexibility in various applications.


Twin contacts with gold plating assure high reliability and long life of 5,000,000 operations minimum.

Improved profile for soldering specifications (RGBP models).

Standard and custom alternating legends available.

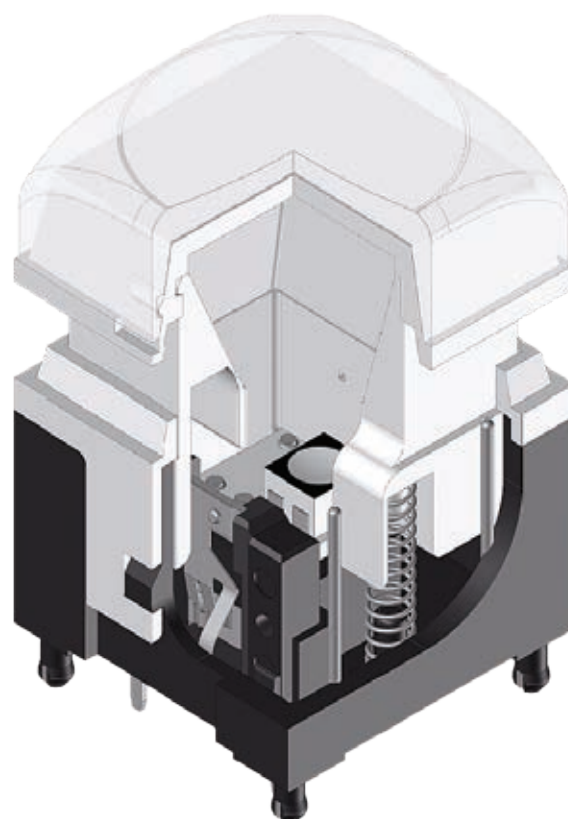

Actual Size

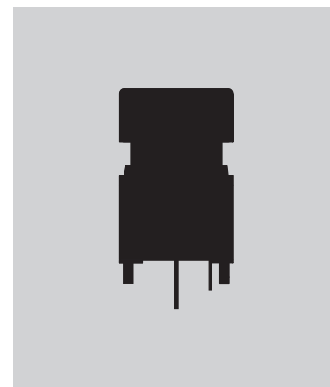

Toggles

Rockers

Pushbuttons

D
Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt


Touch

Indicators

Accessories

Supplement

TYPICAL SWITCH

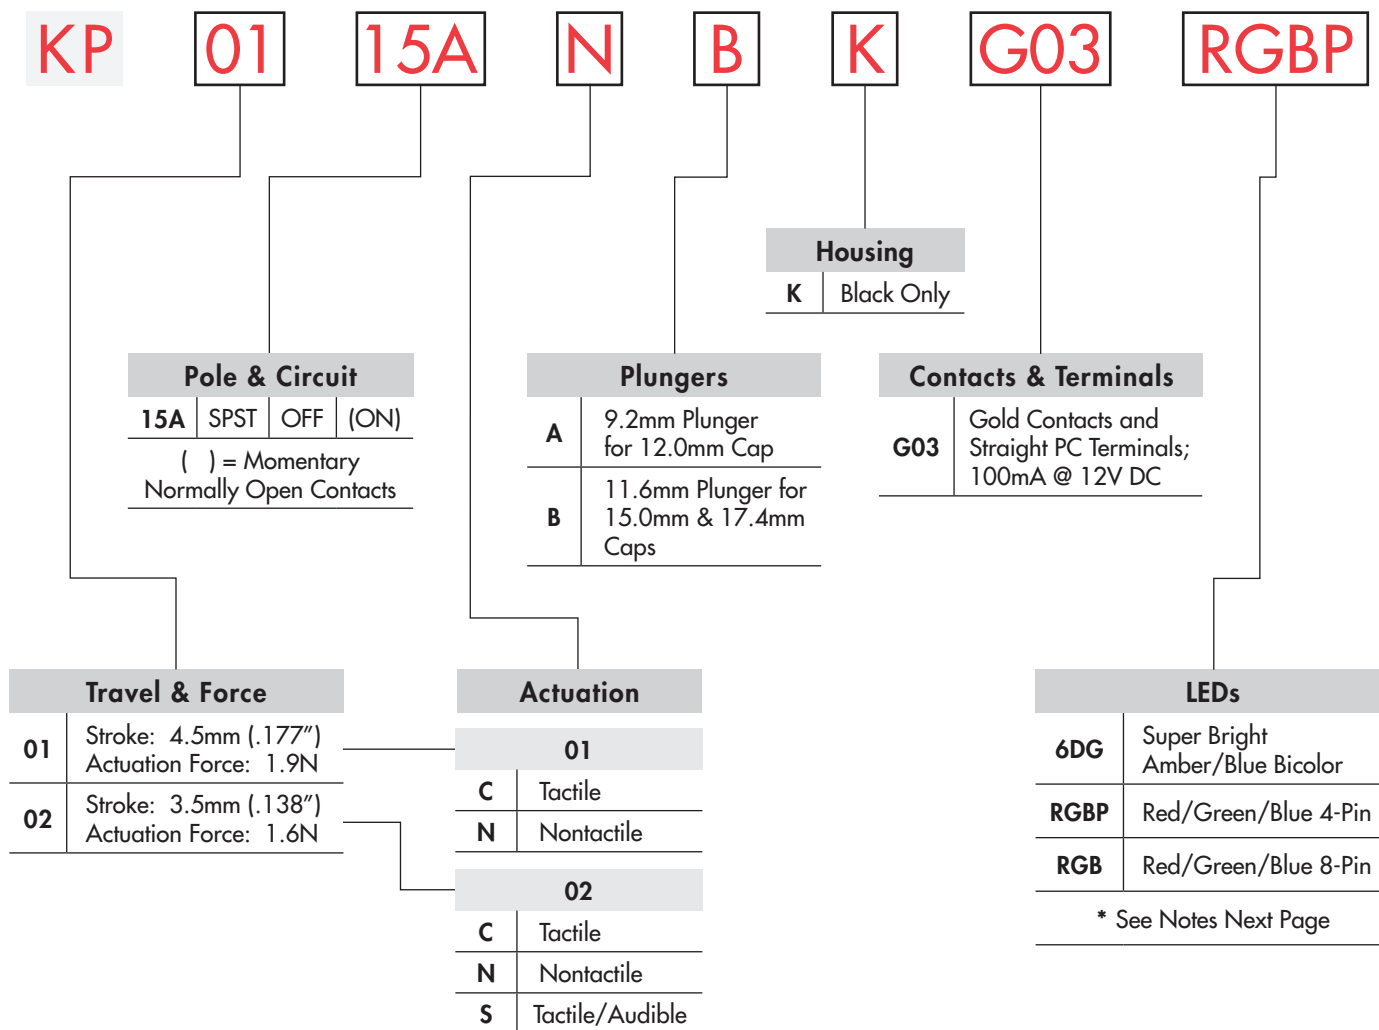


DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

KP0115ANBKG03RGBP-2SJB





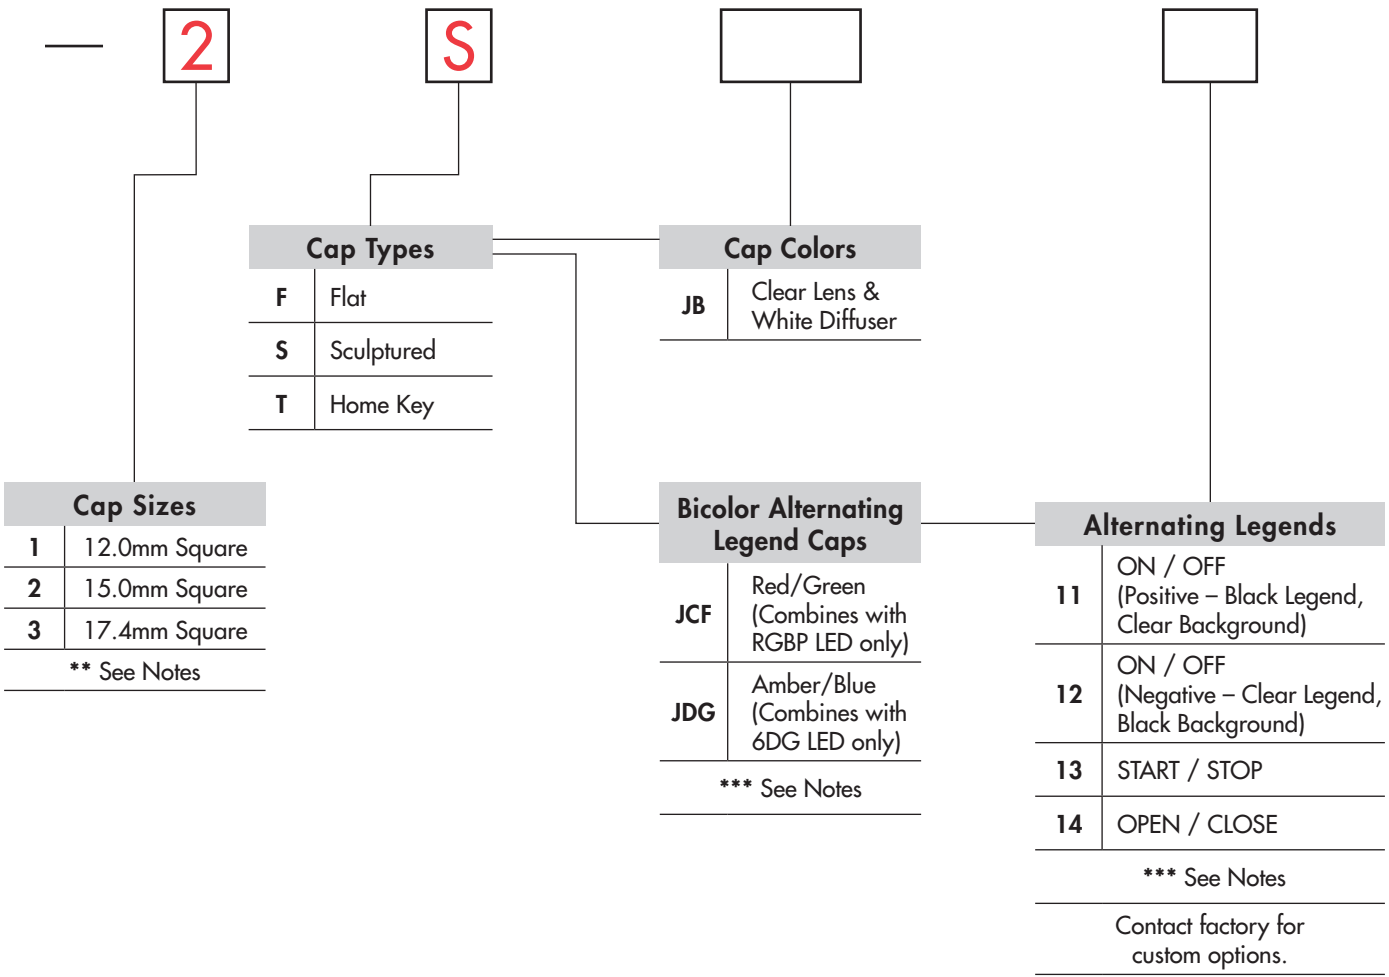


ORDERING EXAMPLE



Notes	Page No.
* Amber/Blue Bicolor	D43
* RGBP LED	D44
* RGB LED (not recommended for new design)	D45
** Rectangular Cap	D46
*** Alternating Legends	D42

POLE & CIRCUIT

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch Schematic
Pole	Model	Normal	Down	Normal	Down	Note: Switch terminals "1" & "1a" are actually marked on the switch. 
SP	KP0115A KP0215A	OFF 	(ON) 	Normally Open 	1-1a 	

ACTUATION



Tactile

KP01 or KP02



Nontactile

KP01 or KP02



Tactile/Audible


KP02 only

PLUNGERS




**9.2mm Plunger
for 12.0mm Cap**

9.2mm Plunger is designed with a narrower neck to hold the 12.0mm Cap.



**11.6mm Plunger
for 15.0mm & 17.4mm Caps**

11.6mm Plunger is designed with a wider neck to hold both the 15.0mm and 17.4mm Caps.



HOUSING



Black Only

CONTACTS, TERMINALS, & RATING



Gold Contacts

Straight PC Terminals


100mA @ 12V DC

CAP TYPES & COLORS


Caps for Bicolor, RGBP & RGB

1 12.0mm Square Used on A Plunger


F AT3083 Flat Cap



S AT3078 Sculptured Cap




T AT3086 Home Key Cap




2 15.0mm Square Used on B Plunger


F AT3084 Flat Cap



S AT3079 Sculptured Cap




T AT3087 Home Key Cap




3 17.4mm Square Used on B Plunger


F AT3085 Flat Cap



S AT3080 Sculptured Cap



T AT3088 Home Key Cap

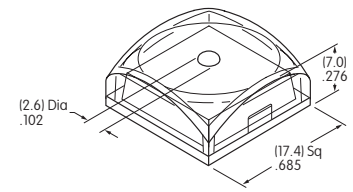


JB Lens & Diffuser Colors Available:

Clear/White

Materials & Finishes: Lens - Polycarbonate with glossy finish

Diffuser - Polycarbonate with textured finish

Optional Protective Guard AT4170 available; contact factory.




Clear Lens

White Diffuser


Caps for Alternating Legends

1 12.0mm Square Used on A Plunger


F AT3093 Flat Cap



S AT3090 Sculptured Cap




T AT3096 Home Key Cap




2 15.0mm Square Used on B Plunger


F AT3094 Flat Cap



S AT3091 Sculptured Cap




T AT3097 Home Key Cap

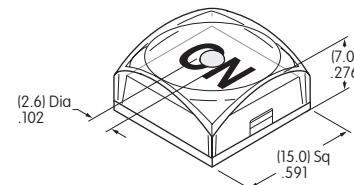


3 17.4mm Square Used on B Plunger


F AT3095 Flat Cap



S AT3092 Sculptured Cap



T AT3098 Home Key Cap

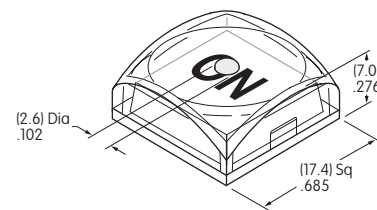

Standard Alternating Legend Pairs



Green/Red or Blue/Amber



Green/Red or Blue/Amber



Green/Red or Blue/Amber



Green/Red or Blue/Amber

Cap illumination is alternating Green/Red or Blue/Amber; legend text is black.
Contact factory for other Alternating Legends.

Legend illustrations are approximate representations of the actual characters on the filters.

Part Numbers for Alternating Legends

Color	Cap Size	Flat Cap	Sculptured Cap	Home Key Cap
		Part Number	Part Number	Part Number
Red/Green	12mm Square	AT3093JCF11 ~ AT3093JCF14	AT3090JCF11 ~ AT3090JCF14	AT3096JCF11 ~ AT3096JCF14
	15mm Square	AT3094JCF11 ~ AT3094JCF14	AT3091JCF11 ~ AT3091JCF14	AT3097JCF11 ~ AT3097JCF14
	17.4mm Square	AT3095JCF11 ~ AT3095JCF14	AT3092JCF11 ~ AT3092JCF14	AT3098JCF11 ~ AT3098JCF14
Amber/Blue	12mm Square	AT3093JDG11 ~ AT3093JDG14	AT3090JDG11 ~ AT3090JDG14	AT3096JDG11 ~ AT3096JDG14
	15mm Square	AT3094JDG11 ~ AT3094JDG14	AT3091JDG11 ~ AT3091JDG14	AT3097JDG11 ~ AT3097JDG14
	17.4mm Square	AT3095JDG11 ~ AT3095JDG14	AT3092JDG11 ~ AT3092JDG14	AT3098JDG11 ~ AT3098JDG14

See Ordering Table for Alternating Legend that corresponds with last 2 digits of part number.

SUPER BRIGHT BICOLOR LED SPECIFICATIONS




The electrical specifications shown are determined at a basic temperature of 25°C.

LEDs are an integral part of the switch and are not available separately.

LED circuit is isolated and requires an external power source.

If the source voltage exceeds the rated voltage, a ballast resistor is required.

The resistor value can be calculated by using the formula in the Supplement Section.



Colors

6DG

Amber

Blue


Unit

Minimum Luminous Intensity	I_V	204	113	mcd
Standard Luminous Intensity	I_V	340	188	mcd
Maximum Forward Current	I_{FM}	30	25	mA
Typical Forward Current	I_F	20	20	mA
Forward Voltage	V_F	2.1	3.2	V
Power Peak Dissipation	P_D	75	100	mW
Maximum Reverse Voltage	V_{RM}	4	4	V
Wavelength at Peak Emission	λ	583 ~ 595	464 ~ 476	nm
Current Reduction Rate Above 25°C	ΔI_F	0.40	0.33	mA/°C
Ambient Temperature Range		-25 ~ +50		°C

Purple can be achieved by simultaneous illumination of Amber & Blue.


TYPICAL SWITCH DIMENSIONS

12.0mm Square Cap

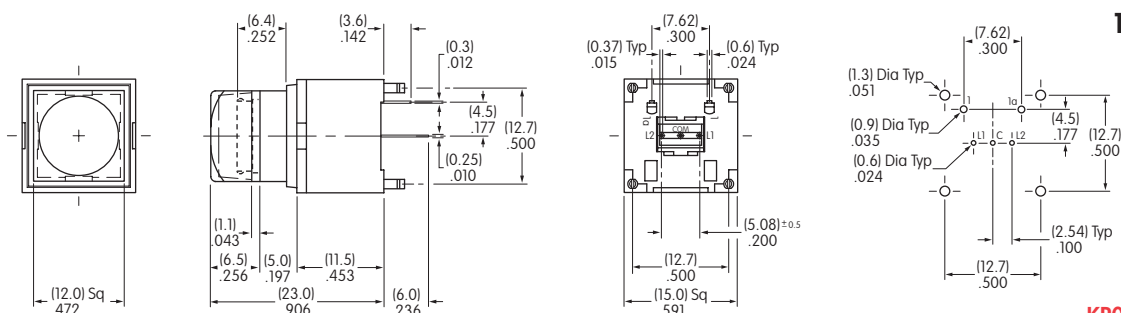

KP0115ACAKG036DG-1SJB


15.0mm Cap 17.4mm Cap

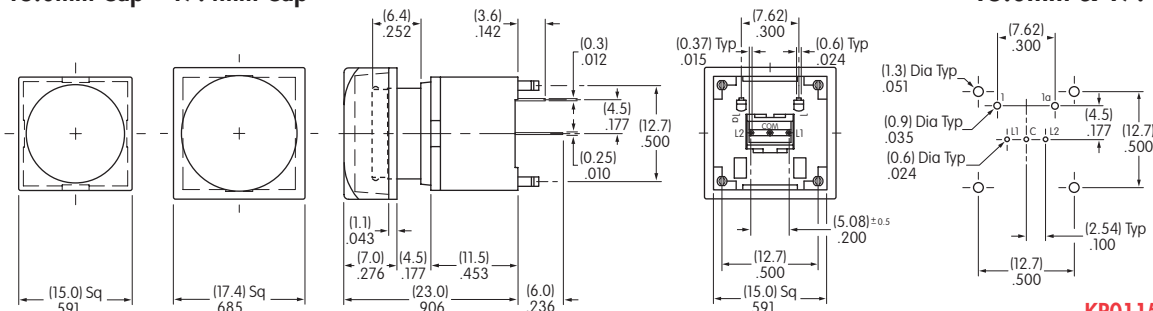

KP0115ANBKG036DG-3SJB

15.0mm & 17.4mm Square Caps

Bicolor Alternating Legend • 15.0mm Square Cap

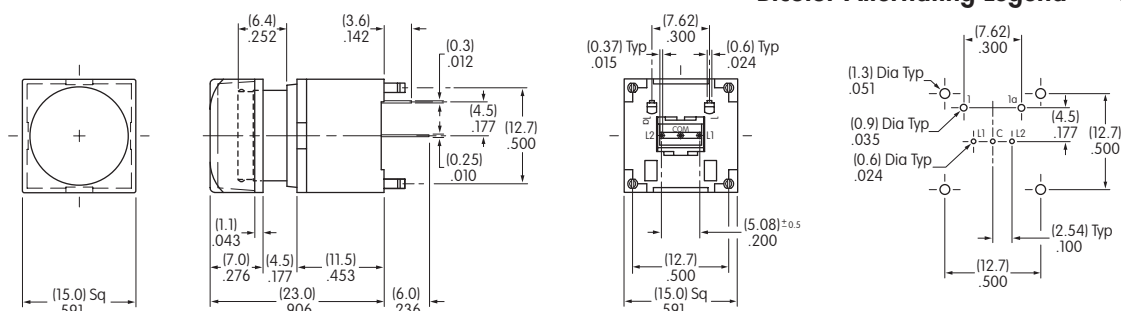

KP0115ANBKG036DG-2SJDG

LED SPECIFICATIONS • RGBP with 4 Pins

The electrical specifications shown are determined at a basic temperature of 25°C.


LEDs are an integral part of the switch and are not available separately.

LED circuit is isolated and requires an external power source.

If the source voltage exceeds the rated voltage, a ballast resistor is required.

The resistor value can be calculated by using the formula in the Supplement Section.

Note: For applications that require white illumination, contact factory.



RGBP




	Color	Red	Green	Blue	Unit
Maximum Forward Current	I_{FM}	50	30	30	mA
Typical Forward Current	I_F	15	16	10	mA
*Forward Voltage	V_F	2.0	2.9	2.9	V
Power Peak Dissipation	P_D	100	80	80	mW
Maximum Reverse Voltage	V_{RM}	5	5	5	V
Dominant Wavelength	λ_d	620	525	467	nm
Current Reduction Rate Above 25°C	Δ_{IF}	0.75	0.25	**0.22	mA/°C
Ambient Temperature Range		-25 ~ +50			°C

*Forward Voltage (V_F) and Dominant Wavelength (λ_d) are Typical Value measured by Typical Forward Current (I_F).


**Current Reduction Rate (Δ_{IF}) Above 40°C

TYPICAL SWITCH DIMENSIONS

12.0mm Square Cap with RGBP LED

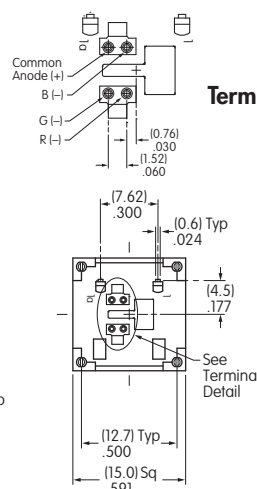


Terminal Detail





KP0115ACAKG03RGBP-1SJB


15.0mm & 17.4mm Square Caps with RGBP LEDs




15.0mm Cap

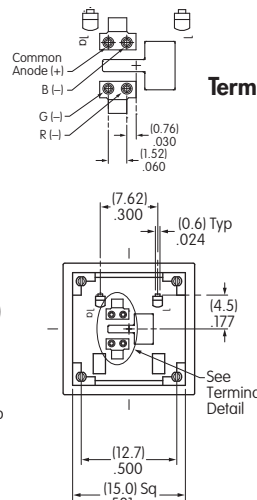

Terminal Detail



KP0115ANBKG03RGBP-2SJB



17.4mm Cap

Terminal Detail

KP0115ANBKG03RGBP-3SJB

LED SPECIFICATIONS • RGB with 8 Pins

The electrical specifications shown are determined at a basic temperature of 25°C.


LEDs are an integral part of the switch and are not available separately.

LED circuit is isolated and requires an external power source.

If the source voltage exceeds the rated voltage, a ballast resistor is required.



The resistor value can be calculated by using the formula in the Supplement Section.

Note: For applications that require white illumination, contact factory.

		RGB			
	Color	Red	Green	Blue	Unit
Maximum Forward Current	I_{FM}	30	30	30	mA
Typical Forward Current	I_F	20	14	9	mA
*Forward Voltage	V_F	2.0	2.9	2.9	V
Power Peak Dissipation	P_D	60	80	80	mW
Maximum Reverse Voltage	V_{RM}	5	5	5	V
Dominant Wavelength	λ_d	621.5	522.5	472.5	nm
Current Reduction Rate Above 25°C	Δ_{IF}	0.50	0.50	0.50	mA/°C
Ambient Temperature Range		-25 ~ +50			°C


*Forward Voltage (V_F) and Dominant Wavelength (λ_d) are Typical Value measured by Typical Forward Current (I_F).

TYPICAL SWITCH DIMENSIONS

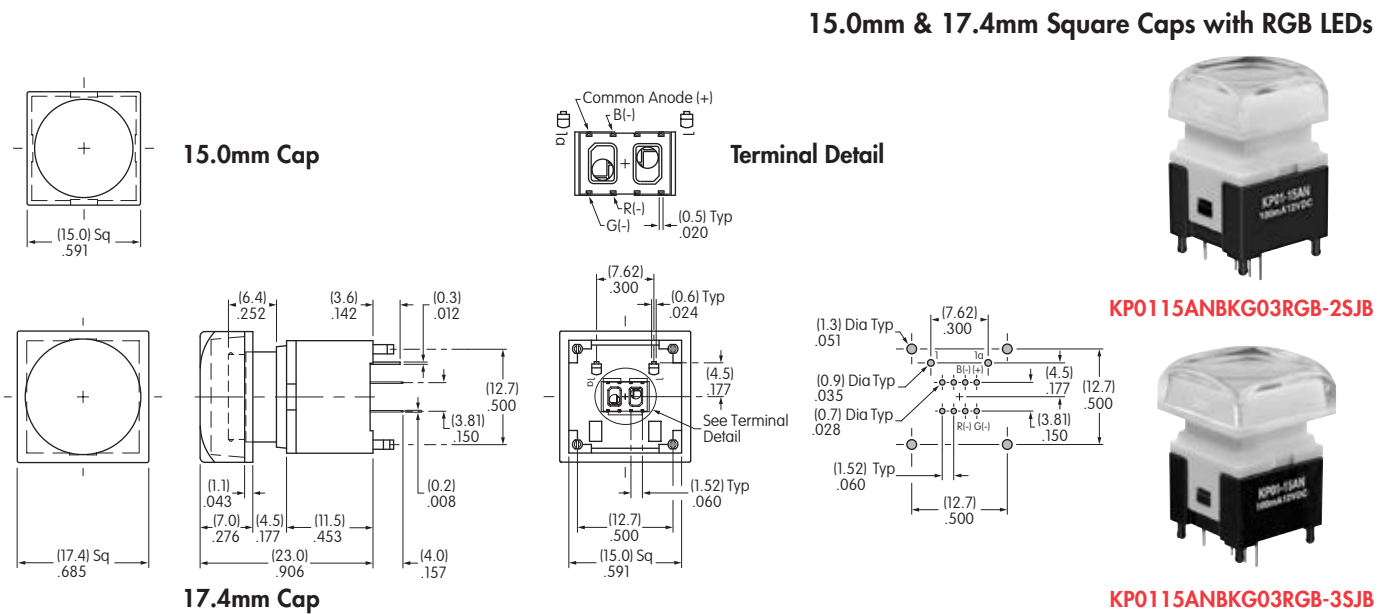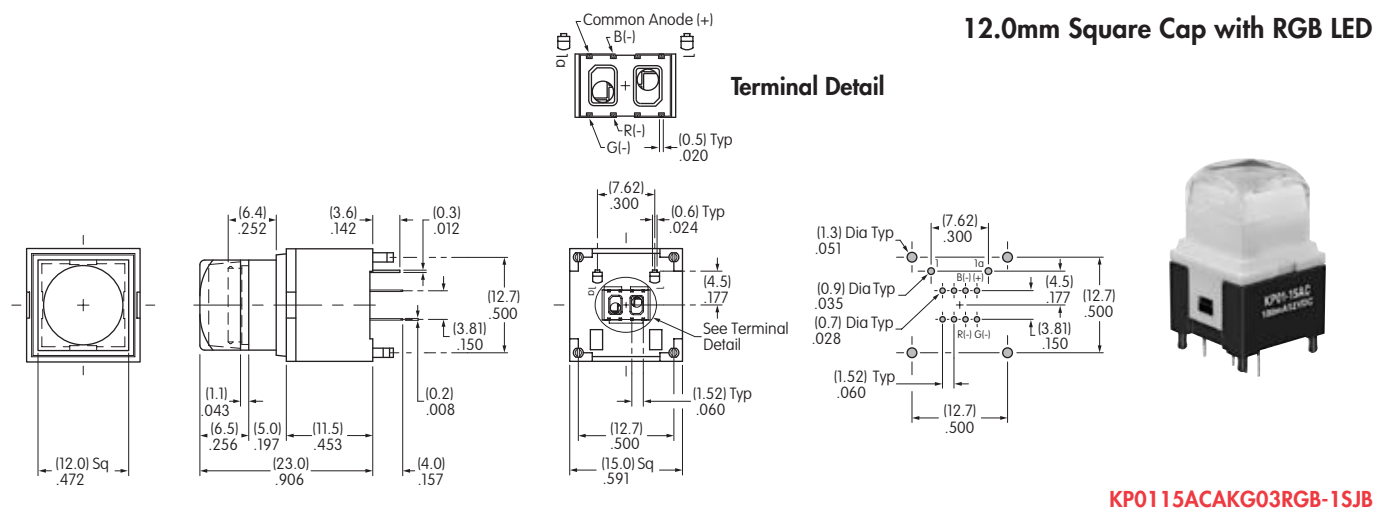

RECTANGULAR CAP ASSEMBLY CAP ASSEMBLY DIMENSIONS

Switch/Rectangular Cap Assembly

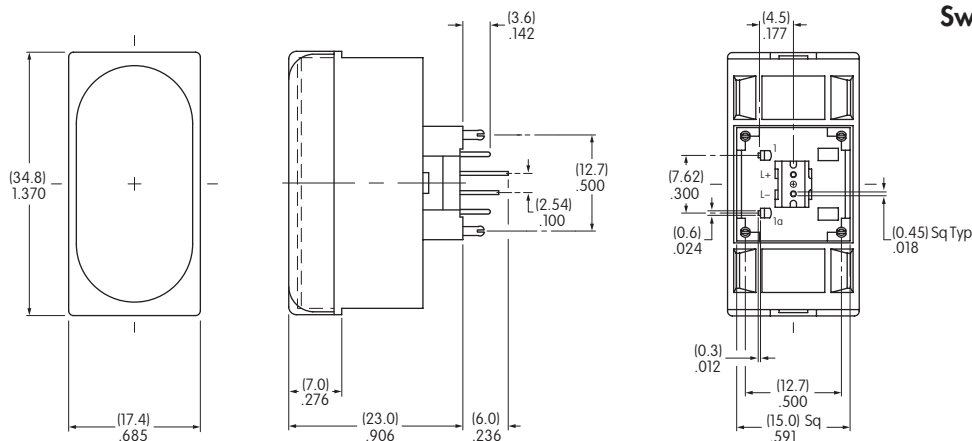

KP0115ACBKG03CJB for Tactile
KP0115ANBKG03CJB for Nontactile

See below for complete assembly of switch, LEDs and LED holders.

LED SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. Center LED is an integral part of the switch. LEDs are not sold separately. LED circuits are isolated and require an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement Section.

	Color	Red	Unit
Maximum Forward Current	I_{FM}	30	mA
Typical Forward Current	I_F	20	mA
Forward Voltage	V_F	2.0	V
Maximum Reverse Voltage	V_{RM}	4	V
Dominant Wavelength	λ_d	623	nm
Current Reduction Rate Above 25°C	ΔI_F	0.32	mA/°C
Ambient Temperature Range		-25 ~ +50	°C


Contact factory for other LED colors.

ASSEMBLY & INSTALLATION INSTRUCTIONS



Switch/Rectangular Cap assembly has 3 LEDs to achieve bright and even illumination.

One LED (in center of switch bottom) is an integral part of the switch; the other 2 LEDs and 2 LED Holders are packaged separately.

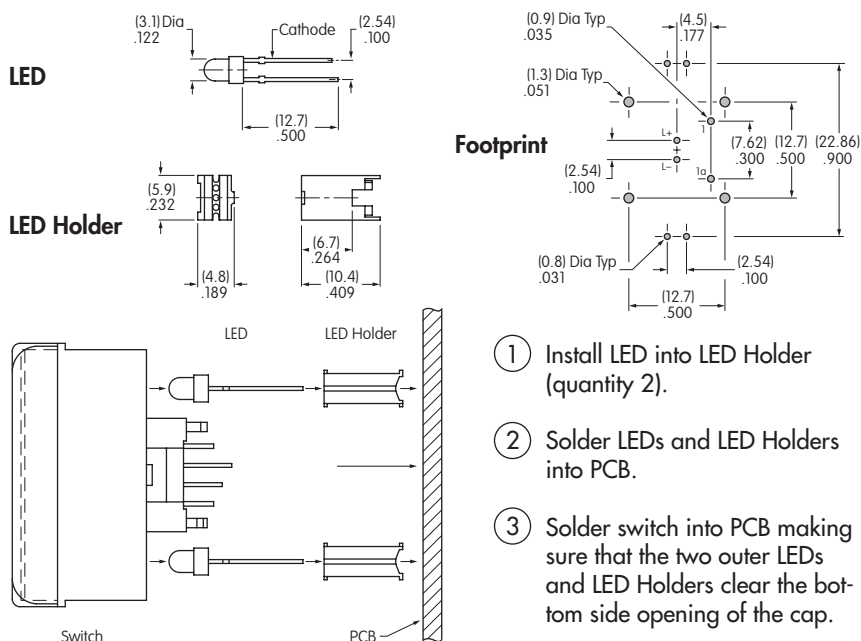


ASSEMBLY INSTRUCTIONS FOR SQUARE CAPS



Cap Orientation

As shown in the accompanying illustration, the cap and plunger are designed with tabs and notches to assure proper orientation of the cap on the switch.




Removal of Cap Assembly & Separation of Lens & Diffuser

Holding the switch tightly, pull the cap off the switch. Once the cap assembly is released from the plunger, the lens and diffuser can be separated. Pry up the lens with fingernail or flat tip screwdriver inserted at the step on the diffuser.

Installation or Replacement of Cap

After aligning notches with tabs, join the lens and diffuser. Hold the switch tightly without touching the terminals. Firmly press the cap onto the plunger by applying pressure from one side to the other until both are snapped together.



LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Areas for KP Lens

Recommended Methods:


Laser Etch on clear lens, Screen Print, or Pad Print on lens.
Laser Print on film insert.
Epoxy based ink is recommended.

Shaded areas are suggested printable areas for Lens.




Printing on Diffuser is not advisable.


Rectangular Cap Lens

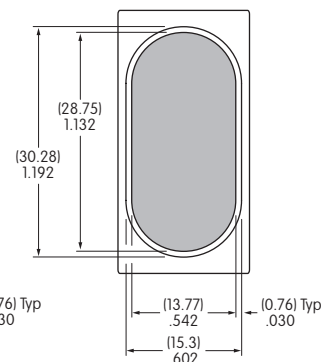

Flat Cap Lens

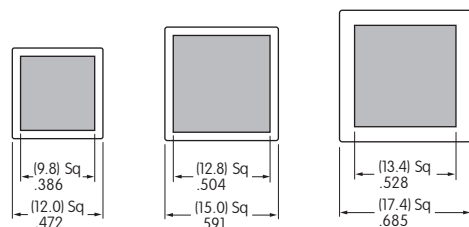


Sculptured Cap Lens

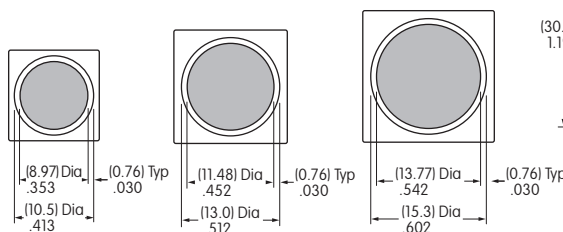


Suggested Printable Areas for KP Film Insert

Shaded areas are suggested printable areas for Film Insert.


Rectangular Film Insert

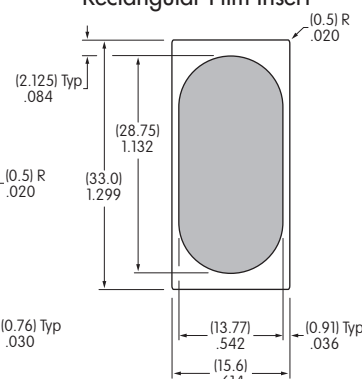

Flat Cap Film Inserts

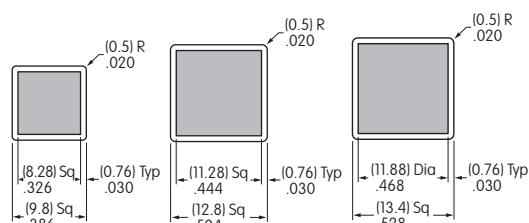

Sculptured or Home Key Cap Film Inserts

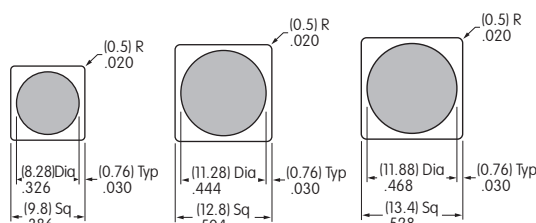

Film Insert Material and Thickness: Clear Polyester; 4 mil (100μ) maximum thickness

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary circuit
 200,000 operations minimum for maintained circuit
Electrical Life: 100,000 operations minimum
Nominal Operating Force: 4.41N
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing: Glass fiber reinforced polyamide (UL94V-0)
Snap-in Frame: Stainless steel
Movable Contact: Silver alloy or copper with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Base: Liquid crystal polymer (UL94V-0)
Switch Terminals: Phosphor bronze with silver or gold plating
Lamp Terminals: Brass with silver plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
 Note: When used with a polyvinyl chloride splash cover, the lowest limit is 0°C (32°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing: Not available for snap-in; see next section for panel seal.

Installation

Cap Installation Force: 3.92N maximum downward force on cap
Quick Connect Force: 52.95N maximum downward force on connector
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing & base
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.
 All models recognized at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.
CSA: **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
 Add "/C" before first dash in part number to order CSA certified switch.
 All models certified at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.

Distinctive Characteristics

Carefully designed light diffusion and filtering system produces bright, full surface illumination with front panel relamping.

Spot illumination available in single and bicolor LEDs.

Choice of super bright LEDs in white, green, and blue in addition to standard or bright red, amber, and green LEDs.

Stainless steel clips provide secure mounting with a wide range of panel thicknesses.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.


Snap-action contact mechanism gives long electrical life and sensitivity of actuation.

Combination solder lug and .110" quick connect terminals are epoxy sealed to prevent entry of flux, dust, and other contaminants.



Panel sealed model meets IP65 of IEC60529 specifications (similar to NEMA 4 & 13).

Compact switch design minimizes behind panel depth.


Matching indicators available.

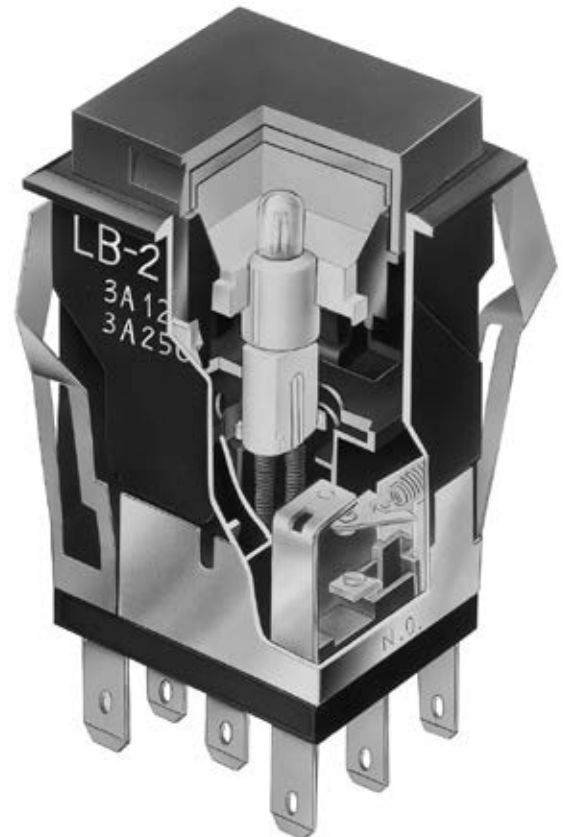

Actual Size

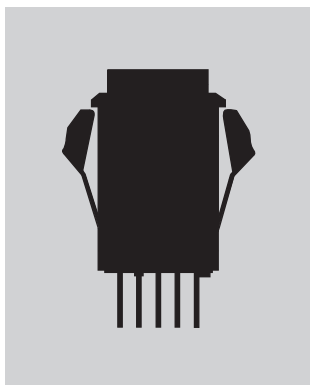


Snap-in Mount Page D48



Panel Seal Page D59

TYPICAL SWITCH

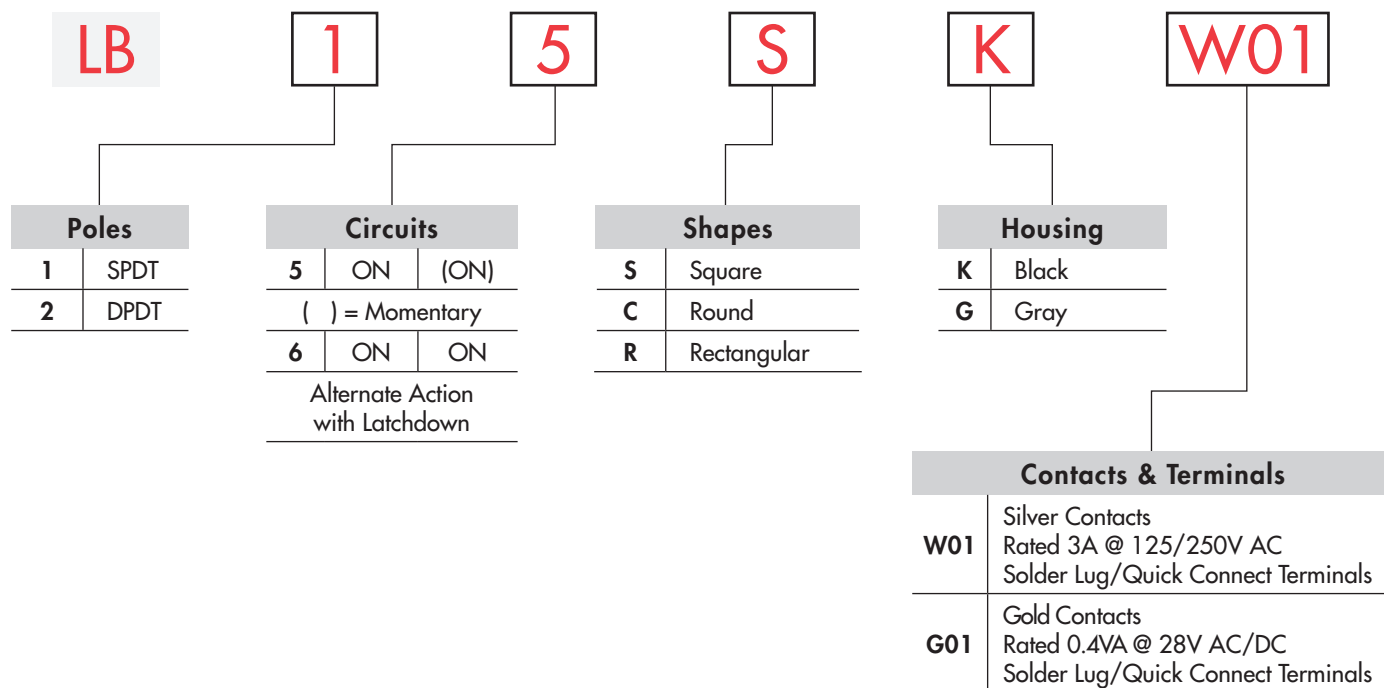


IMPORTANT:



Switches are supplied without UL, cULus and CSA marking unless specified.
UL, cULus & CSA recognized only when ordered with marking on the switch.
 Specific models, ratings, and ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

LB15SKW01-5C12-JC

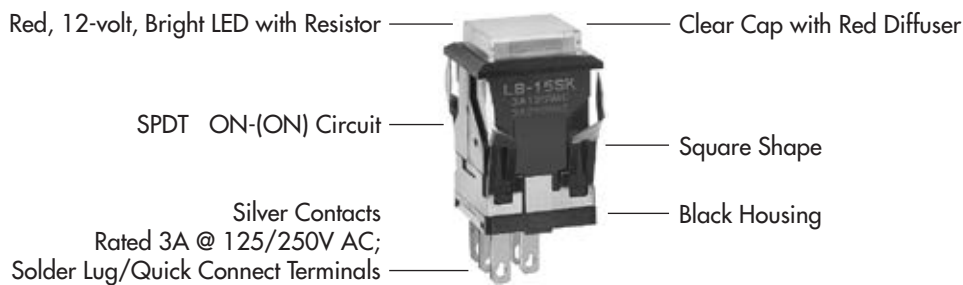

ORDERING EXAMPLE

5C 12

Lamps

Incandescent Lamp Used with Solid Cap

05	5-volt
12	12-volt
No Code	Nonilluminated

Incandescent or Neon Used with Insert Cap

01	110-volt Neon
05	5-volt Incandescent
12	12-volt Incandescent
No Code	Nonilluminated

Bright LED Used with LED Cap

Colors		Resistor	
5C	Red	No Code	No Resistor
5D	Amber	05	5-volt
		12	12-volt
5F	Green	24	24-volt

Super Bright LED Used with LED Cap

6B	White
6F	Green
6G	Blue

LED in Spot Illuminated Cap

1C	Red Single Color
1D	Amber Single Color
1F	Green Single Color
CF	Red/Green Bicolor

Nonilluminated

No Code	Nonilluminated
---------	----------------

JC

Cap Types & Colors

Solid Cap: Lens/Filter Colors

BJ	White/Clear
CJ	Red/Clear
EJ	Yellow/Clear
FJ	Green/Clear
GJ	Blue/Clear

Insert Cap: Lens/Filter Colors

JB	Clear/White
JC	Clear/Red
JE	Clear/Yellow
*JF	Clear/Green
*JG	Clear/Blue

*JF & JG not suitable with neon.

LED Cap: Lens/Diffuser Colors

JB	Clear/White
JC	Clear/Red
JD	Clear/Amber
JF	Clear/Green

LED Cap: Lens/Diffuser Colors

JB	Clear/White
----	-------------

Spot Illuminated Cap Colors

A	Black	Available in Square and Round only.
B	White	
C	Red	
F	Green	

Nonilluminated Cap Colors

A	Black	F	Green
B	White	G	Blue
C	Red	H	Gray
E	Yellow		


POLES & CIRCUITS

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
Pole	Model	Normal	Down	Normal	Down	Notes: Switch is marked with NC, NO, COM, L+, L-. Lamp circuit is isolated and requires an external power source.
SP	LB15 *LB16	ON ON	(ON) ON	1-3	1-2	SPDT
DP	LB25 *LB26	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT

* When in latchdown position for the alternate circuit, cap position is .039" (1.0mm) above the built-in bezel.


SHAPES & PANEL CUTOUTS

S .622" (15.8mm)
Square

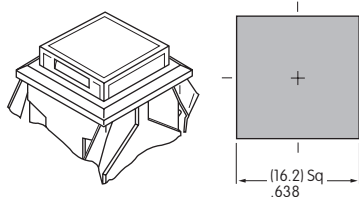


Cutout for 1 switch:
.638" x .638" (16.2mm x 16.2mm)
Cutout for 1 switch with barriers:
.638" x .815" (16.2mm x 20.7mm)

C .854" (21.7mm)
Round

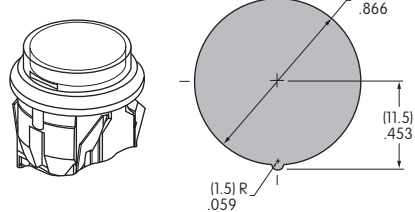

R .622" x .866" (15.8mm x 22.0mm)
Rectangular

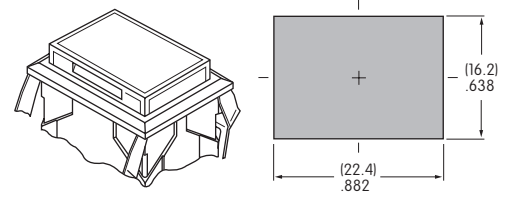

Cutout for 1 switch:
.638" x .882" (16.2mm x 22.4mm)
Cutout for 1 switch with barriers:
.638" x 1.059" (16.2mm x 26.9mm)

Panel Thickness for Switches & Barriers: .039" ~ .157" (1.0 ~ 4.0mm)
Panel Thickness for Protective Guards & Splash Covers: .039" ~ .138" (1.0 ~ 3.5mm)

HOUSING

Housing Colors Available:

K Black

G Gray

CONTACT MATERIALS, RATINGS & TERMINALS

W01

Silver Contacts

Power Level
3A @ 125V AC & 250V AC

G01


Gold Contacts

Logic Level
0.4VA max. @ 28V AC/DC max.

Complete explanation of operating range in Supplement section.

Solder Lug/Quick Connect

Optional PCB adaptors
AT711 & AT712 available;
illustrated in "Optional
Accessories" immediately following
"Typical Switch Dimensions."



INCANDESCENT & NEON LAMP CODES & SPECIFICATIONS

AT607 & AT607N



T-1 Bi-pin

AT607 Incandescent 5-volt or 12-volt; AT607N Neon 110-volt

05

12

01 *

Voltage	V	5V AC	12V AC	110V AC
Current	I	115mA	60mA	1.5mA
Endurance	Avg. Hours	10,000	10,000	
Ambient Temp. Range		-25°C ~ +50°C		

The electrical specifications shown are determined at a basic temperature of 25°C. Lamp circuit is isolated and requires external power source.


* Recommended Resistors for Neon:
33K ohms for 110V AC;
100K ohms for 220V AC

CAP TYPES & COLOR COMBINATIONS


Color Codes: B White C Red D Amber E Yellow F Green G Blue J Clear

Solid Cap for Incandescent Lamp & Nonilluminated


Lens/Filter
Colors Available:





AT476
Square



AT4012
Round



AT4026
Rectangular

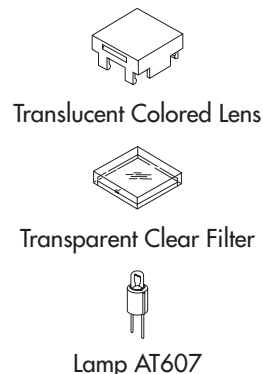


Material: Polycarbonate Finish: Glossy


Lamp AT607

Insert Cap for Incandescent or Neon Lamp & Nonilluminated


Lens/Filter
Colors Available:





AT477
Square



AT4013
Round



AT4027
Rectangular



JF and JG not suitable with neon lamp.

Material: Polycarbonate Finish: Glossy


Lamp AT607 or 607N

Cap for Bright LED without Resistor


Lens/Diffuser
Colors Available:





AT4176
Square



AT4178
Round



AT4177
Rectangular

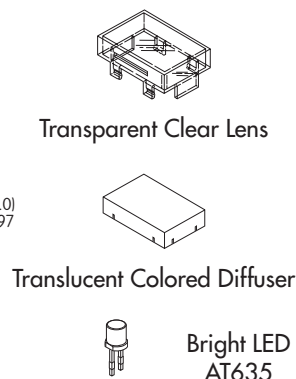

Material: Polycarbonate Finish: Glossy


Bright LED AT635

Cap for Bright LED with Resistor


Lens/Diffuser
Colors Available:





AT4162
Square



AT4164
Round



AT4163
Rectangular

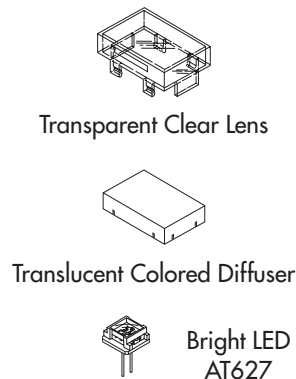

Material: Polycarbonate Finish: Glossy

Bright LED AT627

CAP TYPES & COLOR COMBINATIONS

Color Codes: A Black B White C Red D Amber E Yellow F Green G Blue H Gray J Clear

Cap for Super Bright LEDs


JB

Clear Lens
White Diffuser

AT4129
Square





AT4128
Round

AT4130
Rectangular



Transparent
Clear Lens

Material:
Polycarbonate
Finish: Glossy



Translucent
White Diffuser



LEDs AT625
AT631 AT632


Spot Illuminated Cap with LED

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. Single color LEDs are colored in OFF state; bicolor LEDs are translucent white in OFF state. Polarity marks are on the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section. Additional lamp detail is shown in the Accessories & Hardware section.

LED Specifications


	Single Color LED with 1 Element	Bicolor LED with 2 Elements	Single Color			Bicolor
			1C Red	1D Amber	1F Green	CF Red/Green
LED factory assembled in Spot Illuminated Caps						
	Maximum Forward Current	I_{FM}	25mA	30mA	25mA	30/25mA
	Typical Forward Current	I_F	20mA	20mA	20mA	20mA
Not Available Separately	Forward Voltage	V_F	2.25V	2.1V	2.2V	2.0/2.2V
	Maximum Reverse Voltage	V_{RM}	5V	5V	5V	—
	Current Reduction Rate Above 25°C	ΔI_F	0.33mA/°C	0.40mA/°C	0.33mA/°C	0.43/0.38mA/°C
	Ambient Temperature Range		-25° ~ +70°C			

Cap Colors
Available:





Material:
Polycarbonate
Finish: Glossy

AT480
Square



AT4016
Round



Cap with Window




Factory Assembled LED;
Not Available Separately


When ordering spot illuminated cap separately, LED color must be specified.
Examples: AT480CA (red LED, black cap); AT4016CFB (red/green bicolored LED, white cap)

Cap for Nonilluminated


Cap Colors
Available:





AT484
Square



AT4017
Round



AT4030
Rectangular






Cap
No Lamp

Material: Polycarbonate Finish: Glossy

TYPICAL SWITCH DIMENSIONS

Square

Single & Double Pole


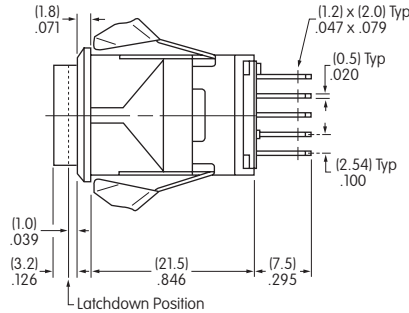



LB15SKW01-12-CJ

Single pole models do not have terminals 4, 5, & 6.

Round

Single & Double Pole

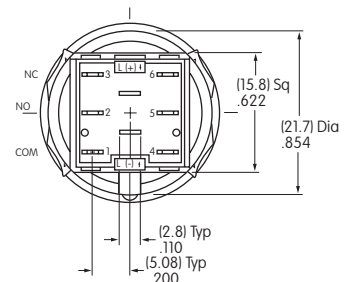
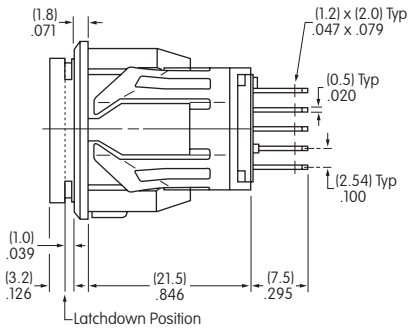



LB16CKW01-12-CJ

Single pole models do not have terminals 4, 5, & 6.

Rectangular

Single & Double Pole

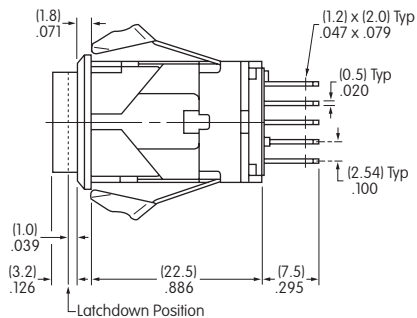

LB26RGW01-12-CJ





Single pole models do not have terminals 4, 5, & 6.

OPTIONAL ACCESSORIES

PCB Adaptors

AT711 Single Pole • Straight PC Terminals

AT712 Double Pole • Straight PC Terminals

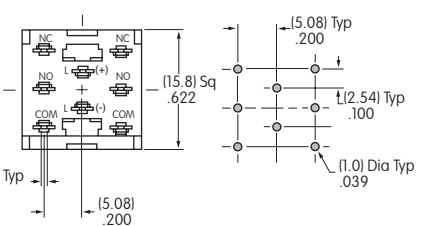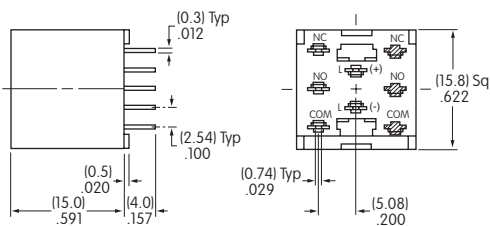


Note: Order adaptors separately.

OPTIONAL ACCESSORIES


Barriers

AT497
End


AT498
Center



Material: Polyamide

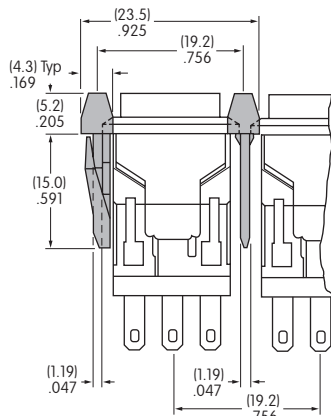

Cutouts for More Than 1 Switch



Square

$$A = .752" (19.1\text{mm}) \times \text{Number of Switches} + .051" (1.3\text{mm})$$




Rectangular

$$A = .996" (25.3\text{mm}) \times \text{Number of Switches} + .051" (1.3\text{mm})$$

Protective Guard

AT499
Square
Protective Guard

Opens 90°
Closes manually







Material: Polyamide

Protective Guards reduce depth of switch behind panel by .020" (0.5mm).

Spring Loaded Protective Guard

AT4171
Square
Protective Guard


Opens 180°
Closes automatically

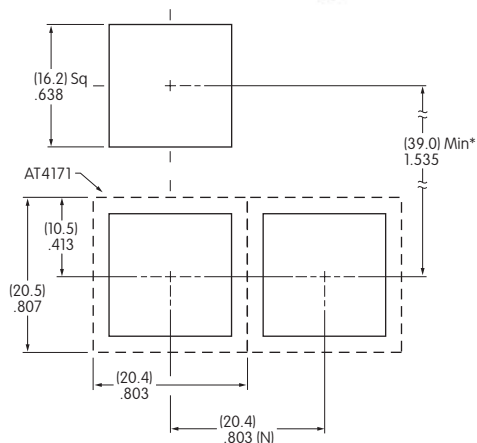

(N) = Number of switches * Minimum dimension allows opening of cover to 180°

Materials:

Cover: Clear Polycarbonate
Base: Black GFR Polyamide
Coil Spring: Stainless Steel



Recommended Panel Thickness:
.039" ~ .106" (1.0mm ~ 2.7mm)


OPTIONAL ACCESSORIES

AT4057 Rectangular Protective Guard

Opens 90°
Closes manually



Protective Guard

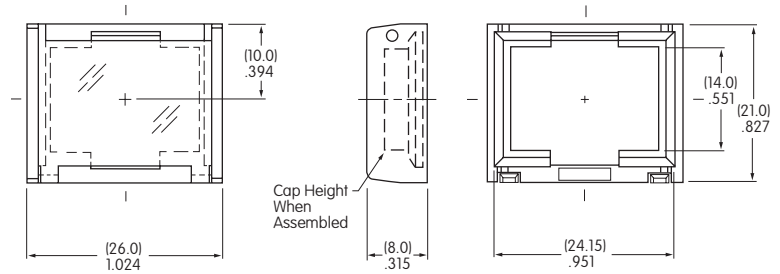


Material: Polyamide

Protective Guards reduce depth of switch behind panel by .020" (0.5mm).

AT4172 Rectangular Protective Guard



Spring Loaded Protective Guard

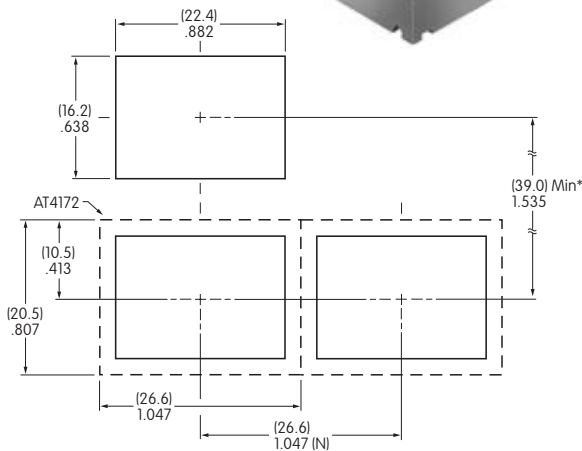


(N) = Number of switches * Minimum dimension allows opening of cover to 180°

Opens 180°
Closes automatically

Materials:

Cover: Clear Polycarbonate
Base: Black GFR Polyamide
Coil Spring: Stainless Steel

Recommended Panel Thickness:
.039" ~ .106" (1.0mm ~ 2.7mm)




Dust Covers






AT4002 Round



AT4001 Square



AT4011 Rectangular

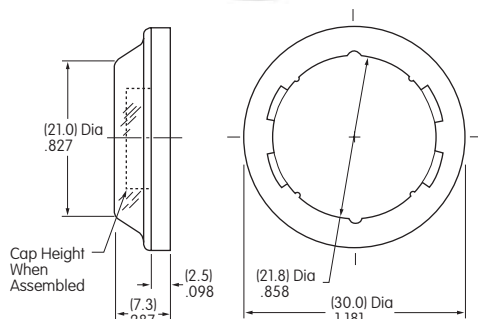

Materials: PVC with polyethylene gasket; PVC loses pliability below 0°C (32°F). Dust Covers reduce depth of switch behind panel by .020" (0.5mm).

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver):	3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
Logic Level (gold):	0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance:	50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance:	200 megohms minimum @ 500V DC
Dielectric Strength:	1,000V AC minimum between contacts for 1 minute minimum; 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life:	1,000,000 operations minimum for momentary circuit 200,000 operations minimum for maintained circuit
Electrical Life:	100,000 operations minimum
Nominal Operating Force:	5.39N
Contact Timing:	Nonshorting (break-before-make)
Travel:	Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing:	Glass fiber reinforced polyamide (UL94V-0)
O-ring:	Nitrile butadiene rubber
Inner Seal:	Silicone rubber
Movable Contact:	Silver alloy or copper with gold plating
Stationary Contacts:	Silver alloy or copper with gold plating
Base:	Liquid crystal polymer (UL94V-0)
Switch Terminals:	Phosphor bronze with silver or gold plating
Lamp Terminals:	Brass with silver plating

Environmental Data

Operating Temperature Range:	-25°C through +50°C (-13°F through +122°F) for Illuminated -25°C through +70°C (-13°F through +158°F) for Nonilluminated Note: When used with a polyvinyl chloride splash cover, the lowest limit is 0°C (32°F)
Humidity:	90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration:	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50G (490m/s ²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing:	IP65 of IEC60529 standard (similar to NEMA 4 & 13)


Installation

Mounting Torque:	1.96Nm (17.35 lb•in) maximum
Cap Installation Force:	3.92N maximum downward force on cap
Quick Connect Force:	52.95N maximum downward force on connector
Soldering Time & Temperature:	Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards:	UL94V-0 housing & base
UL:	File No. E44145 - Recognized only when ordered with marking on switch. Add "/U" or "/CUL" before first dash in part number to order UL recognized switch. All models recognized at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.
CSA:	File No. 023535_0_000 - Certified only when ordered with marking on switch. Add "/C" before first dash in part number to order CSA certified switch. All models certified at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.

TYPICAL SWITCH

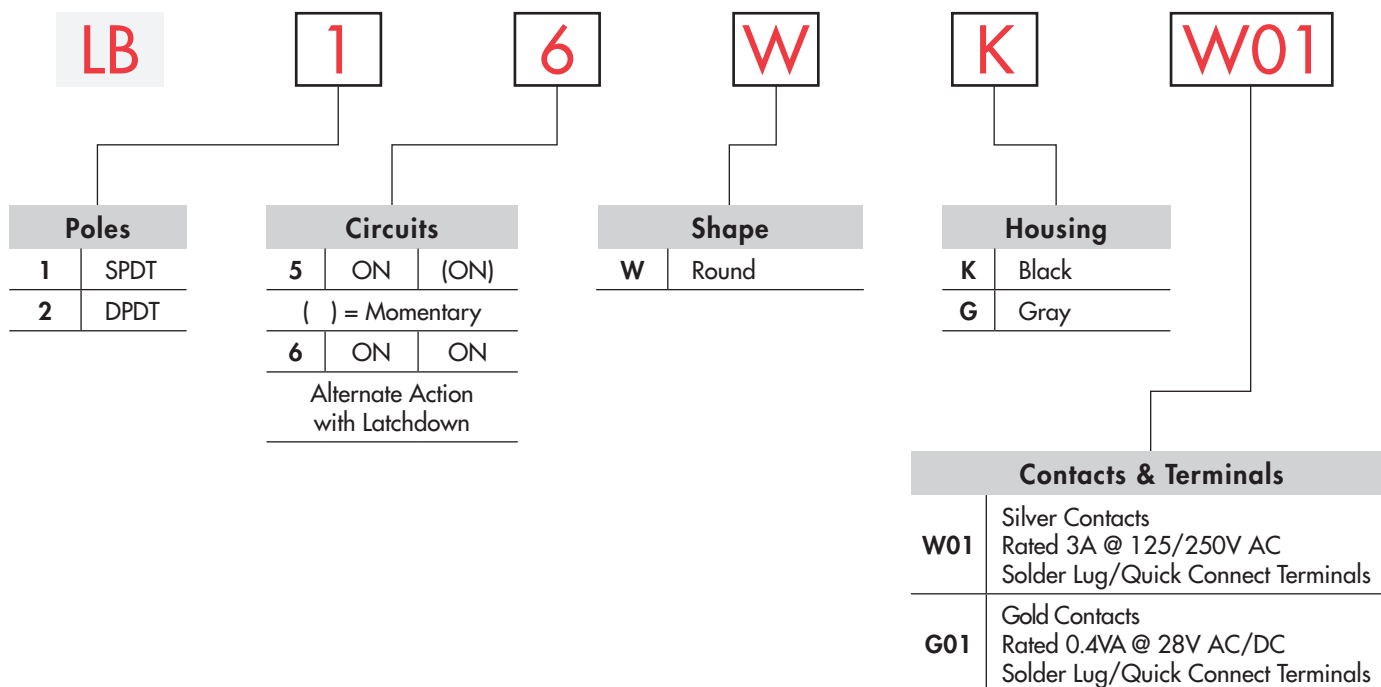


IMPORTANT:




Switches are supplied without UL, cULus & CSA marking unless specified.
UL, cULus & CSA recognized only when ordered with marking on the switch.
 Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

LB16WKW01-5C12-JC

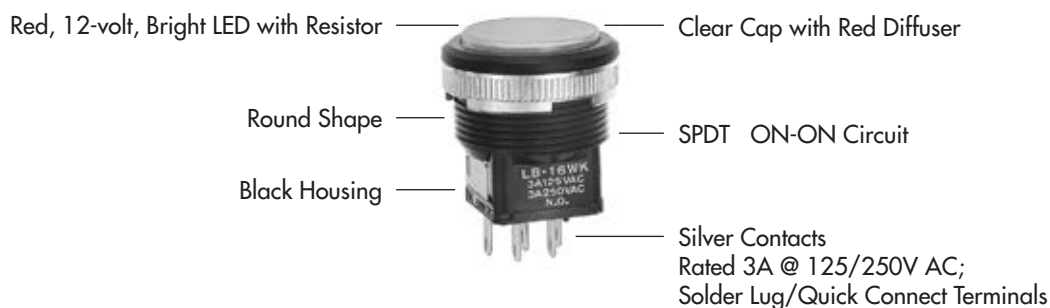

ORDERING EXAMPLE

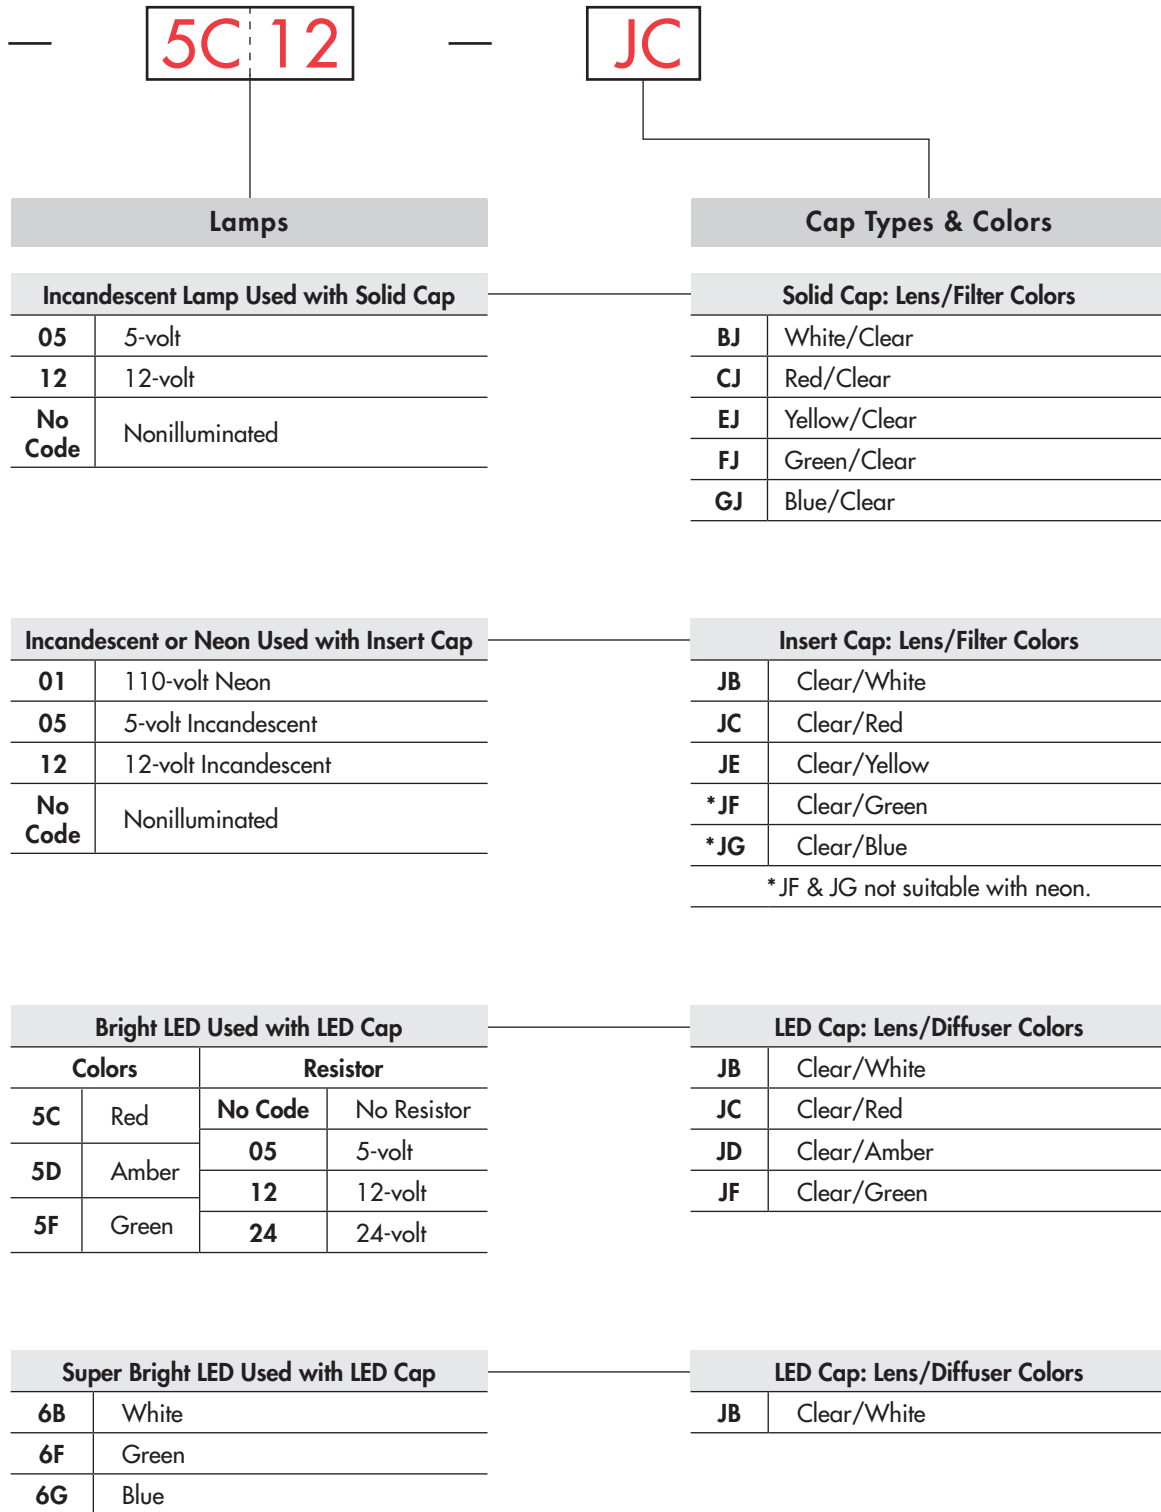

Toggles

Rockers

Pushbuttons

D Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement


POLES & CIRCUITS

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal	Down	Normal	Down	
SP	LB15 *LB16	ON ON	(ON) ON	1-3	1-2	SPDT Notes: Switch is marked with NC, NO, COM, L+, L-. Lamp circuit is isolated and requires external power source.
DP	LB25 *LB26	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT

* When in latchdown position for the alternate circuit, cap position is .039" (1.0mm) above the built-in bezel.

SHAPE & PANEL CUTOUT


W .866" (22.0mm)
Round



Recommended Panel Thickness:
.039" ~ .157" (1.0mm ~ 4.0mm)

Recommended Panel Thickness with Splash Cover:
.039" ~ .138" (1.0mm ~ 3.5mm)

Overtightening the mounting nut AT074
may damage the switch housing.



HOUSING

Housing Colors Available:

K Black

G Gray

CONTACT MATERIALS, RATINGS & TERMINALS

W01 Silver Contacts


Power Level
3A @ 125V AC & 250V AC

Solder Lug/Quick Connect

G01 Gold Contacts

Logic Level
0.4VA max. @ 28V AC/DC max.

Optional PCB adaptors AT711
& AT712 available; illustrated
in previous snap-in subsection.



Complete explanation of operating range in Supplement section.

INCANDESCENT & NEON LAMP CODES & SPECIFICATIONS

AT607 & AT607N



T-1 Bi-pin

AT607 Incandescent 5-volt or
12-volt; AT607N Neon 110-volt

05

12

01 *

Voltage	V	5V AC	12V AC	110V AC
Current	I	115mA	60mA	1.5mA
Endurance	Avg. Hours	10,000		10,000
Ambient Temp. Range		-25°C ~ +50°C		

The electrical specifications shown are
determined at a basic temperature of
25°C. Lamp circuit is isolated and
requires external power source.

* Recommended Resistors for Neon:
33K ohms for 110V AC;
100K ohms for 220V AC



LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source. Polarity marks are on the switch.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.
Additional lamp detail is shown in the Accessories & Hardware section.

Bright LED without Resistor

AT635


LEDs are colored in OFF state.


T-1½ Bi-pin

	Red	Amber	Green	No Code No Resistor		
Color Codes	5C	5D	5F	Red	Amber	Green
Maximum Forward Current	I _{FM}			30mA	30mA	30mA
Typical Forward Current	I _F			20mA	20mA	20mA
Forward Voltage	V _F			1.9V	2.0V	2.1V
Maximum Reverse Voltage	V _{RM}			5V	5V	5V
Current Reduction Rate Above 25°C	ΔI _F			0.42mA/°C		
Ambient Temperature Range				-25° ~ +50°C		


Bright LED with Resistor

<div>AT627 with Resistor</div> <div></div> <div>T-1 Bi-pin</div>	Color Codes:			Resistor Codes			
	Red	Amber	Green				
	5C	5D	5F	05	12	24	
	Maximum Forward Current			I _{FM}	—	—	—
	Typical Forward Current			I _F	52mA	26mA	13mA
	Forward Voltage			V _F	5V	12V	24V
	Maximum Reverse Voltage			V _{RM}	4V	8V	16V
	Current Reduction Rate Above 25°C			ΔI _F	0.50mA/°C		
Ambient Temperature Range				-25° ~ +50°C			


AT627

 5-volt
4-element
with Resistor





AT627

 12-volt
4-element
with Resistor


AT627

 24-volt
4-element
with Resistor


Super Bright Single Element LED

<div>AT625G Blue</div> <div>AT631B White</div> <div>AT632F Green</div> <div></div> <div></div> <div>T-1 Bi-pin</div>	<div><div>ATTENTION ELECTROSTATIC SENSITIVE DEVICES</div></div>	<div><div>6B</div><div>White</div></div>	<div><div>6F</div><div>Green</div></div>	<div><div>6G</div><div>Blue</div></div>	
	Maximum Forward Current	I_{FM}	30mA	30mA	30mA
	Typical Forward Current	I_F	20mA	20mA	20mA
	Forward Voltage	V_F	3.3V	3.3V	3.3V
	Maximum Reverse Voltage	V_{RM}	7V	7V	7V
	Current Reduction Rate Above 25°C	ΔI_F	0.40mA/°C	0.40mA/°C	0.40mA/°C
	Ambient Temperature Range	-25° ~ +50°C			

No Code


No Lamp

CAP TYPES & COLOR COMBINATIONS



Color Codes: B White C Red D Amber E Yellow F Green G Blue J Clear

Solid Cap for Incandescent Lamp & Nonilluminated


Lens/Filter
Colors Available:



AT4054



Translucent
Colored Lens



Transparent
Clear Filter




Lamp
AT607



Material: Polycarbonate Finish: Glossy

Insert Cap for Incandescent or Neon Lamp & Nonilluminated


Lens/Filter
Colors Available:



AT4055



Transparent
Clear Lens



Translucent
Colored Filter



Lamp
AT607



Lamp
AT607N

JF and JG not suitable
with neon lamp.



Material: Polycarbonate Finish: Glossy

Cap for Bright LED without Resistor


Lens/Diffuser
Colors Available:



AT4179



Transparent
Clear Lens



Translucent
Colored Diffuser



Bright LED
AT635



Material: Polycarbonate Finish: Glossy

Cap for Bright LED with Resistor


Lens/Diffuser
Colors Available:




AT4165



Transparent
Clear Lens



Translucent
Colored Diffuser



Bright LED
AT627

Material: Polycarbonate Finish: Glossy



CAP TYPES & COLOR COMBINATIONS




**Clear Lens
White Diffuser**

Material:
Polycarbonate
Finish: Glossy

AT4131



Transparent
Clear Lens



Translucent
Colored Diffuser






LEDs
AT625
AT631
AT632

TYPICAL SWITCH DIMENSIONS

Single & Double Pole

Panel Seal

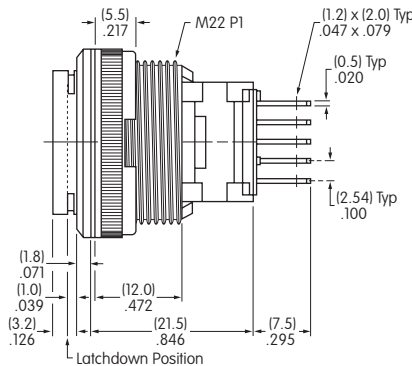

Single pole models do not have terminals 4, 5, & 6.

LB25WKW01-12-JC

OPTIONAL ACCESSORIES

AT9410 Splash Cover for Panel Seal

Materials:






Lid: PVC (loses pliability below 0°C/32°F)

Base: Polyethylene

O-ring: NBR

Recommended Panel Thickness:

.039" ~ .138" (1.0mm ~ 3.5mm)

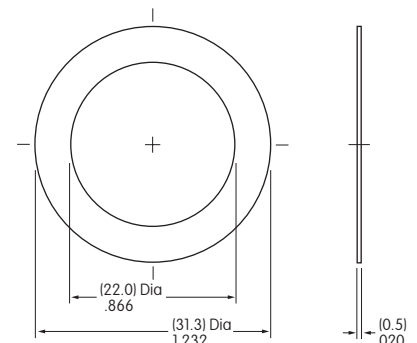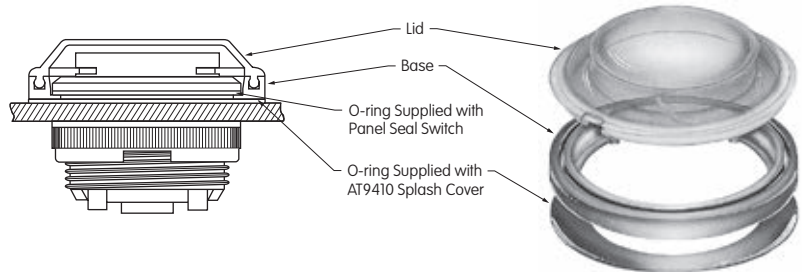


ASSEMBLY INSTRUCTIONS

Lamp Installation & LED Orientation

Incandescent & Neon Lamps AT607 & AT607N


Align projections on lamp with grooves (B) in holder when inserting lamp. To correctly join the lamp holder and cap base, match the cut corners (A).



Bright LED AT627


Panel Seal Models

For panel seal models, Bright LED must first be inserted into the lamp socket which is built into the switch. The cap can then be placed on the switch.




Snap-in Models

For snap-in models, Bright LED must be inserted into the cap first. Align cut corners (C) when inserting the LED.



Bright & Super Bright LEDs AT625, AT631, AT632, AT635



Align D-flat on LED with flat (B) in holder when inserting the LED. To correctly join the lamp holder and cap base, match the cut corners (A).

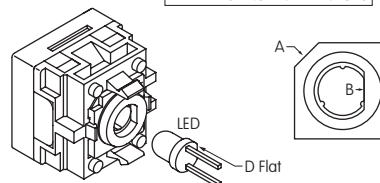

Switch & Cap Assembly


Round & Rectangular

Match clip on cap assembly with receptacle inside switch. Lamp terminals will then be aligned correctly with lamp socket.

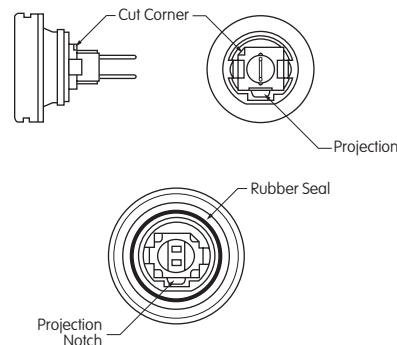


Square

Match projection (C) on cap assembly with groove (C) inside switch. Lamp terminals will then be aligned correctly with lamp socket.

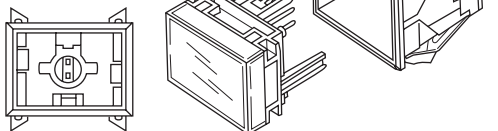

Panel Seal


With Lamps AT607, AT607N, and LEDs AT614, AT625, AT631, AT632: Match projection on cap assembly with notch inside switch. Lamp terminals will then be aligned correctly with lamp socket.



Installation & Maintenance


Snap-in Mount

Snap-in clip holds all switches firmly in place. To mount round switch, match the antirotation projection on switch with guide cut in panel. Snap into panel cutout.



Panel Seal Bushings Mount

Insert switch from the front of the panel with the o-ring between the built-in bezel and the panel. Install mounting nut AT075 (supplied with switch) from the rear of the panel. Overtightening mounting nut may damage the switch housing.



Lamp Replacement

Actuator must be in UP position. Pull off cap with cap extractor AT109. Replace lamp and reassemble as shown above.



AT109
Cap Extractor




AT112
Socket Wrench

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Lens

Recommended Methods: Laser Etch on clear lens, Screen Print, or Pad Print on lens.
Epoxy based ink is recommended.

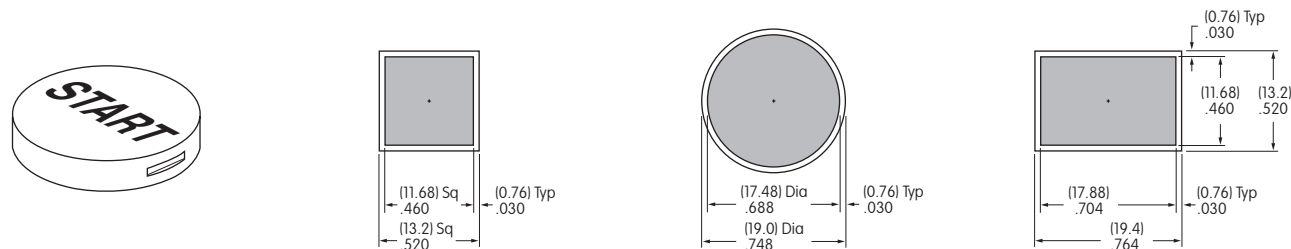


Shaded areas are printable areas.

Suggested Printable Area for Film Insert

Recommended Print Method: Laser Print or Screen Print with Epoxy based ink

Film Insert: Clear Polyester, 4 mil max. thickness

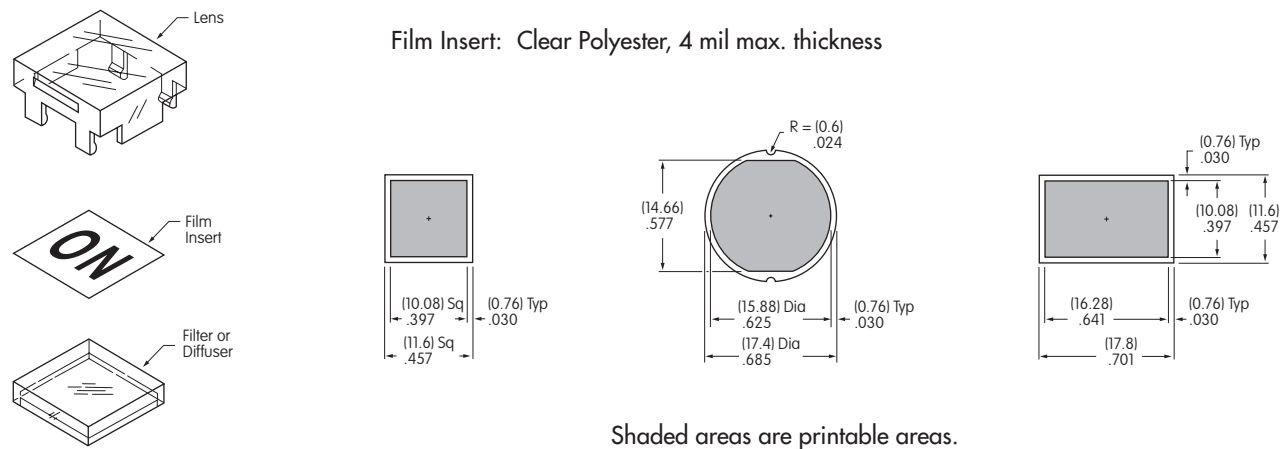

Shaded areas are printable areas.

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC

Other Ratings

Contact Resistance: 50 milliohms maximum (DC2 ~ 4V 100mA)
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum
 1,500V AC minimum between contacts and case for 1 minute minimum
Mechanical Life: 500,000 operations minimum
Electrical Life: 50,000 operations minimum for 3A @ 125V/250V AC & 3A @ 30V DC
 100,000 operations minimum for 1A @ 125V/250V AC & 1A @ 30V DC
Nominal Operating Force: 1.5 ± 0.7N for Single Pole; 3.0 ± 1.2N for Double Pole
Contact Timing: Nonshorting (break-before-make)
Travel: Total Travel .118" (3.0mm)

Materials & Finishes

Actuator: Polycarbonate
Housing: Bushing mount: Glass fiber reinforced polyamide (UL94V-0);
 Snap in mount: Polybutylene terephthalate (PBT) (UL94V-0)
Base: Glass fiber reinforced polyamide (UL94V-0)
Movable Contact: Phosphor bronze & silver with silver plating
Stationary Contacts: Common terminal: Phosphor bronze with silver plating;
 Contact terminals: Phosphor bronze with tin plating
Lamp Terminals: Phosphor bronze with tin plating

Environmental Data

Operating Temperature Range: -10°C through +50°C (+14°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Mounting Torque: 0.8Nm (7.08 lb•in) maximum
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.
Cleaning: Hand clean locally with alcohol based solution

Standards & Certifications

Flammability Standards: UL94V-0 housing & base
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" to end of part number to order UL recognized switch.
 All single & double pole models recognized at 3A @ 125V/250V AC or 3A @ 30V DC.

Note: The spot illuminated switches do not have UL approval and cannot be ordered with the markings.

Distinctive Characteristics

Environmentally friendly components and packaging materials meet RoHS Directive restricting use of hazardous materials. Suited for lead-free soldering because of heat resistant resin materials.

Smooth, slightly concave surface of cap designed to fit fingertip. Unique design and construction of cap prevents its removal and limits tampering.

Bright LED illumination in choice of red, green or amber through translucent white cap. Spot illumination in red, green or amber enhanced by black cap.

Short body of .551" (14.0mm) conserves behind-panel space.


Installation options include 16.0mm bushing mount or 17.3mm snap-in mount.

Combination solder lug and .110" quick connect terminals are epoxy sealed to prevent entry of flux, dust, or other contaminants.

Crisp actuation and clear circuit status provided by snap-action contact mechanism. Arc barrier between movable contacts protects against crossover.



Actual Size

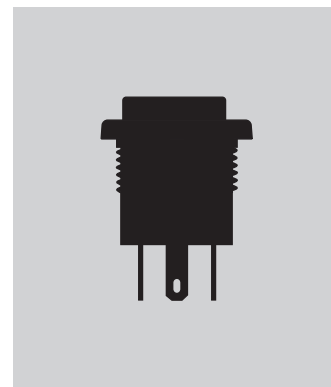

TYPICAL SWITCH ORDERING EXAMPLE

LP01 **1** **5** **C** **C** **K** **W01** **5C** **B**

Poles	
1	SPDT
2	DPDT

Mounting Types	
C	Bushing
M	Snap-in

Contacts & Terminals	
W01	Silver Rated 3A @ 125V AC/250V AC Solder Lug/ Quick Connect Terminals

Circuit		
5	ON	(ON)
() = Momentary		

Housing	
K	Black

LEDs	
5C	Red
5D	Amber
5F	Green

Cap Color	
A	Black with Spot Illumination
B	White

IMPORTANT:


Switches are supplied without UL & cULus markings unless specified. **UL & cULus recognized only when ordered with marking on switch.** Specific models, ratings, & ordering instructions are noted on the General Specifications page. Spot illuminated switches do not have UL approval and cannot be ordered with the markings.

Nonilluminated

Nonilluminated Cap Colors	
A	Black
C	Red
F	Green

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

LP0115CCKW015CB

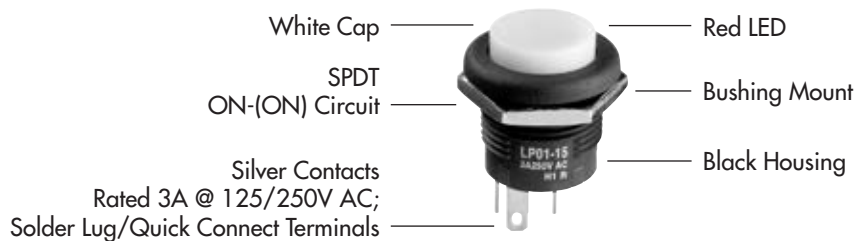

POLES & CIRCUIT

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Power/Lamp Schematics
		Normal	Down	Normal	Down	
SP	LP0115	ON	(ON)	1-3	1-2	SPDT Note: Terminal markings "COM, NO, NC, L, + and -" are actually on the switch; terminal numbers are not on the switch.
DP	LP0125	ON	(ON)	1-3 4-6	1-2 4-5	DPDT


MOUNTING TYPES

C**Bushing****.630" (16.0mm) Diameter**

This mounting option is supplied with a steel hexagon nut with nickel plating.




Recommended Panel Thickness:
.079" ~ .256"
(2.0mm ~ 6.5mm)

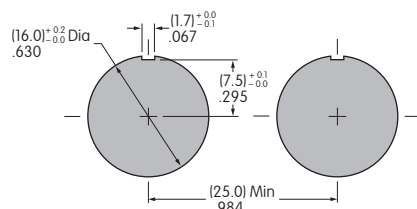

Allow .984" (25.0mm) distance from center-to-center between switches when mounted side-by-side.

M**Snap-in****.681" (17.3mm) Diameter**

Recommended Panel Thickness:
.039" ~ .126"
(1.0mm ~ 3.2mm)

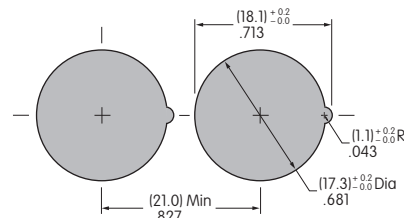

Allow .827" (21.0mm) distance from center-to-center between switches when mounted side-by-side.

HOUSING


K**Black**

Housing available in black only. The one-piece body and bezel have a matte finish.

CONTACT MATERIALS, RATINGS, & TERMINALS


W01**Silver Contacts****Power Level****3A @ 125V AC/250V AC; 3A @ 30V DC****Solder Lug/****.110" (2.8mm) Quick Connect**

Note: If used at 1A @ 125V AC/250V AC or 1A @ 30V DC, electrical life will be 100,000 operations minimum.



LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Polarity marks are on the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section.

LEDs are an integral part of the switch and are not available separately.	Single Color LED with 1 Element 		5C Red	5D Amber	5F Green
	Maximum Forward Current	I_{FM}	30mA	30mA	30mA
	Typical Forward Current	I_F	20mA	20mA	20mA
	Forward Voltage	V_F	1.95V	2.0V	2.1V
	Maximum Reverse Voltage	V_{RM}	5V	5V	5V
	Current Reduction Rate Above 25°C	ΔI_F	0.41mA/°C	0.29mA/°C	0.39mA/°C
	Ambient Temperature Range		-10°C ~ +50°C		

No Code**No Lamp**

CAP COLORS

Spot Illuminated Cap

Cap Color Available:

A

Black with
Spot Illumination



Illuminated Cap

Cap Color Available:

B

White



Nonilluminated Cap

Cap Colors Available:

A

Black



C

Red

F

Green



Material: Polycarbonate Finish: Matte
Spot illuminated, illuminated, and nonilluminated caps are an integral part of the switch and are not available separately.

TYPICAL SWITCH DIMENSIONS


Bushing Mount




LP0115CCKW015CB



Single Pole





Double Pole




Snap-in Mount




LP0115CMKW015CB



Single Pole





Double Pole




Bushing Mount & Spot Illumination




LP0115CCKW015CA



Single Pole





Double Pole




Snap-in Mount & Spot Illumination




LP0115CMKW015CA



Single Pole





Double Pole





OPTIONAL ACCESSORIES

Adaptors



AT716
Single Pole
Solder Lug/
Quick Connect
Terminals







AT717
Double Pole
Solder Lug/
Quick Connect
Terminals



AT718
Single Pole
Straight PC
Terminals



AT719
Double Pole
Straight PC
Terminals




Material: Glass fiber reinforced polyamide Note: Order adaptors separately

Switch Dimensions Shown with Adaptor AT716

Dimension A: Solder Lug .197" (5.0mm); Straight PC .157" (4.0mm)

Panel thickness for LP01 Bushing Mount: .079" ~ .256" (2.0mm ~ 6.5mm)



LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.


Suggested Printable Area for LP01 Cap



Recommended Methods:

Pad Print or Laser Etch on cap.

Epoxy based ink is recommended.



Shaded area is printable area

Note: Suggested printable area does not apply to spot illuminated cap.

General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 250V DC
Dielectric Strength: 250V AC minimum between contacts for 1 minute minimum
Mechanical Life: 500,000 operations minimum
Electrical Life: 500,000 operations minimum
Nominal Operating Force: **Standard:** 1.5N \pm 0.5 Newtons
High: 2.5N \pm 0.8 Newtons
Stroke: 1.5mm (.059")

Materials & Finishes

Actuator: Silicon rubber
Case: Polycarbonate resin
Base: Glass fiber reinforced polyamide resin
Movable Contact: Silver over nickel with gold plating
Stationary Contacts: Brass with gold plating
Switch Terminals: Brass with gold plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 5.0N maximum downward force on actuator

PCB Processing

Soldering: Wave Soldering: 270°C maximum @ 6 seconds maximum
 Manual Soldering: 390°C maximum @ 4 seconds maximum
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

The NP01 Series pushbuttons have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Soft touch actuation achieved by mechanical silicon rubber structure.

Distinct, long stroke of 1.5mm (.059").

Entire cap is fully illuminated with single or bicolor LED.

Compact design with dimension of 12.5mm (.492") from PC board to top of cap.


Alternating legend options with bicolor LED.

Available in both high (2.5N) or standard (1.5N) operating force.


Gold plated contacts provide high reliability.

Crimped terminals ensure secure PC mounting and prevent dislodging during soldering.

Molded-in terminals prevent entry of flux, solvents, and other contaminants.

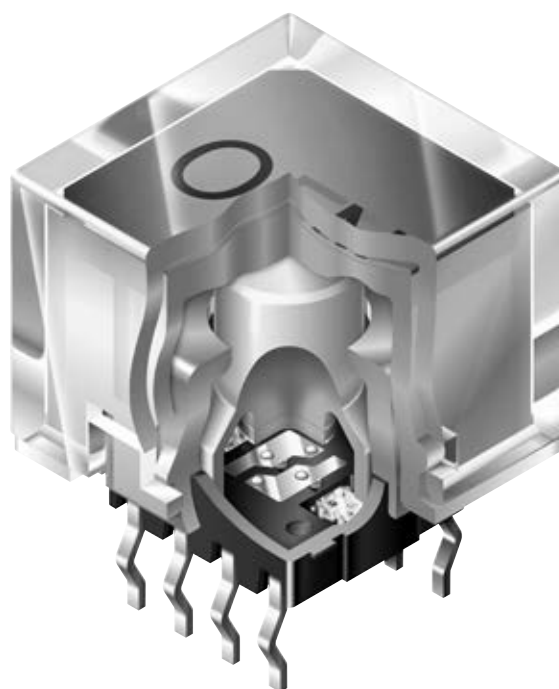

Actual Size

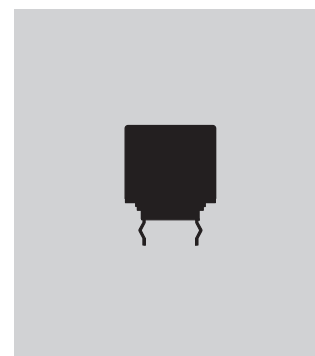

TYPICAL SWITCH ORDERING EXAMPLE

NP01 **15** **H** **G03** **L** **F** — **JF**

Pole & Circuit			
15	SPST	OFF	(ON)
() = Momentary Normally Open Contacts			

Contacts & Terminals	
G03	Gold Contacts and PC Terminals, Rated 0.4VA @ 28V AC/DC

Illumination	
L	Illuminated
N	Nonilluminated

Operating Force	
A	Standard (1.5N) (Black Switch Body)
H	High (2.5N) (Gray Switch Body)

LEDs	
Single or Bicolor LED	
C	Red
D	Amber
F	Green
CF	Bicolor Red/Green
DG	Bicolor Amber/Blue
Bicolor LED	
CF	Red/Green
DG	Amber/Blue
Nonilluminated	
N	No LED

Cap Types & Colors	
Cap Lens/Diffuser Colors	
JB	Clear/White (Combine with any LED)
JC	Clear/Red
JD	Clear/Amber
JF	Clear/Green
Bicolor Alternating Legend Caps	
JCF	Red/Green
JDG	Amber/Blue
Solid Color Cap	
A	Black
B	White
C	Red
H	Gray

Packaging		
No Code	Partitioned Tray, Any Quantity (With or without caps installed)	
S	Stick-Tube 50 Pieces/Stick (For switch body only; caps packaged separately)	

Alternating Legends		
11	ON (pos)	OFF (pos)
12	ON (neg)	OFF (neg)
13	START	STOP
14	OPEN	CLOSE


Contact factory for custom options.

Part Numbers for Alternating Legends	
Color	Part Number
Red/Green	AT3023JCF11 ~ AT3023JCF14
Amber/Blue	AT3023JDG11 ~ AT3023JDG14

Refer to Ordering Table for Alternating Legend that corresponds with last 2 digits of part number.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

NP0115HG03LF-JF

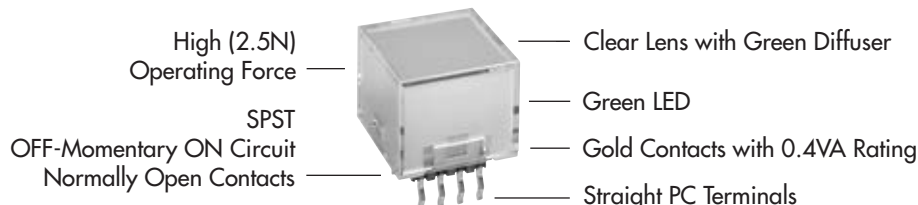

POLE & CIRCUIT

Illuminated Models

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch Schematic
Pole	Model	Normal	Down			
						Notes: Switch is marked with LC1, 1, L3, L4, L1, L2, 2, LC2. Lamp circuit is isolated and requires an external power source.
SP	NP0115AG03L NP0115HG03L	OFF	(ON)	Normally Open	1-2	SPST

Nonilluminated Models

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch Schematic
Pole	Model	Normal	Down			
						Note: Switch is marked with LC1, 1, L3, L4, L1, L2, 2, LC2.
SP	NP0115AG03N NP0115HG03N	OFF	(ON)	Normally Open	1-2	SPST

OPERATING FORCE

A

Standard Nominal Operating Force
1.5 ±0.5N
Switch base is Black

H

High Nominal Operating Force
2.5 ±0.8N
Switch base is Gray

CONTACTS, TERMINALS, & RATING

G03

Gold Contacts

Straight PC Terminals

0.4VA maximum @ 28V AC/DC maximum

ILLUMINATION

L

Illuminated


N

Nonilluminated

LED COLORS & SPECIFICATIONS

LEDs are an integral part of the switch and not available separately. The electrical specifications shown are determined at a basic temperature of 25°C.

If the source voltage exceeds the forward voltage, a ballast resistor is required. Specifications in parentheses () below for Bicolor LED denote simultaneous illumination of Red and Green.




$$R = \frac{E - V_F}{I_F}$$


Where: R = Resistor Value (Ohms)
E = Source Voltage (V)
V_F = Forward Voltage (V)
I_F = Forward Current (A)




	Color	Single Color LED			Bicolor LED			
		C Red	D Amber	F Green	CF Red Green	DG Amber Blue		
Maximum Forward Current I _{FM}		30mA	30mA	25mA	30 (25)mA	25 (25)mA	30mA	30mA
Typical Forward Current I _F		20mA	20mA	16mA	20 (20)mA	16 (5)mA	20mA	20mA
Forward Voltage V _F		1.95V	2.0V	3.3V	1.95V	3.3V	2.0V	3.2V
Maximum Reverse Voltage V _{RM}		5V	5V	5V	5V	5V	5V	5V
Current Reduction Rate ΔI _F		0.41mA/°C above 25°C	0.38mA/°C above 25°C	0.33mA/°C above 25°C	0.40mA/°C above 25°C	0.33mA/°C above 25°C	0.40mA/°C above 25°C	0.40mA/°C above 25°C
Ambient Temperature Range		-25° ~ +50°C			-25° ~ +50°C			




Red or
Green LEDs



Red/Green
Bicolor LED




Amber/Blue
Bicolor LED



CAP TYPES & COLORS

AT3022 12mm Square Cap

Material:
Polycarbonate Resin



Cap for Single or Bicolor LED




Clear Lens/White Diffuser
Clear Lens/Red Diffuser



Clear Lens/Amber Diffuser
Clear Lens/Green Diffuser

AT3023 12mm Square Cap

Material:
Polycarbonate Resin



Alternating Legend Cap for Bicolor LED



Red/Green
Amber/Blue

Clear Lens
Alternating Legend Filter

Standard Alternating Legend Pairs

11

ON

OFF

Green/Red
or
Blue/Amber

12

ON

OFF

Green/Red
or
Blue/Amber

13

START

STOP

Green/Red
or
Blue/Amber

14

OPEN

CLOSE

Green/Red
or
Blue/Amber

Cap illumination is alternating Green/Red or Blue/Amber; legend text is black.


Contact factory for other Alternating Legends.

Legend illustrations are approximate representations of the actual characters on the filters.

CAP TYPES & COLORS (CONTINUED)

AT3024 12mm Square Cap

Material:
Polycarbonate Resin



Solid Color Cap for Nonilluminated



Black



White







Red



Gray

TYPICAL SWITCH DIMENSIONS

Illuminated • Straight PC



NP0115HG03LF-JF

PACKAGING



Partitioned Tray



Any quantity. No code is required. Switches may be packaged with or without caps installed.



Stick-Tube Packaging

50 pieces per stick


Switches must be ordered in 50-piece increments when stick-tube packaging is selected. This packaging is for the switch body only. Caps will be packaged separately.

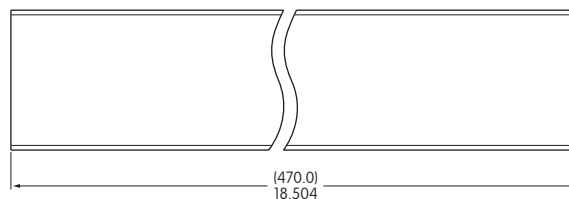

LEGEND ORIENTATION

Top View


Bottom View



Orient cap with legend as shown here, and "LC2" at lower right of switch body. Orders for switches with legends will be assembled as illustrated.

PRECAUTIONS FOR HANDLING & STORAGE

- NP01 Pushbuttons are electrostatically sensitive. To prevent damage to LED, devices must be properly isolated from static electricity.
 - Once the cap is installed onto the switch body, it cannot be removed.
 - When assembling cap, align projection on switch body to slot on inside of cap. (Refer to illustration at right.)
 - * Legends may be printed on the lens with laser etch, screen print or pad print methods. Epoxy based ink is recommended.
 - Do not use excessive force during installation on PC board or for cap installation.
- * NKK Switches can provide custom legends for caps. Contact factory for more information.



General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 5A @ 125/250V AC or 5A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary;
 200,000 operations minimum for alternate action
Electrical Life: 10,000 operations minimum for silver;
 100,000 operations minimum for silver with resistive load of 3A @ 125V AC
 200,000 operations minimum for gold
Nominal Operating Force: Single Pole: 1.9N for Square & 1.9N for Rectangular
 Double Pole: 2.55N for Square & 3.1N for Rectangular
Contact Timing: Break before make
Travel: Pretravel .067" (1.7mm); Overtravel .024" (0.6mm); Total Travel .091" (2.3mm)

Materials & Finishes

Housing/Bezel: Glass fiber reinforced polyamide (UL94V-0)
Snap-in Frame: Stainless steel
Movable Contactor: Phosphor bronze
Movable Contacts: Silver alloy or copper with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Switch Terminals: Phosphor bronze with silver or gold plating
Lamp Terminals: Brass with silver plating
Base: Glass fiber reinforced liquid crystal polymer (UL94V-0)

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -20°C through +70°C (-4°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 7.55N (1.70 lbf) maximum downward force on cap
Soldering Time & Temp: Wave Soldering (PC version): See Profile A in Supplement section.
 Manual Soldering: See Profile A in Supplement section.
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards: UL94V-0 housing/bezel & base
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" before dash in part number to order UL recognized switch.
 UL recognized only when ordered switch body with cap assembled.
 All single & double pole models recognized at 5A @ 125/250V AC or 0.014A @ 28V DC.
CSA: **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
 Add "/C" before dash in part number to order CSA certified switch.
 All single & double pole models certified at 5A @ 125/250V AC or 5A @ 30V DC or
 0.4VA maximum @ 28V AC/DC maximum.

Distinctive Characteristics

Red/green and amber/blue bicolours with alternating standard or custom legends.
Super bright LED provides brilliant uniform illumination.

Bright or super bright LEDs (an integral part of the switch) of red, amber, green, blue, or white, in full face or spot illumination plus square or rectangular models.

Combination of PCB mountability and short body allows use in compact applications.

Small behind panel dimension for snap-in mounting in tight spaces.


Snap-acting contact mechanism provides sensitive actuation with audible feedback; quick-make, quick-break characteristic limits arcing and prolongs electrical life.

Latchdown mechanism, independent of switching mechanism, gives visible and tactile indication of circuit status.


Terminals are epoxy sealed to lock out flux, solvents, and other contaminants.

Momentary and alternate action circuits available in the same space-saving body size.

Matching indicators available.

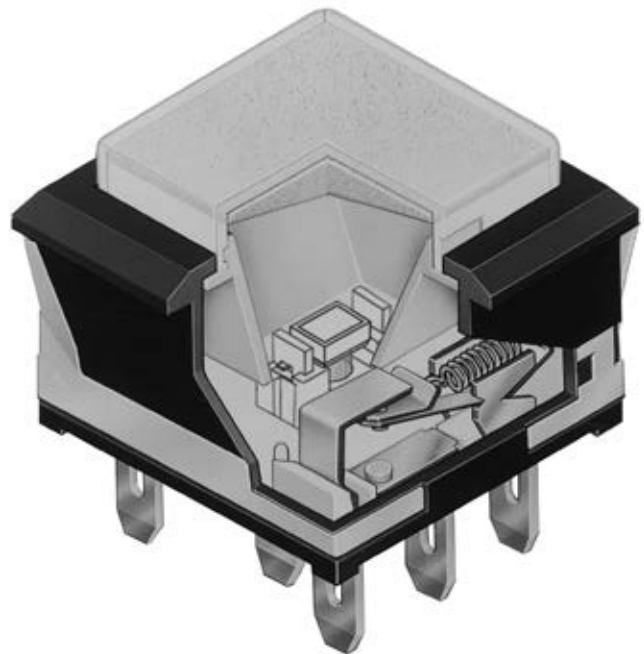

Actual Size



TYPICAL SWITCH

UB

1

5

SK

G

03

Poles

1	SPDT
2	DPDT

Circuits

5	ON	(ON)
() = Momentary		
6	ON	ON
Alternate Action with Latchdown		

Mounting Types

PCB Mounting

SK	Square
RK	Rectangular
* Snap-in Mounting	
KK	Square
NK	Rectangular
NBK	Rectangular with Side Barriers

* Standard with Solder Lug terminals

Contacts & Ratings

W	Silver Rated 5A @ 125/250V AC
G	Gold Rated 0.4VA max @ 28V AC/DC max

Terminals

01	Solder Lug (for Snap-in Mounting)
03	Straight PC

IMPORTANT:

Switches are supplied without UL, cULus & CSA marking unless specified. **UL, cULus & CSA recognized only when ordered with marking on the switch.** Specific models, ratings, & ordering instructions are noted on General Specifications page.



DESCRIPTION FOR TYPICAL ORDERING EXAMPLE


UB15SKG035C-CC

Gold Contacts with 0.4VA Rating
Square with PCB Mounting



Red, Bright LED & Red Lens with Red Diffuser
SPDT ON-(ON) Circuit
Straight PC Terminals

ORDERING EXAMPLE

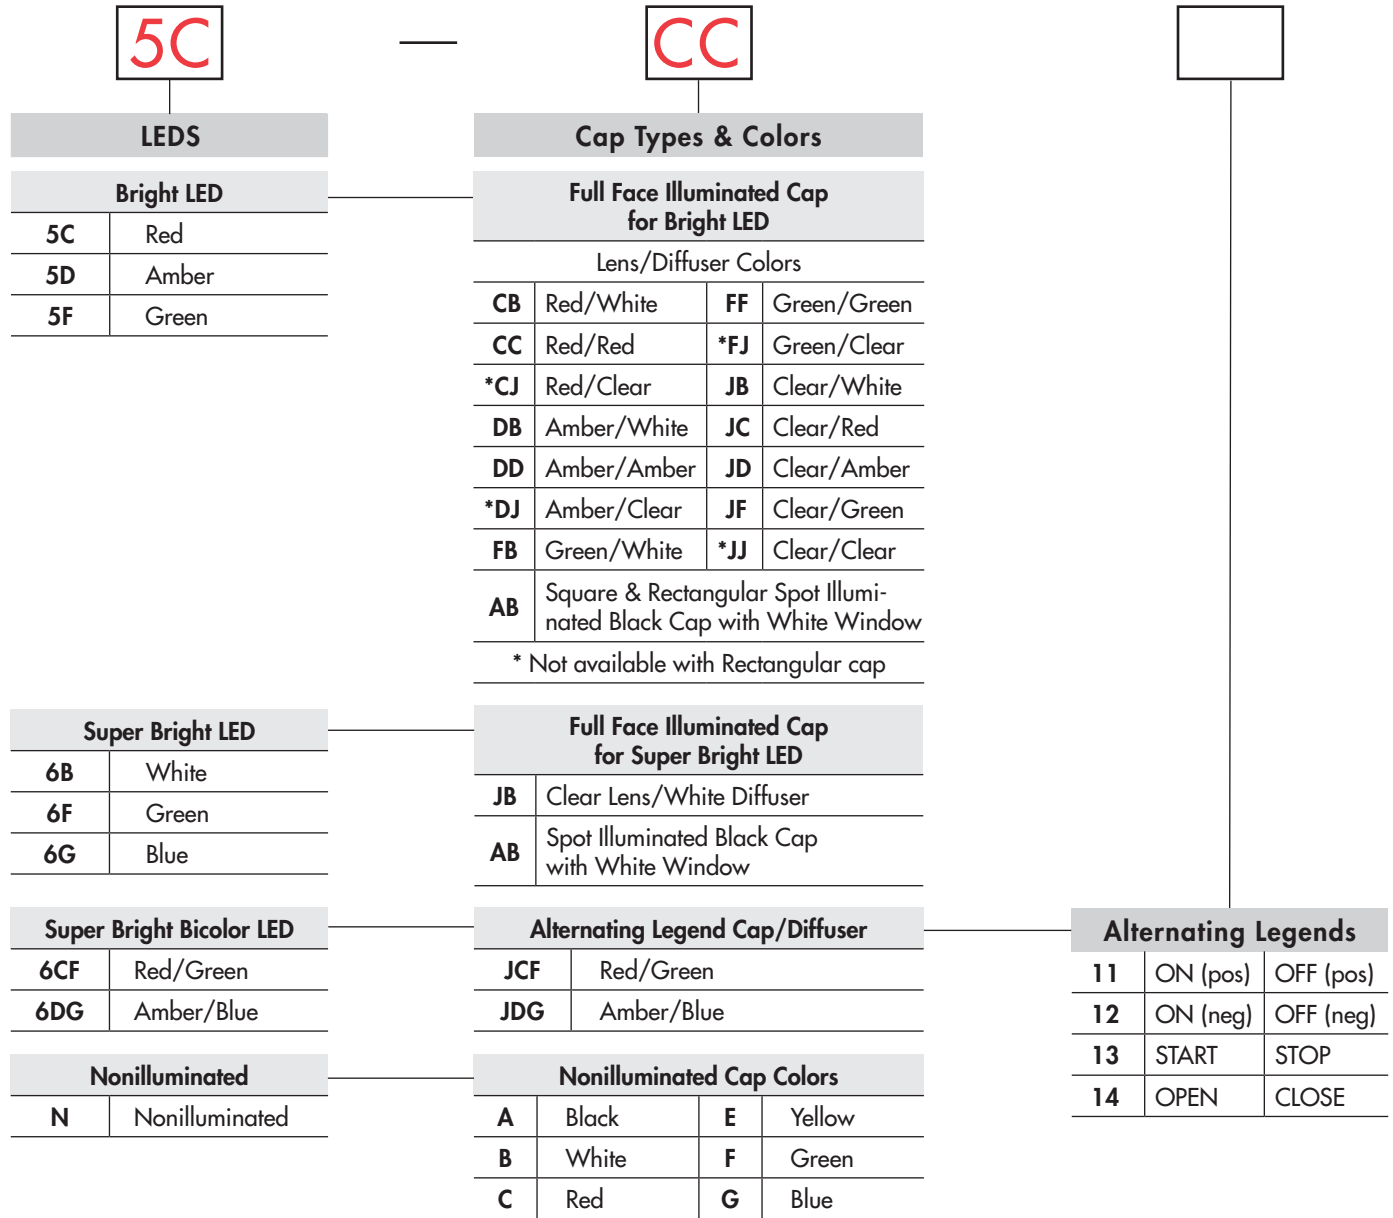

Part Numbers for Alternating Legends

Square Alternating Legends				Rectangular Alternating Legends			
Color	Part Number	Color	Part Number	Color	Part Number	Color	Part Number
Red/Green	AT9450CF11	Amber/Blue	AT9450DG11	Red/Green	AT9451CF11	Amber/Blue	AT9451DG11
	AT9450CF12		AT9450DG12		AT9451CF12		AT9451DG12
	AT9450CF13		AT9450DG13		AT9451CF13		AT9451DG13
	AT9450CF14		AT9450DG14		AT9451CF14		AT9451DG14

Refer to Ordering Table for Alternating Legend that corresponds with last 2 digits of part number.


POLES & CIRCUITS

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
Pole	Model	Normal	Down	Normal	Down	Notes: Switch is marked with NC, NO, COM, L+ & L-. Lamp circuit is isolated and requires an external power source.
SP	UB15 *UB16	ON ON	(ON) ON	1-3	1-2	
DP	UB25 *UB26	ON ON	(ON) ON	1-3 4-6	1-2 4-5	SPDT DPDT


* When in latchdown position for the alternate circuit, cap position is .039" (1.0mm) above the housing.

MOUNTING TYPES & SHAPES

PCB Mounting

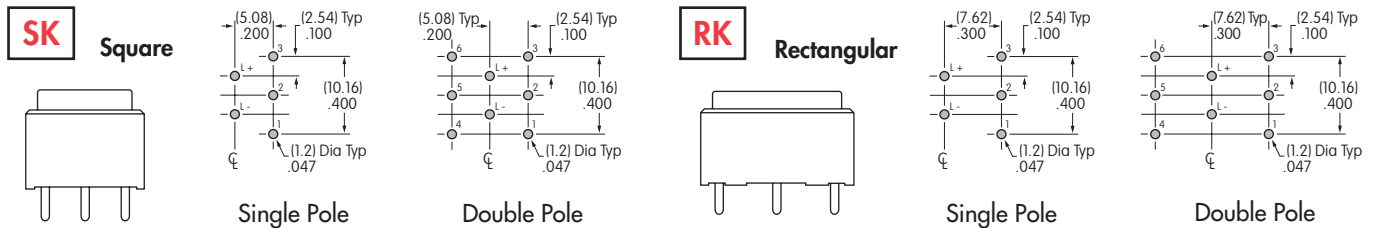

Snap-in Mounting (Solder Lug)

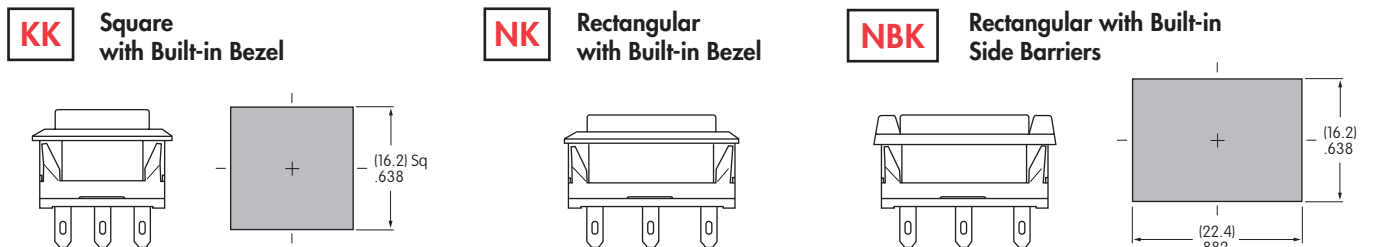

Snap-in Mounting with Solder Lug terminals is the standard combination. Panel Thickness: .039 ~ .126" (1.0 ~ 3.2mm)

CONTACT MATERIALS & RATINGS

W	Silver Contacts	Power Level	5A @ 125V AC & 250V AC
G	Gold Contacts	Logic Level	0.4VA maximum @ 28V AC/DC maximum


Complete explanation of operating range in Supplement section.

TERMINALS



BRIGHT & SUPER BRIGHT LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Polarity marks are on bottom of switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. Resistor value can be calculated by using the formula in the Supplement section. LED is an integral part of switch and not available separately.

Super Bright LEDs are Electrostatic Sensitive		Color	Bright			Super Bright			Unit
			5C	5D	5F	6B	6F	6G	
			Red	Amber	Green	White	Green	Blue	
Maximum Forward Current	I_{FM}		30	30	25	20	30	30	mA
Typical Forward Current	I_F		20	20	20	15	20	20	mA
Forward Voltage	V_F		1.85	2.0	2.1	3.3	3.2	2.9	V
Maximum Reverse Voltage	V_{RM}		5	5	5	5	5	5	V
Current Reduction Rate Above 25°C	ΔI_F		0.40	0.42	0.46	0.25	0.40	0.33	mA/°C
Ambient Temperature Range			-25° ~ +50°C			-25° ~ +50°C			

N No Lamp

CAP TYPES & COLOR COMBINATIONS


Full Face Illuminated Cap for Bright LED & Super Bright Single Color LED

Lens/Diffuser

Colors Available for Square Cap:

CB	DD	FJ	JF
CC	DJ	JB	JJ
CJ	FB	JC	
DB	FF	JD	

AT4074
Lens



AT4075
Diffuser




Lens/Diffuser


Colors Available for Rectangular Cap:

CB	FB	JD
CC	FF	JF
DB	JB	
DD	JC	

AT4117
Lens



AT4118
Diffuser



Lens & Diffuser Material: Polycarbonate

Lens Finish: Glossy

Diffuser Finish: Textured

Spot Illuminated Caps for Bright & Super Bright LEDs


Cap/Window Colors Available:

AB Black Cap with Translucent White Window for LED Display


Material: Polycarbonate

AT4119 Square for Bright and Super Bright LED

Finish: Matte



AT4120 Rectangular for Bright and Super Bright LED




Full Face Illuminated Caps for Super Bright Bicolor LED

JB


AT4074 Square Lens

AT4188 Square Diffuser



AT4117 Rectangular Lens

AT4189 Rectangular Diffuser

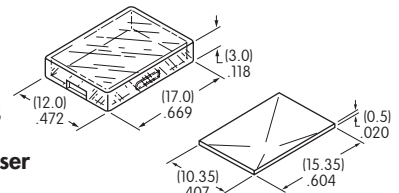

Lens & Diffuser Material: Polycarbonate

Lens Finish: Glossy

Diffuser Finish: Textured


Cap Colors Available:

A	C	F
B	E	G


Material: Polycarbonate
Finish: Glossy

Opaque Caps for Nonilluminated

AT4073
Square



AT4116
Rectangular




Color Codes: A Black B White C Red D Amber E Yellow F Green G Blue J Clear

SUPER BRIGHT BICOLOR LEDS FOR ALTERNATING LEGENDS


The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Polarity marks are on bottom of switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. Resistor value can be calculated by using the formula in the Supplement section. LED is an integral part of switch and not available separately.

Electrical Specifications for Super Bright Bicolor LEDs


Super Bright LEDs are Electrostatic Sensitive		6CF Red/Green		6DG Amber/Blue		Unit
		Red	Green	Amber	Blue	
Maximum Forward Current	I_{FM}	* 30	* 30	* 30	* 30	mA
Typical Forward Current	I_F	20	20	20	20	mA
Forward Voltage	V_F	2.3	3.2	2.1	3.0	V
Maximum Reverse Voltage	V_{RM}	4	4	4	4	V
Current Reduction Rate Above 25°C	ΔI_F	0.33	0.33	0.33	0.33	mA/°C
Ambient Temperature Range		-25° ~ +50°		-25° ~ +50°		°C

* Value applies to single color illumination for either Red or Green or Amber or Blue. When both colors are illuminated simultaneously, the sum of the currents should not exceed the smallest value of the maximum forward current.

Super Bright Bicolor Red/Green LED with 2 elements




Super Bright Bicolor Amber/Blue LED with 2 elements



Alternating Legend Caps for Super Bright Bicolor LED

JCF **JDG**

AT4074 12.0mm Square Flat Cap



AT9450 Square Legend Insert




AT4188 Square Diffuser



JCF **JDG**

AT4117 12.0mm x 17.0mm Rectangular Flat Cap



AT9451 Rectangular Legend Insert



AT4189 Rectangular Diffuser



Lens & Diffuser Material: Polycarbonate Legend Insert Material: Polyethylene Terephthalate (PET)
Lens Finish: Glossy Diffuser Finish: Textured

Standard Alternating Legend Pairs

11

ON

OFF

Green/Red or Blue/Amber

12

ON

OFF

Green/Red or Blue/Amber

13

START

STOP

Green/Red or Blue/Amber

14

OPEN

CLOSE

Green/Red or Blue/Amber




Cap illumination is alternating Green/Red or Blue/Amber; legend text is black.
Contact factory for other Alternating Legends.

Legend illustrations are approximate representations of the actual characters on the filters.

TYPICAL SWITCH DIMENSIONS

Single & Double Pole

Square • PCB Mount


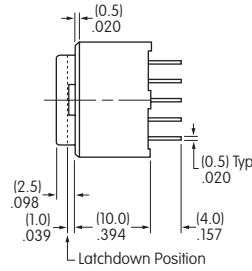



Single pole models do not have terminals 4, 5, & 6.

UB15SKG035C-CB

Single & Double Pole

Rectangular • PCB Mount


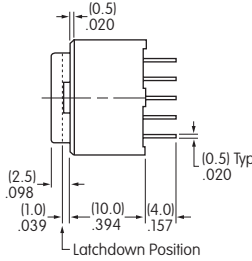



Single pole models do not have terminals 4, 5, & 6.

UB26RKG035D-DD

Single & Double Pole

Square • Snap-in Mount • Built-in Bezel






Single pole models do not have terminals 4, 5, & 6.

UB25KKW015C-CB

Single & Double Pole

Rectangular • Snap-in Mount • Built-in Bezel






Single pole models do not have terminals 4, 5, & 6.

UB26NKW015F-FF

Single & Double Pole

Rectangular • Snap-in Mount • Built-in Side Barriers



Single pole models do not have terminals 4, 5, & 6.

UB25NBKW015F-FB

OPTIONAL ACCESSORIES

Spring Loaded Protective Guard for Snap-in Mounting of Square PCB Model






AT4173 Square Protective Guard/ Snap-in Frame

Opens 180°
Closes automatically


Materials:
Cover: Clear Polycarbonate
Base: Black Polyamide
Coil Spring: Stainless Steel

**Recommended
Panel Thickness:**
.039" ~ .126"
(1.0mm ~ 3.2mm)

**Recommended
Panel-to-PCB Range:**
.354" ~ .433"
(9.0mm ~ 11.0mm)

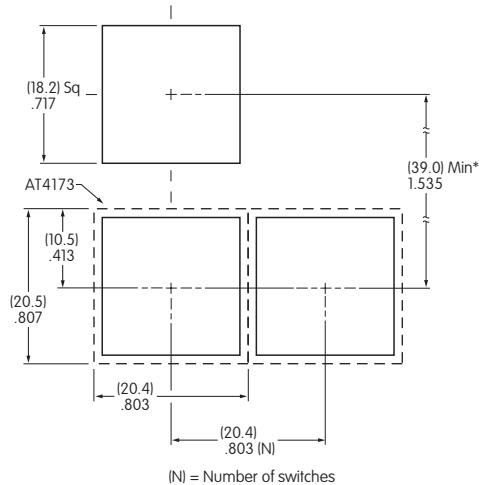


(N) = Number of switches
* Minimum dimension allows opening of cover to 180°



Installation


- ① Install switch onto PC board.
- ② Snap protective guard into panel.
- ③ Join the two assemblies.

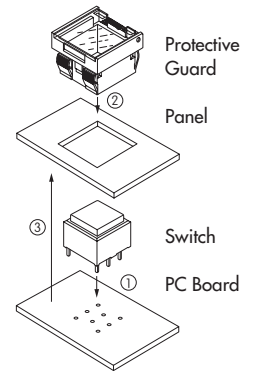




Spring Loaded Protective Guard for Square Snap-in Model

AT4171 Square Protective Guard

Opens 180°
Closes automatically

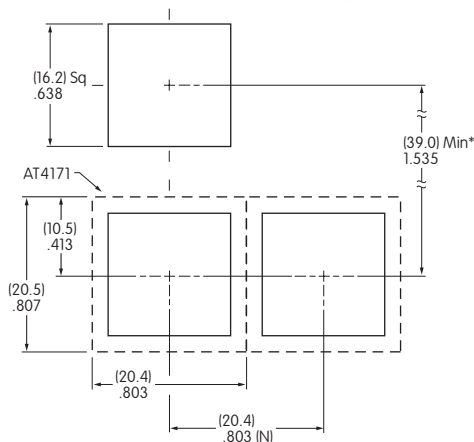


(N) = Number of switches * Minimum dimension allows opening of cover to 180°



Materials:

Cover: Clear Polycarbonate
Base: Black GFR Polyamide
Coil Spring: Stainless Steel

Recommended Panel Thickness:
.039" ~ .106" (1.0mm ~ 2.7mm)



OPTIONAL ACCESSORIES

Spring Loaded Protective Guard for Snap-in Mounting of Rectangular PCB Model




AT4174 Rectangular Protective Guard/ Snap-in Frame

Opens 180°
Closes automatically


Materials:
Cover: Clear Polycarbonate
Base: Black Polyamide
Coil Spring: Stainless Steel

**Recommended
Panel Thickness:**
.039" ~ .126"
(1.0mm ~ 3.2mm)

**Recommended
Panel-to-PCB Range:**
.354" ~ .433"
(9.0mm ~ 11.0mm)

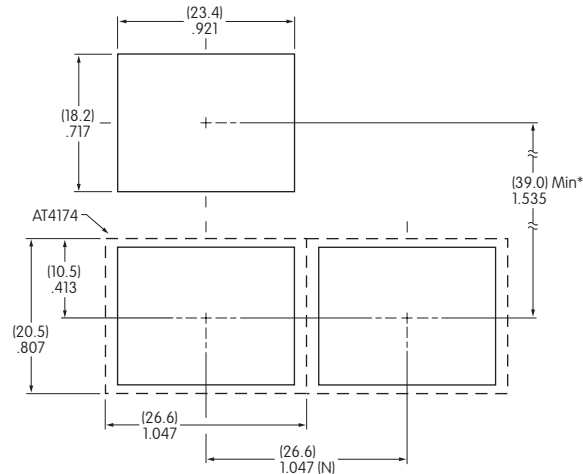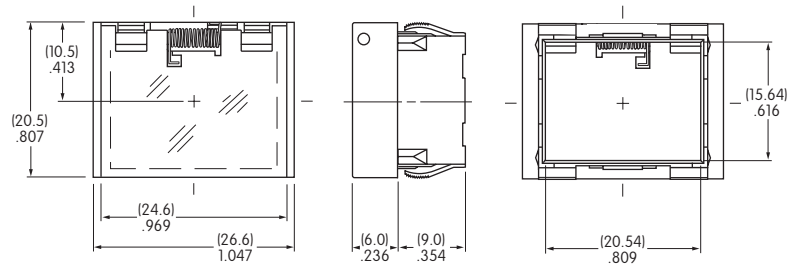



(N) = Number of switches * Minimum dimension allows opening of cover to 180°

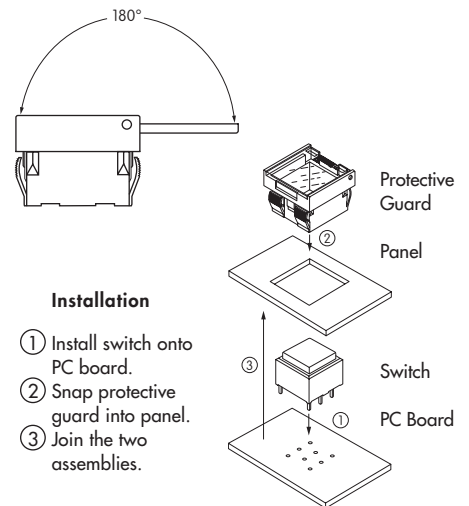

Spring Loaded Protective Guard for Rectangular Snap-in Model

AT4172 Rectangular Protective Guard

Opens 180°
Closes automatically

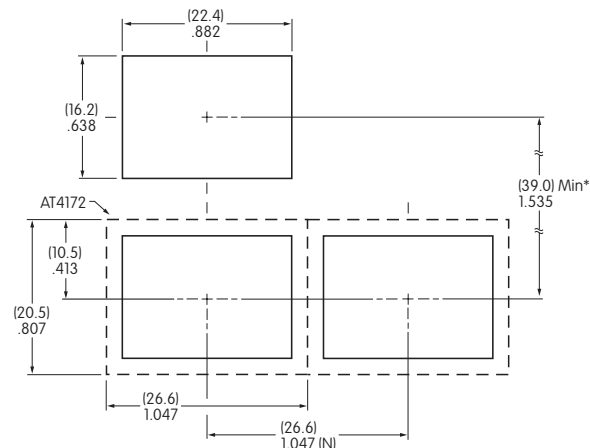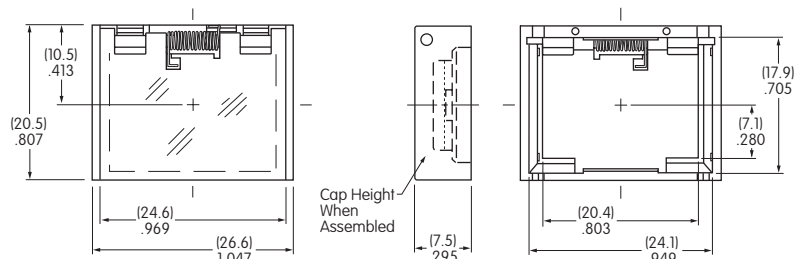


(N) = Number of switches * Minimum dimension allows opening of cover to 180°

Materials:


Cover: Clear Polycarbonate
Base: Black GFR Polyamide
Coil Spring: Stainless Steel

Recommended Panel Thickness:
.039" ~ .106" (1.0mm ~ 2.7mm)




OPTIONAL ACCESSORIES

AT4001
Square




Only for use with KK mounting type

AT4011
Rectangular



Only for use with NK mounting type

Dust Covers

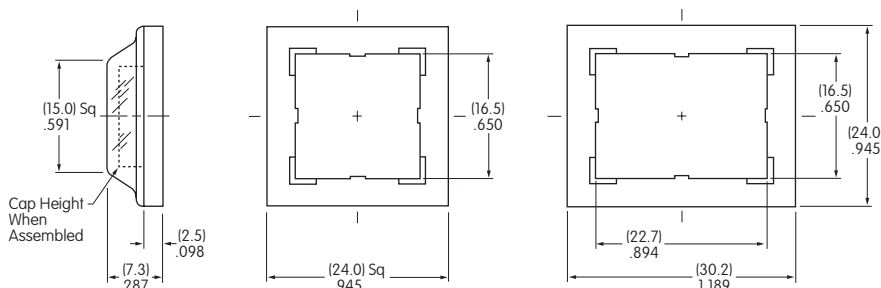

Materials:

PVC with polyethylene gasket
(PVC loses pliability below 0°C (32°F).)

Recommended Panel Thickness: .039" ~ .098" (1.0mm ~ 2.5mm)

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.


Suggested Printable Area for UB Lens & Film Insert

Recommended Methods: Laser Etch on clear lens, Screen Print or Pad Print on lens;
Laser Print on film insert.

Square Cap





Rectangular Cap





Shaded areas are printable areas.

Lens



Film Insert



Film Insert: Clear Polyester 0.15mm max. thickness

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 5A @ 125/250V AC or 5A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary;
 200,000 operations minimum for alternate action
Electrical Life: 10,000 operations minimum for silver;
 200,000 operations minimum for gold
Nominal Operating Force: Single Pole: 1.90N
 Double Pole: 2.55N
Contact Timing: Break before make
Travel: Pretravel .067" (1.7mm); Overtravel .024" (0.6mm); Total Travel .091" (2.3mm)

Materials & Finishes

Housing/Bezel: Glass fiber reinforced polyamide (UL94V-0)
Snap-in Frame: Stainless steel
Movable Contactor: Phosphor bronze
Movable Contacts: Silver alloy or copper with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Switch Terminals: Phosphor bronze with silver or gold plating
Lamp Terminals: Brass with tin plating
Base: Glass fiber reinforced liquid crystal polymer (UL94V-0)

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 15.0N maximum downward force on cap

Processing

Soldering: Wave Soldering (PC version): See Profile A in Supplement section.
 Manual Soldering: See Profile A in Supplement section.
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards: UL94V-0 housing/bezel & base
UL: File No. E44145 - Recognized only when ordered with marking on switch.
 Add "/U" or "/CUL" before dash in part number to order UL recognized switch.
 UL recognized only when ordered switch body with cap assembled.
 All single & double pole models recognized at 5A @ 125/250V AC or 0.014A @ 28V DC.

Distinctive Characteristics

Wide selection of illumination effects is achieved with single and bicolor, 1- or 6-element LEDs in flat, beveled, or sculptured caps.

Alternating legends in choice of sculptured or flat caps, combined with super bright bicolor LED.

Combination of PCB mountability and short body allows use in compact applications.

Small behind panel dimension for snap-in mounting in tight spaces.


Snap-acting contact mechanism provides sensitive actuation with audible feedback; quick-make, quick-break characteristic limits arcing and prolongs electrical life.

Latchdown mechanism, independent of switching mechanism, gives outstanding stability and reliability plus visible and tactile indication of circuit status.


Terminals are epoxy sealed to lock out flux, solvents, and other contaminants.

Momentary and alternate action circuits available in the same space-saving body size.

Matching indicators available.

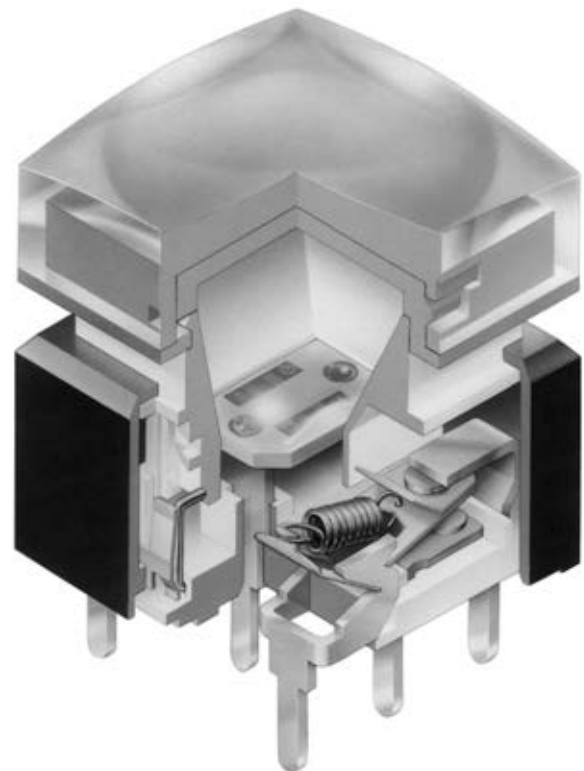

Actual Size



Toggles

Rockers

Pushbuttons

D Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

TYPICAL SWITCH

UB2

1

5

SK

G

03

Poles

1	SPDT
2	DPDT

Circuits

5	ON	(ON)
() = Momentary		
6	ON	ON
Alternate Action with Latchdown		

Mounting Types

PCB Mounting

SK	Square
* Snap-in Mounting	
KK	Square
* Standard with Solder Lug terminals	

Terminals

01	Solder Lug (for Snap-in Mounting)
03	Straight PC

Contacts & Ratings

W	Silver Rated 5A @ 125/250V AC
G	Gold Rated 0.4VA max @ 28V AC/DC max

Part Numbers for Alternating Legends

Color	15mm Square Sculptured Cap	15mm Square Flat Cap
	Part Number	Part Number
Red/Green	AT3069JCF11 ~ AT3069JCF14	AT3070JCF11 ~ AT3070JCF14
Amber/Blue	AT3069JDG11 ~ AT3069JDG14	AT3070JDG11 ~ AT3070JDG14

Refer to Ordering Table for Alternating Legend that corresponds with last 2 digits of part number.

IMPORTANT:



Switches are supplied without UL & cULus marking unless specified. **UL & cULus recognized only when ordered with marking on switch.** Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

UB215SKG035C-1JC



ORDERING EXAMPLE

5C

1JC



LEDS

Bright LED

5C	Red
5D	Amber
5F	Green

Super Bright LED

6B	White
6F	Green
6G	Blue

Super Bright Bicolor LED

6CF	Red/Green
6DG	Amber/Blue

Nonilluminated

N	Nonilluminated
---	----------------

Cap Types & Colors

Sculptured Cap Lens/Diffuser Colors

1JB	Clear/White
1JC	Clear/Red
1JD	Clear/Amber
1JF	Clear/Green

Beveled Cap & Colors

2B	White
2C	Red
2D	Amber
2F	Green

Flat Cap Lens/Diffuser Colors

3JB	Clear/White
3JC	Clear/Red
3JD	Clear/Amber
3JF	Clear/Green

Sculptured Cap Lens/Diffuser Color

1JB	Clear/White
-----	-------------

Beveled Cap & Color

2B	White
----	-------

Flat Cap Lens/Diffuser Color

3JB	Clear/White
-----	-------------

Sculptured Cap Lens/Diffuser Color

1JB	Clear/White
-----	-------------

Beveled Cap & Color

2B	White
----	-------

Flat Cap Lens/Diffuser Color

3JB	Clear/White
-----	-------------

Sculptured Cap with Alternating Legend

4JCF	Clear; Red/Green
4JDG	Clear; Amber/Blue

Flat Cap with Alternating Legend

5JCF	Clear; Red/Green
5JDG	Clear; Amber/Blue

Sculptured Cap Lens/Insert Colors

4JA	Clear/Black	4JD	Clear/Amber
4JB	Clear/White	4JF	Clear/Green
4JC	Clear/Red		

Beveled Cap & Colors

5A	Black	5D	Amber
5B	White	5F	Green
5C	Red		









Alternating Legends

11	ON (pos)	OFF (pos)
12	ON (neg)	OFF (neg)
13	START	STOP
14	OPEN	CLOSE

See Part Numbers Table on Previous Page.

Contact factory for custom options.

POLES & CIRCUITS

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal 	Down 	Normal 	Down 	
SP	UB215 *UB216	ON ON	(ON) ON	1-3	1-2	SPDT  
DP	UB225 *UB226	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT  

* When in latchdown position for the alternate circuit, cap positions above the housing are:
.059" (1.5mm) for snap-in models & .276" (7.0mm) for PCB models.

MOUNTING TYPES & SHAPES

PCB Mounting

SK






Square

SP, Single Color LED

DP, Single Color LED

SP, Bicolor LED



DP, Bicolor LED



Snap-in Mounting (Solder Lug)

KK

Square
with Built-in Bezel



Panel Thickness:
.039 ~ .126"
(1.0 ~ 3.2mm)

CONTACT MATERIALS & RATINGS

W

Silver Contacts

Power Level

5A @ 125V AC & 250V AC

G

Gold Contacts

Logic Level

0.4VA maximum @ 28V AC/DC maximum

Complete explanation of operating range in Supplement section.

SWITCH & LAMP TERMINALS

01

Solder Lug

For Switch &
Bright LED





For Super Bright
& Bicolor LED

03

Straight PC

For Switch &
Bright LED

For Super Bright
& Bicolor LED



BRIGHT LED & CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires an external power source. Polarity marks are on the bottom of the switch.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.
The LED is an integral part of the switch and not available separately.




Electrical Specifications for Bright LED

		5C	5D	5F	
	Color	Red	Amber	Green	Unit
Maximum Forward Current	I _{FM}	30	30	25	mA
Typical Forward Current	I _F	20	20	20	mA
Forward Voltage	V _F	1.85	2.0	2.1	V
Maximum Reverse Voltage	V _{RM}	5	5	5	V
Current Reduction Rate Above 25°C	ΔI _F	0.40	0.42	0.46	mA/°C
Ambient Temperature Range		-25° ~ +50°			°C

Bright Single Color LED with 1 element



Caps for Bright LED

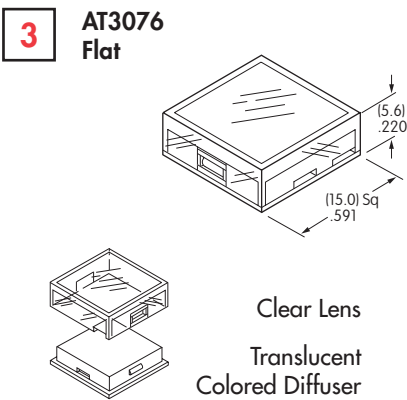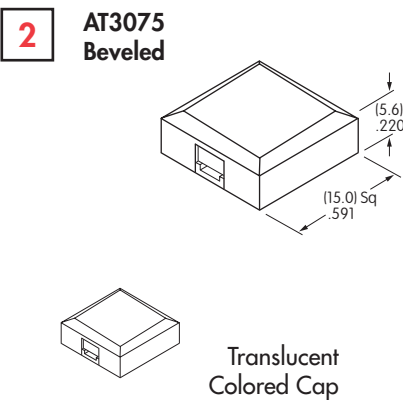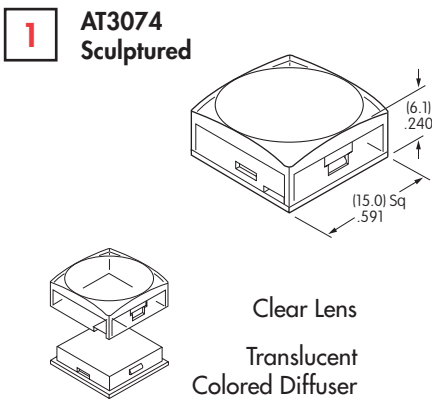

Lens/Diffuser Colors Available:

- JB** Clear/White
- JC** Clear/Red
- JD** Clear/Amber
- JF** Clear/Green

Cap Colors Available:

- B** White
- C** Red
- D** Amber
- F** Green

Lens/Diffuser Colors Available:


- JB** Clear/White
- JC** Clear/Red
- JD** Clear/Amber
- JF** Clear/Green

Material: Polycarbonate Finish: Glossy

SUPER BRIGHT LEDS & CAPS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. Polarity marks are on the bottom of the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section. The LED is an integral part of the switch and not available separately.

Electrical Specifications for Super Bright LEDs

Super Bright LEDs are Electrostatic Sensitive		Color	6B White	6F Green	6G Blue	Unit
Maximum Forward Current		I_{FM}	20	30	30	mA
Typical Forward Current		I_F	15	20	20	mA
Forward Voltage		V_F	3.3	3.5	3.6	V
Maximum Reverse Voltage		V_{RM}	5	5	5	V
Current Reduction Rate Above 25°C		ΔI_F	0.25	0.50	0.50	mA/°C
Ambient Temperature Range			-20° ~ +50°			°C


Super Bright Single Color LED with 1 element



Caps for Super Bright LED

1JB


AT3074JB
Sculptured
Clear Lens/
White Diffuser



Clear Lens
Translucent
White Diffuser

2B


AT3075B
Beveled
White Cap



Translucent
White Cap

3JB

AT3076JB
Flat
Clear Lens/
White Diffuser



Clear Lens
Translucent
White Diffuser


Material: Polycarbonate

Finish: Glossy


SUPER BRIGHT BICOLOR LEDS & CAPS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. Polarity marks are on the bottom of the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section. The LED is an integral part of the switch and not available separately.

Electrical Specifications for Super Bright Bicolor LEDs

Super Bright LEDs are Electrostatic Sensitive		Color	6CF Red	6CF Green	6DG Amber	6DG Blue	Unit
Maximum Forward Current		I_{FM}	30 * 25 for Amber	25 * 22 for Amber	30	30	mA
Typical Forward Current		I_F	20	20	15	15	mA
Forward Voltage		V_F	2.1	3.5	2.0	2.8	V
Maximum Reverse Voltage		V_{RM}	4	4	4	4	V
Current Reduction Rate Above 25°C		ΔI_F	0.40	0.33	0.33	0.33	mA/°C
Ambient Temperature Range			-20° ~ +50°		-20° ~ +50°		°C


Super Bright Bicolor
LED with 2 elements




* Amber color is achieved by lighting red and green simultaneously, but is not suitable for Alternating Legends.

Caps for Super Bright Bicolor LED


1JB AT3074JB Sculptured
Clear Lens/White Diffuser

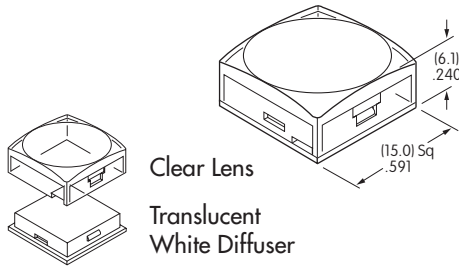

2B AT3075B Beveled
White Cap

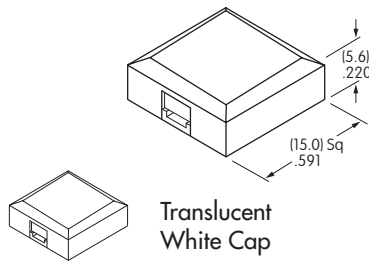

3JB AT3076JB Flat
Clear Lens/White Diffuser

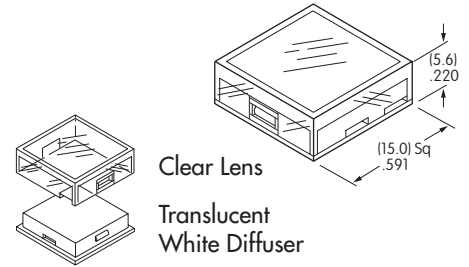


Material: Polycarbonate Finish: Glossy

Alternating Legend Caps for Super Bright Bicolor LED


AT3069J Sculptured Cap
with Alternating Legend

4JCF Red/Green
4JDG Amber/Blue



AT3070J Flat Cap with
Alternating Legend

5JCF Red/Green
5JDG Amber/Blue



Material: Polycarbonate Finish: Glossy

Standard Alternating Legend Pairs



Cap illumination is alternating Green/Red or Blue/Amber; legend text is black.
Contact factory for other Alternating Legends.
Legend illustrations are approximate representations of the actual characters on the filters.


No Code No Lamp

CAP TYPES & COLOR COMBINATIONS FOR NONILLUMINATED

4 AT3073 Sculptured

Lens/Insert
Colors Available:

JA Clear/Black
JB Clear/White
JC Clear/Red
JD Clear/Amber
JF Clear/Green

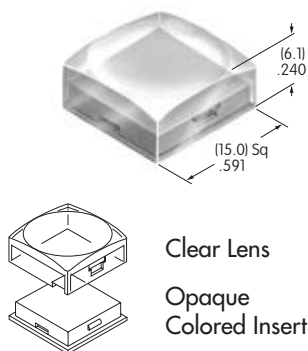


Material: Polycarbonate
Finish: Glossy

5 AT3077 Beveled

Cap
Colors Available:


A Black
B White
C Red
D Amber
F Green

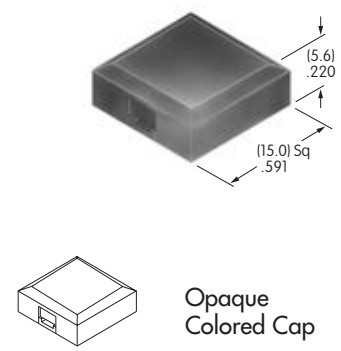


Material: Polycarbonate
Finish: Glossy

TYPICAL SWITCH DIMENSIONS


Bright & Super Bright LED Straight PC

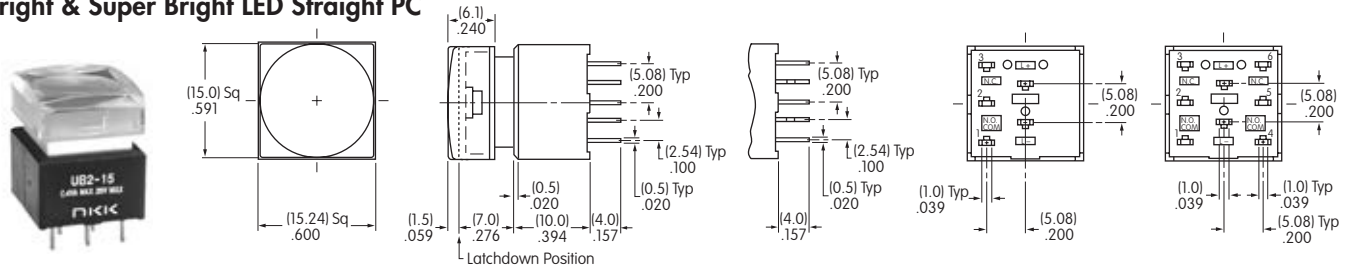


Bicolor LED Straight PC

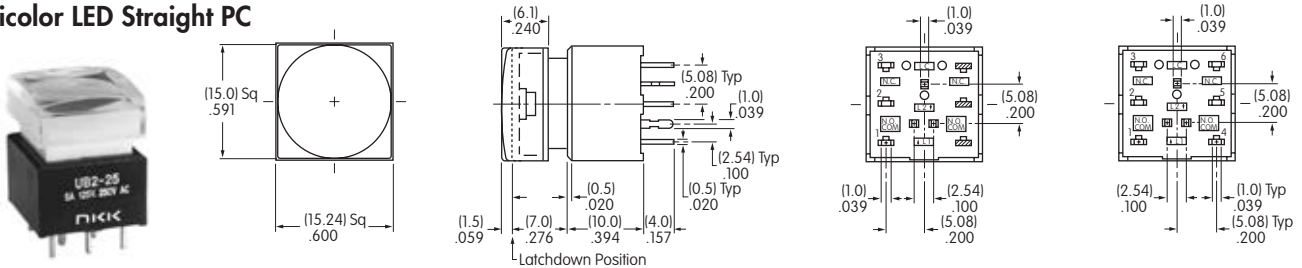


Bright LED Solder Lug

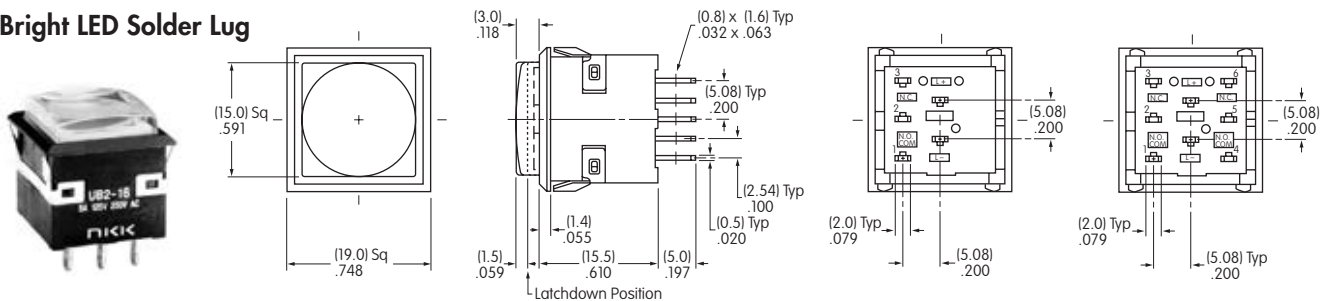

Super Bright LED Solder Lug

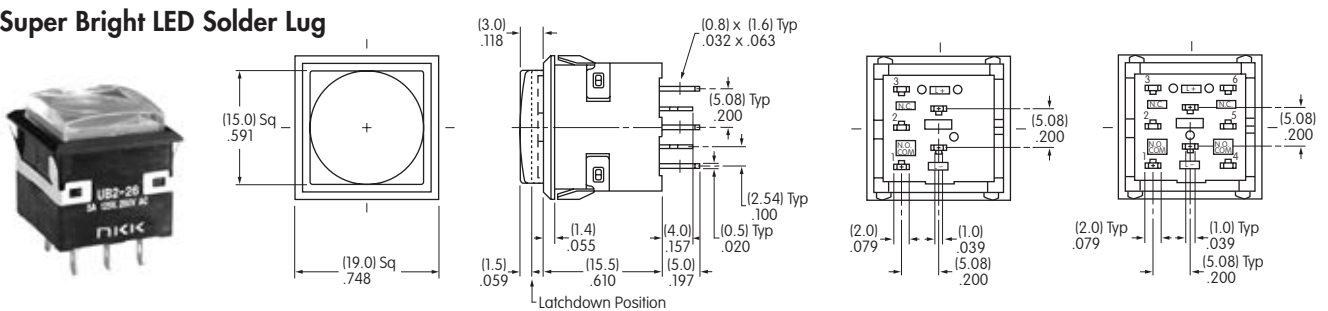

Bicolor LED Solder Lug

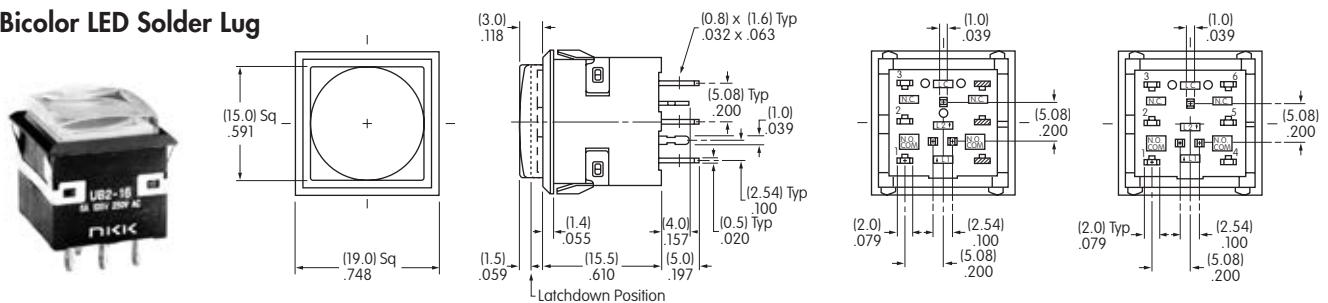

OPTIONAL ACCESSORIES

Protective Guard for Snap-in Model

AT4141

Opens 90°
Closes manually




Materials:

Cover: Clear Polycarbonate
Base: Black GFR Polyamide

Recommended Panel Thickness:

.039" ~ .106" (1.0mm ~ 2.7mm)

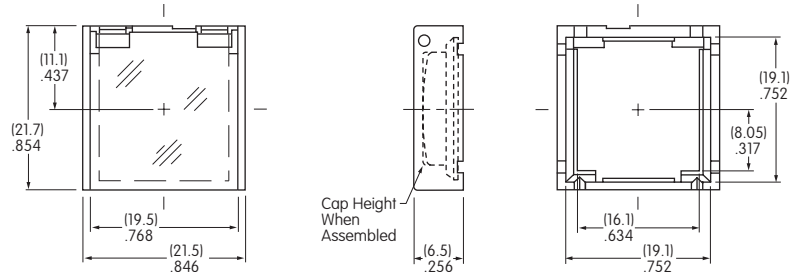

Spring Loaded Protective Guard for Snap-in Mounting of PCB Model


AT4170

Opens 180°
Closes automatically



Materials:

Cover: Clear Polycarbonate
Base: Black Polyamide
Coil Spring: Stainless Steel

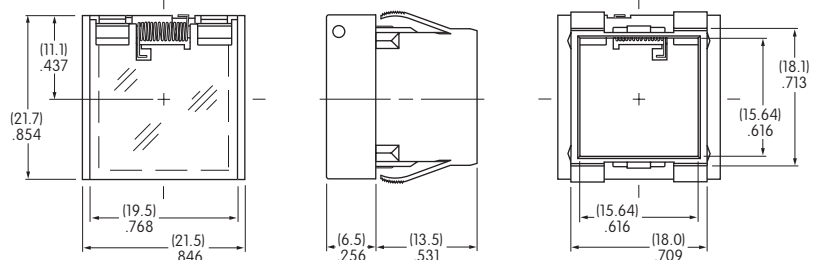


Recommended Panel Thickness:

.039" ~ .126"
(1.0mm ~ 3.2mm)



Recommended Panel-to-PCB Range:

.531" (13.5mm)

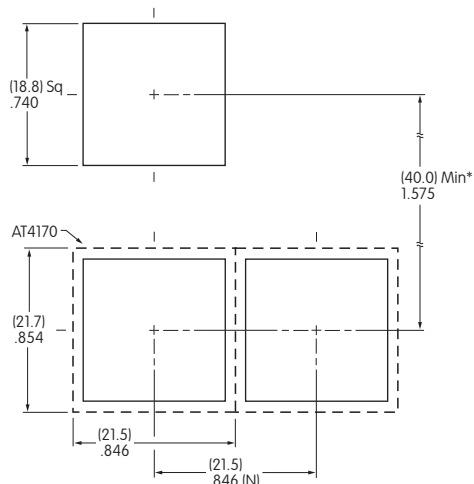


(N) = Number of switches

* Minimum dimension allows opening of cover to 180°



Installation

- ① Install switch onto PC board.
- ② Snap protective guard into panel.
- ③ Join the two assemblies.

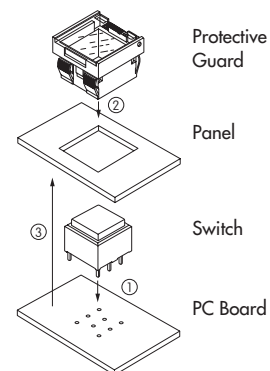

OPTIONAL ACCESSORIES

Spring Loaded Protective Guard for Snap-in Model

AT4142

Opens 180°
Closes automatically




Materials:

Cover: Clear Polycarbonate
Base: Black GFR Polyamide
Coil Spring: Stainless Steel

Recommended Panel Thickness:

.039" ~ .106" (1.0mm ~ 2.7mm)


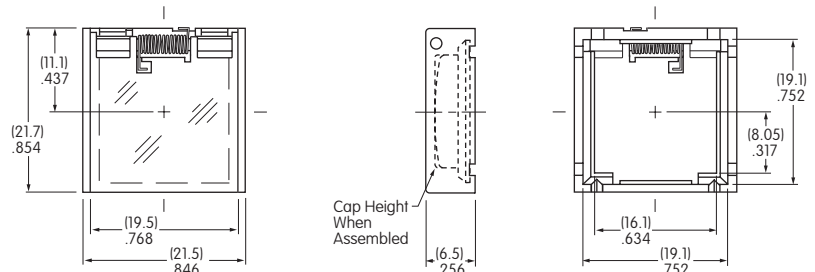


Dust Cover

AT4145 Not for use with barriers.

Materials:

Lid: Clear PVC
Operating temperature range:
0°C ~ +70°C (32°F ~ 158°C).
Gasket: Polyethylene

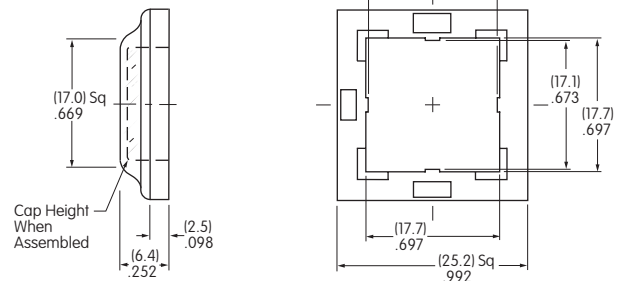




Recommended Panel Thickness

.039" ~ .098" (1.0mm ~ 2.5mm)

Barriers for Snap-in Mount

AT4143 End

AT4144 Center



Cutouts for more than 1 Switch:

A = .799" (20.3mm) x Number of Switches +
.063" (1.6mm)

Material: Polyamide

LEGENDS



NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for UB2 Lens, Film Insert or Diffuser


Recommended Methods: Laser Etch on clear lens, Screen Print or Pad Print on lens;
Laser Print on film insert.

Shaded areas are printable areas.



Beveled Cap




Flat Cap




Film Insert or Diffuser



Sculptured Cap



Film Insert or Diffuser



Film Insert: Clear Polyester 4 mil maximum thickness

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary circuit
 200,000 operations minimum for maintained circuit
Electrical Life: 100,000 operations minimum
Nominal Operating Force: Single pole: 1.47N for nonsealed; 1.67N for sealed
 Double pole: 2.75N for nonsealed; 2.94N for sealed
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing/Bezel: Glass fiber reinforced polyamide (UL94V-0)
Snap-in Frame: Stainless steel
Base: Glass fiber reinforced polyamide (UL94V-0)
Movable Contactor: Phosphor bronze with silver or gold plating
Movable Contacts: Silver alloy with silver plating or brass with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Switch Terminals: Phosphor bronze with tin plating
Lamp Terminals: Phosphor bronze with tin plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing: IP65 of IEC60529 standard for panel seal models

Installation

Mounting Torque: 0.785Nm (6.95 lb•in) maximum
Quick Connect Force: 24.5N maximum downward force on connector
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing & base
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.
 All solder lug models recognized at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.
CSA: **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
 Add "/C" before first dash in part number to order CSA certified switch.
 All solder lug models certified at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.

Distinctive Characteristics

Full face or spot illumination with incandescent lamps or multi-element LEDs, with or without resistors.

Choice of super bright LEDs in white, green, and blue as well as bright LEDs in red, amber, and green.

Combination bezel-barrier is an integral part of the switch and prevents accidental actuation.

Unique thermoplastic elastomer seal inside caps plus rolled sleeve of nitrile butadiene rubber at joining of housing and inner case, all for added protection to interior mechanism.

Dust and oil tight as well as splashproof panel seal models qualify to IP65 of IEC60529 Standards (similar to NEMA 4 and 13). Panel seal models provided with exterior o-ring.


Distinctive design of snap-action contacts for shock resistance, long life, and sensitive actuation.

High density design to give behind panel depth of less than one inch.


Terminals are epoxy sealed to lock out flux, dust, solvents, and other contaminants.

Latchdown for indication of circuit status, plus audible, tactile feedback with smooth, responsive operation.


Matching indicators available.

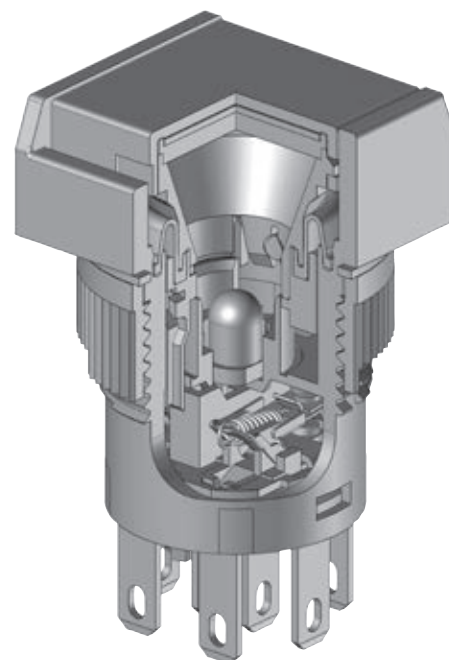

Actual Size

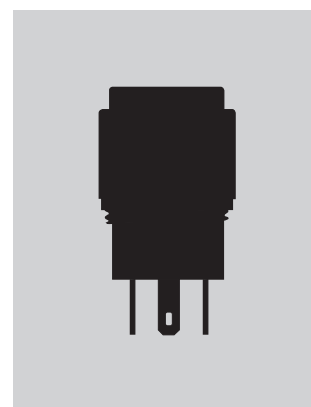

TYPICAL SWITCH

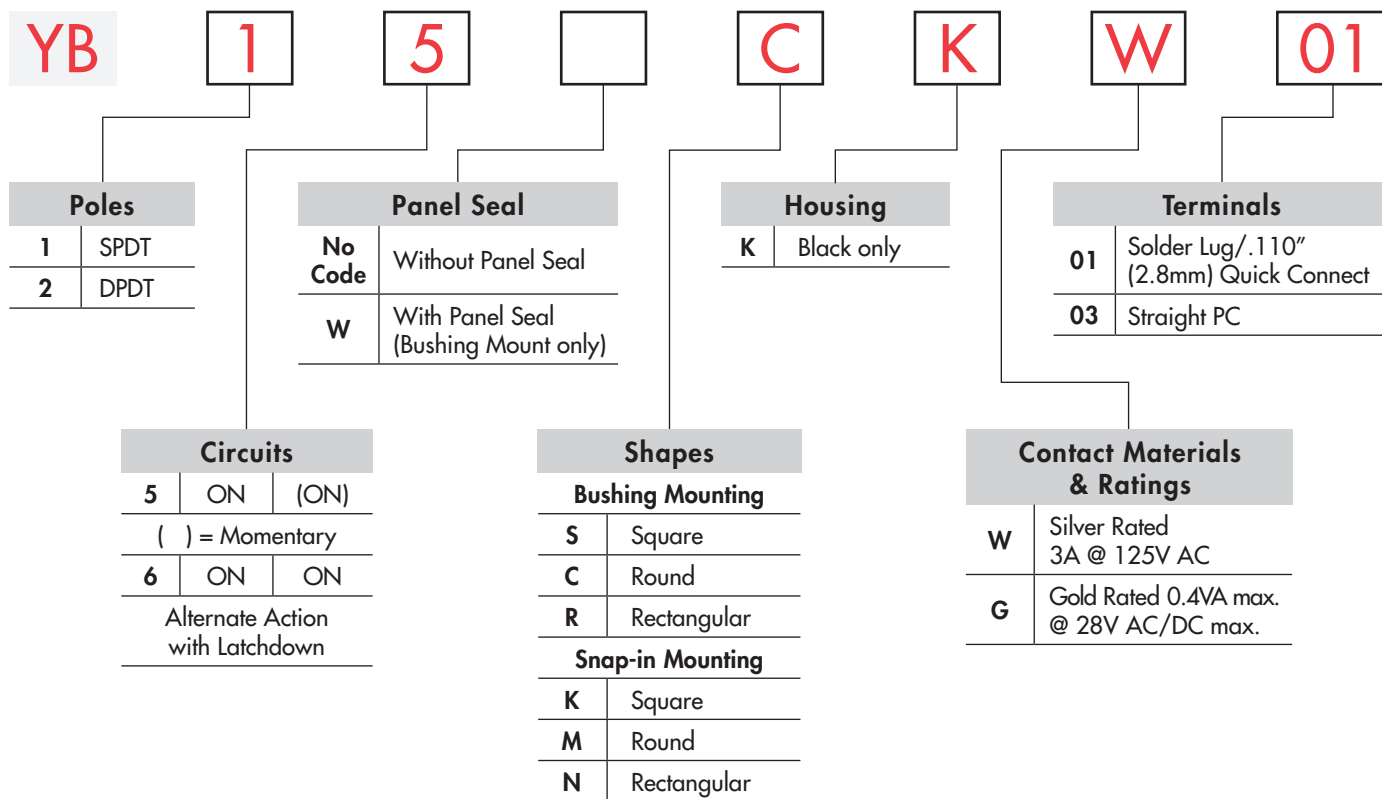


IMPORTANT:



Switches are supplied without UL & cULus marking unless specified.
UL & cULus recognized only when ordered with marking on switch.
 Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

YB15CKW01-6F-JB

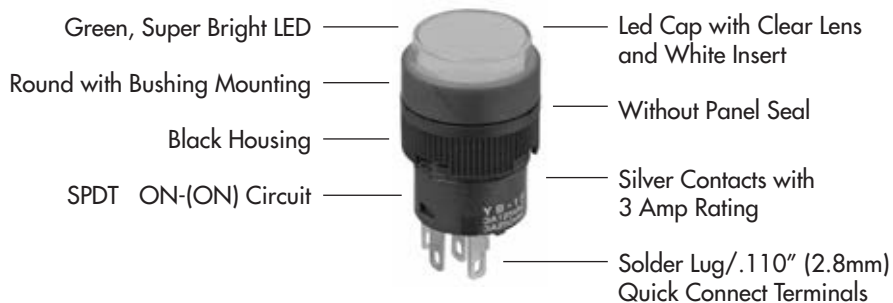

ORDERING EXAMPLE

6 F

Lamps

Incandescent Lamp

05	5-volt
12	12-volt
No Code	Nonilluminated

LED for Spot Illuminated Cap

LED Colors		Forward Voltage	
1C	Red	02	2-volt (no resistor)
1D	Amber	05	5-volt
1F	Green	12	12-volt
1CF	Red/Green	24	24-volt

Bright LED

LED Colors		Resistor	
5C	Red	No Code	No Resistor
5D	Amber	05	5-volt
		12	12-volt
5F	Green	24	24-volt

Super Bright LED

6B	White
6F	Green
6G	Blue

Bicolor LED for Full Face Illuminated

LED Colors		Forward Voltage	
2CF	Red/Green	02	2-volt (no resistor)
		05	5-volt
		12	12-volt
		24	24-volt

JB

Cap Types & Colors

Solid Cap: Lens/Insert Colors

BB	White/White
CB	Red/White
EB	Yellow/White
FB	Green/White
GB	Blue/White

Spot Illuminated Cap: Lens/Insert Colors

JA	Clear/Black
JB	Clear/White
JC	Clear/Red
JE	Clear/Yellow
JF	Clear/Green

LED Cap: Lens/Insert Colors

JB	Clear/White
JC	Clear/Red
JD	Clear/Amber
JF	Clear/Green







LED Cap: Lens/Insert Colors

JB	Clear/White
-----------	-------------

LED Cap: Lens/Insert Colors

JB	Clear/White
-----------	-------------

POLES & CIRCUITS

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal 	Down 	Normal 	Down 	
SP	YB15 *YB16	ON ON	(ON) ON	1-3	1-2	SPDT 
DP	YB25 *YB26	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT 


* When in latchdown position for the alternate circuit, cap position is .020" (0.5mm) above the built-in bezel.

PANEL SEAL

No Code


Without Panel Seal

Bushing
Mounting



Supplied with
mounting nut.


Snap-in
Mounting



W

With Panel Seal

Bushing
Mounting
only



Supplied with
mounting nut
and o-ring AT089.

SHAPES & MOUNTING TYPES

Bushing Mounting

Snap-in Mounting

S

Square

C

Round

R

Rectangular

K







Square

M

Round

N

Rectangular



Bezel-barrier is an integral part of the switch body.

HOUSING

K

Black

Housing available in black only. The 1-piece body and bezel-barrier have a matte finish.

CONTACT MATERIALS & RATINGS

W

Silver Contacts

Power Level

3A @ 125/250V AC

G

Gold Contacts


Logic Level

0.4VA max. @ 28V AC/DC max.


Complete explanation of operating range in Supplement section.

TERMINALS


01 Solder Lug/
.110" (2.8mm) Quick Connect




03 Straight PC



Single Pole




Double Pole



INCANDESCENT LAMP & SOLID CAP

Electrical specifications are determined at a basic temperature of 25°C. Lamp circuit is independent of switch operation. For dimension drawing of lamp see the Accessories & Hardware section.

<div>AT611</div> <div></div> <div>T-1 Bi-pin</div>		<div>05</div>	<div>12</div>	
	Voltage	V	5V AC	12V AC
	Current	I	115mA	60mA
	MSCP		.150	.150
	Endurance	Hours	7,000 average	
	Ambient Temperature Range		-25°C ~ +50°C	


No Code No Lamp

Solid Cap for Incandescent Lamp & Nonilluminated


Lens/Insert
Colors Available:

- BB** White/White
- CB** Red/White
- EB** Yellow/White
- FB** Green/White
- GB** Blue/White


AT3001
Square







AT3002
Round



AT3003
Rectangular

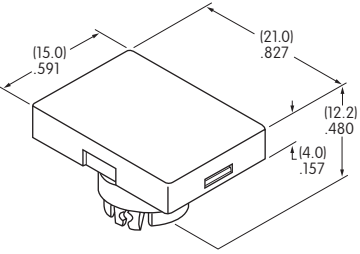


-  Translucent Colored Lens
-  Translucent White Insert
-  Translucent White Seal/Filter
-  Incandescent Lamp AT611

Materials:
Lens & Insert: Polycarbonate Seal/Filter: Thermoplastic Elastomer


SPOT ILLUMINATED CAP WITH BUILT-IN LED

This spot-illuminated cap is factory assembled.


AT3010
Square



AT3011
Round




AT3012
Rectangular

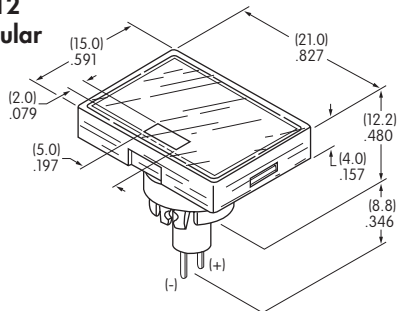


Colors Available:		02	02	05	12	24	Unit
1C	1D	1F	1CF	Without Resistor Red or Amber	Without Resistor Green or Red/Green	With Resistor All Colors	
Red	Amber	Green	Red/Green				
Maximum Forward Current		I _{FM}	20	20	15	15	mA
Typical Forward Current		I _F	15	15	12.5	12.5	mA
Forward Voltage		V _F	1.9	2.1	5	12	V
Maximum Reverse Voltage (not applicable to bicolor)		V _{RM}	5	5	5	5	V
Current Reduction Rate Above 25°C		ΔI _F	0.27	0.27	—	—	mA/°C
Ambient Temperature Range			-25 ~ +50				°C

Without Resistor 2-volt

With Resistor 5, 12, 24-volt




Single Color



Bicolor



Single Color



Bicolor

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Single color LEDs are colored in OFF state. Bicolor LED is translucent white in OFF state.

If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

Lens/Insert
Colors Available:


JA Clear/Black

JB Clear/White

JC Clear/Red

JE Clear/Yellow

JF Clear/Green




Clear Lens



Colored Insert



Seal



Built-in LED
(integral part
of the cap)

Example part number
when cap is ordered separate
from switch:

AT3010F02JA

for a

Square Spot Illuminated Cap
with Green 2-volt LED
without resistor
Clear Lens and Black Insert


Materials:

Lens & Insert: Polycarbonate
Seal: Thermoplastic Elastomer


BRIGHT LED & LED CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.


Electrical Specifications for Bright LED without Resistor

Bright AT628 	Colors Available:	5C Red	5D Amber	5F Green	No Code No Resistor	Unit
	LED Colors	Red	Amber	Green		
	Maximum Forward Current	I_{FM}	40	40	40	mA
	Typical Forward Current	I_F	26	26	26	mA
	Forward Voltage	V_F	1.9	2.0	2.0	V
	Maximum Reverse Voltage	V_{RM}	4	4	4	V
	Current Reduction Rate Above 25°C	ΔI_F	0.50			mA/°C
	Ambient Temperature Range	-25 ~ +50				°C

Electrical Specifications for Bright LED with Resistor

Bright AT634 	Colors Available:	5C Red	5D Amber	5F Green	05	12	24	Unit
	Maximum Forward Current	I_{FM}	—	—	—	—	—	mA
	Typical Forward Current	I_F	25	20	10	—	—	mA
	Forward Voltage	V_F	5	12	24	—	—	V
	Maximum Reverse Voltage	V_{RM}	4	8	16	—	—	V
	Current Reduction Rate Above 25°C	ΔI_F	—	—	—	—	—	mA/°C
	Ambient Temperature Range	-25 ~ +50						°C


AT634
5-volt,
2-element
with Resistor



AT634
12-volt,
4-element
with Resistor



AT634
24-volt,
4-element
with Resistor




Cap for Bright LED


Lens/Insert
Colors Available:

- JB** Clear/White
- JC** Clear/Red
- JD** Clear/Amber
- JF** Clear/Green



AT3004 Square




AT3005 Round




AT3006 Rectangular

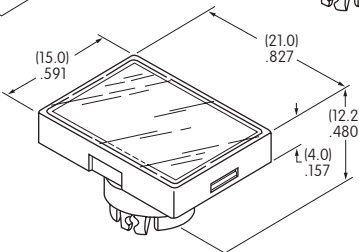

Transparent Clear Lens



Translucent Colored Insert



Translucent White Seal/Diffuser






Bright LEDs
AT628 AT634

Materials:
Lens & Insert: Polycarbonate Seal/Diffuser: Thermoplastic Elastomer

SUPER BRIGHT LED & LED CAPS


The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

Electrical Specifications for Super Bright LED


<div>Super Bright AT625G Blue AT631B White AT632F Green</div> <div></div> <div>T-1 Bi-pin</div>	<div></div> <div></div> <div>Colors:</div>	<div><div>6B</div><div>White</div></div>	<div><div>6F</div><div>Green</div></div>	<div><div>6G</div><div>Blue</div></div>	Unit	
	Maximum Forward Current	I_{FM}	30	30	30	mA
	Typical Forward Current	I_F	20	20	20	mA
	Forward Voltage	V_F	3.3	3.3	3.3	V
	Maximum Reverse Voltage	V_{RM}	7	7	7	V
	Current Reduction Rate Above 25°C	ΔI_F	0.40	0.40	0.40	mA/°C
	Ambient Temperature Range		-25 ~ +50			°C

Cap for Super Bright LED


AT3014
Square



AT3015
Round



AT3016
Rectangular

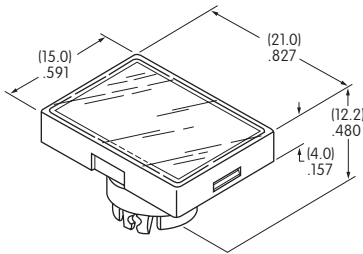


Lens/Insert
Colors Available:

JB

 Clear/White

Materials:
Lens & Insert: Polycarbonate Seal/Diffuser: Thermoplastic Elastomer

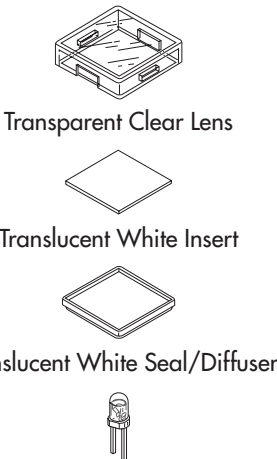


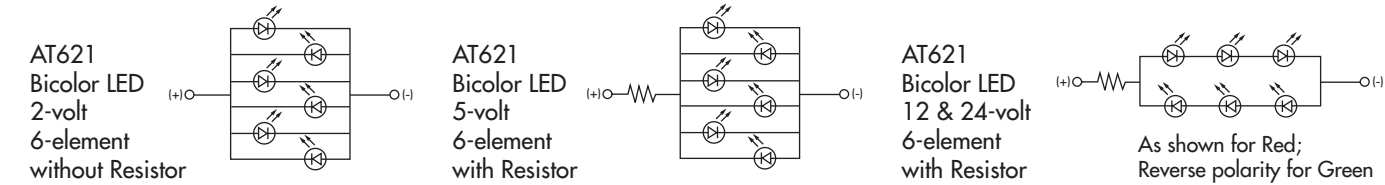
Super Bright LEDs
AT625 AT631
AT632

BICOLOR LED & LED CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.


Electrical Specifications for Bicolor LED

Bicolor AT621 <div><div>2CF</div>Red/Green</div>  T-1 1/2 Bi-pin	Bicolor LED is translucent white in OFF state.	02	05	12	24	Unit
	Maximum Forward Current I_{FM}	60	60	20	12	mA
	Typical Forward Current I_F	45	45	15	10	mA
	Forward Voltage (Red/Green) V_F	1.9 / 2.1	5	12	24	V
	Current Reduction Rate Above 25°C ΔI_F	0.80	—	—	—	mA/°C
	Ambient Temperature Range	-25 ~ +50				°C




LED Caps


AT3004 Square



AT3005 Round




AT3006 Rectangular

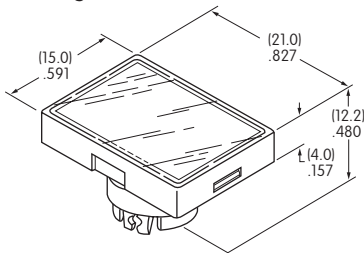

Lens/Insert
Colors Available:

JB Clear/White

Transparent Clear Lens



Transparent White Insert



Translucent White Seal/Diffuser



Materials:




Lens & Insert: Polycarbonate Seal/Diffuser: Thermoplastic Elastomer

Bicolor LED AT621

TYPICAL SWITCH DIMENSIONS

Square • Bushing Mounting

Single & Double Pole


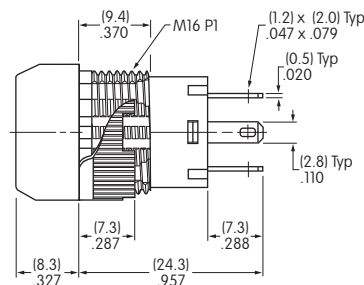



YB15SKW01-12-CB

Single pole models do not have terminals 4, 5, & 6.

Round • Panel Seal

Single & Double Pole


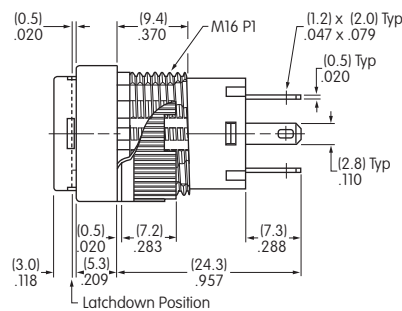



YB26WCKW01-12-EB

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Snap-in Mounting

Single & Double Pole

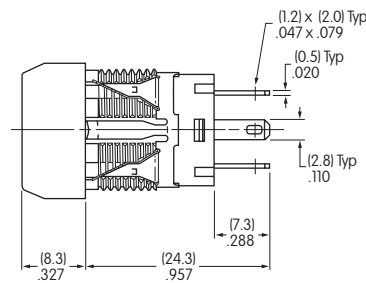


YB15NKW01-5C-JC

Single pole models do not have terminals 4, 5, & 6.

PANEL THICKNESS & CUTOUTS


Bushing & Panel Seal Mount

Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)



Snap-in Mount

Panel Thickness
.039" ~ .138"
(1.0mm ~ 3.5mm)



OPTIONAL ACCESSORIES

Dust Covers and Protective Guards reduce depth of switch behind panel by .047" (1.2mm).

Panel Thickness Range with Dust Cover or Protective Guards:


Bushing Mounting
.020" ~ .150" (0.5mm ~ 3.8mm)

Snap-in Mounting
.020" ~ .091" (0.5mm ~ 2.3mm)

Panel Seal
.020" ~ .118" (0.5mm ~ 3.0mm)



**AT4115 Dust Cover
for Snap-in or
Bushing Mount**

**AT4115 Splash Cover
and AT541 O-ring
for Bushing Mount**



Dust/Splash Cover

Splash Cover




AT4115

Materials:
Lid: Polyvinyl Chloride
Base: Polyamide
O-ring: Nitrile butadiene rubber

Snap-in Mount

Panel Seal

Note: AT089 o-ring supplied with panel seal model.






AT4072 Protective Guard
Opens 90°
Closes manually



Materials:
Lid: Polycarbonate
Base: Glass Fiber
Reinforced Polycarbonate





Protective Guard




**AT4175 Spring Loaded
Protective Guard**
Opens 180°
Closes automatically



Spring Loaded Protective Guard

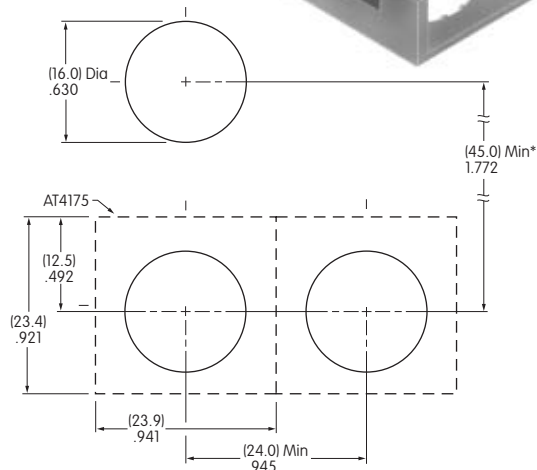

Materials:
Lid: Polycarbonate
Base: Glass Fiber Reinforced Polyamide
Coil Spring: Stainless Steel





* Minimum dimension allows opening of cover to 180°



OPTIONAL ACCESSORIES

Adaptors



AT716
Single Pole
Solder Lug/
Quick Connect
Terminals







AT717
Double Pole
Solder Lug/
Quick Connect
Terminals



AT718
Single Pole
Straight PC
Terminals



AT719
Double Pole
Straight PC
Terminals



Material: Glass fiber reinforced polyamide Note: Order adaptors separately


Switch Dimensions Shown with Adaptor AT716

Dimension A:

Solder Lug .197" (5.0mm); Straight PC .157" (4.0mm)


Panel thickness for YB Bushing Mount:

.020" ~ .197" (0.5mm ~ 5.0mm)





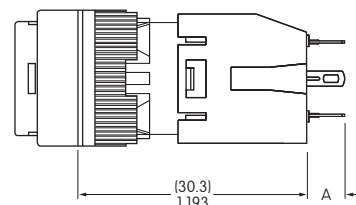


ASSEMBLY INSTRUCTIONS

Cap Assembly



LED Polarity & Orientation in Lamp Socket



Spot Illuminated Cap with Built-in LED

LED AT628 AT634

LEDs AT625G AT631B AT632F

LED AT621

Toggles
Rockers
Pushbuttons
D Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement




The following installation tools are available: AT106 Socket Wrench for bushing mounting (Overtightening the mounting nut AT092 may damage the switch housing.); AT109 Cap Extractor; AT111 Lamping Tool.
Further details and dimensions are shown in the Accessories and Hardware section.

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for YB Lens





Recommended Methods: Laser Etch on clear lens, Screen Print or Pad Print on Lens.
Epoxy based ink is recommended.



Shaded areas are printable areas.

Suggested Printable Area for Film Insert

Recommended Print Method: Laser Print
Film Insert: Clear Polyester, 4 mil max. thickness

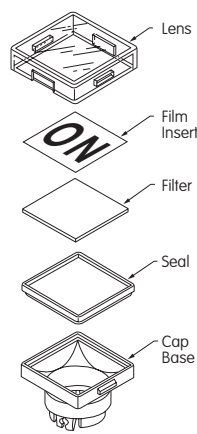

Shaded areas are printable areas.

General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Other Ratings

Contact Resistance: 50 milliohms maximum for silver; 100 milliohms maximum for gold
Insulation Resistance: 200 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 1,000,000 operations minimum for momentary circuit
 200,000 operations minimum for maintained circuit
Electrical Life: 100,000 operations minimum
Nominal Operating Force: Single pole: 1.5N
 Double pole: 3.0N
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

Materials & Finishes

Bezel: Black: Glass fiber reinforced polyamide (UL94V-0);
 Chrome plated: Chrome plating over ABS resin (UL94V-2)
Housing: Glass fiber reinforced polyamide (UL94V-0)
Base: Glass fiber reinforced polyamide (UL94V-0)
Movable Contactor: Phosphor bronze with silver or gold plating
Movable Contacts: Silver alloy or copper with gold plating
Stationary Contacts: Silver alloy or copper with gold plating
Switch Terminals: Phosphor bronze with tin plating
Lamp Terminals: Phosphor bronze with tin plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F) for Illuminated
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing: IP65 of IEC60529 standard

Installation

Mounting Torque: 0.785Nm (6.95 lb•in) maximum
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing, base & black bezel
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
 Add "/CUL" before first dash in part number to order cULus marking on switch.
 All solder lug models recognized at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.

Distinctive Characteristics

24mm square and 25mm diameter pushbuttons with the shortest above-panel dimension (1.8mm) in the industry for splashproof design.

Meets IP65 of IEC60529 standards (similar to NEMA 4 and 13), providing dust tight and splashproof panel seal protection.

Tamper resistant 18mm square and 19mm diameter actuators.

Short body of .965" (24.5mm) conserves behind-panel space.

Distinctive long stroke and light touch actuation for clear indication of circuit status.

Choice of cap colors includes clear, brushed chrome, red, green, or yellow, for enhanced panel appearance. Metallic silver cap option has bright ring illumination (round only). Unbrushed chrome has the look of stainless steel when non-illuminated, and LED color or legends when illuminated.

Brilliant illumination with multiple LED colors.

Bezel color options in black or brushed chrome.

Brushed chrome option is lighter weight than actual metal switches due to metal plating on resin.

Available in momentary and alternate action with latchdown.


Crisp actuation and clear circuit status provided by snap-action contact mechanism. Arc barrier protects against crossover.

Combination solder lug and .110" quick connect terminals. Terminals are epoxy sealed to lock out flux, dust, solvents, and other contaminants, as well as to secure terminals and improve contact stability.


Custom legends on actuator or inserts.



Actual Size (Round)

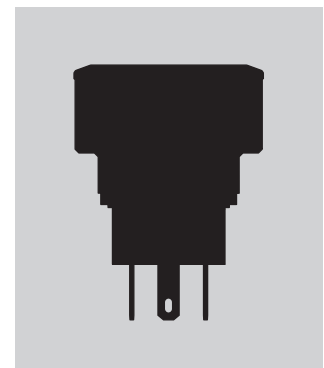

TYPICAL SWITCH

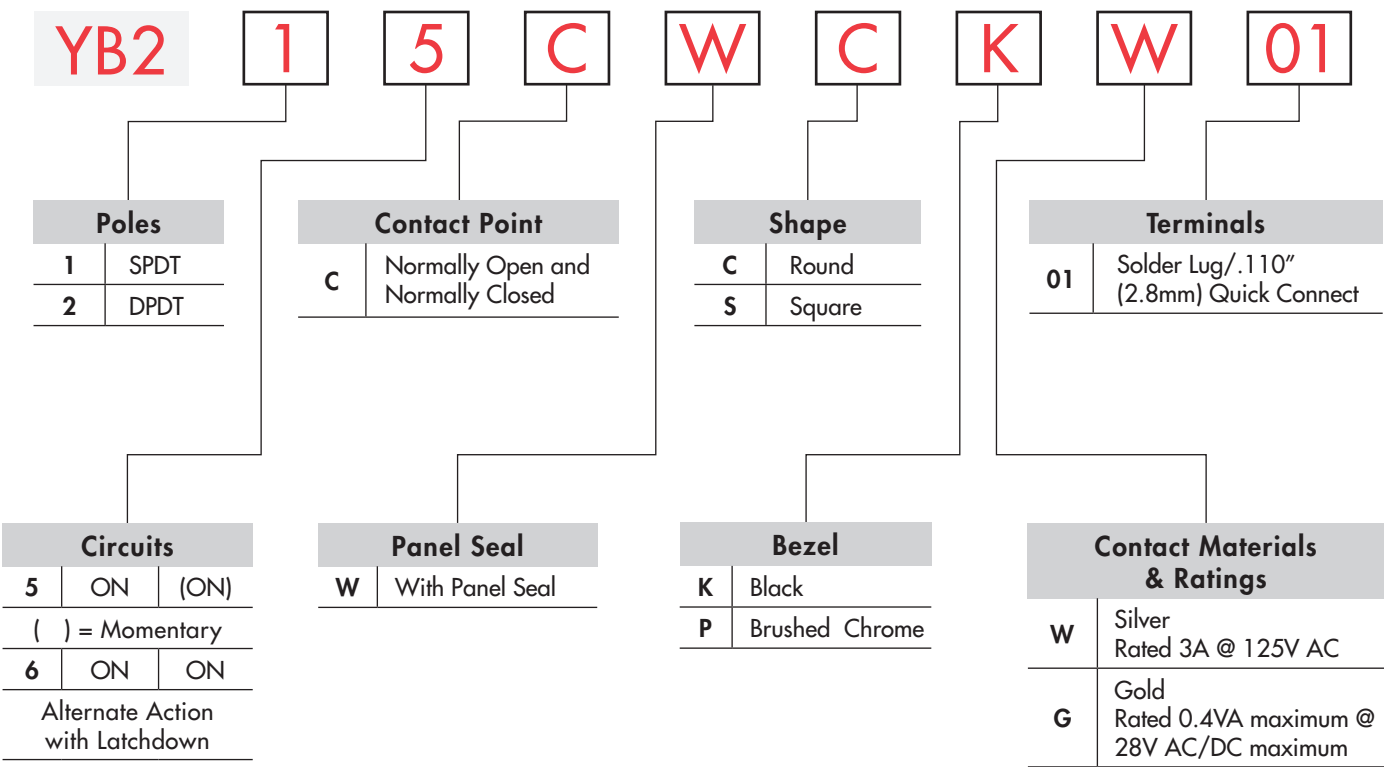

IMPORTANT:



Switches are supplied without cULus marking unless specified.
cULus recognized only when ordered with marking on the switch.
Specific models, ratings, and ordering instructions are noted on General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

YB215CWCKW01-6B-JB



ORDERING EXAMPLE

6 B

LEDS

Bright LED			
LED Colors		Resistor	
5C	Red	No Code	No Resistor (not for Green)
	5D		Amber
5F	Green	12	12-volt
		24	24-volt

JB

Cap Types & Colors

Lens/Diffuser Colors	
JB	Clear/White
JS	Metallic Silver Cap/Clear Ring (Round only)
CB	Red/White
EB	Yellow/White
FB	Green/White
HB	Unbrushed Chrome/White

LED and cap need to be the same color. Yellow cap pairs with amber LED to achieve amber illumination. Codes JB and JS (Round only) may be combined with all LED colors.

Round or Square Cap with Legend

001	
002	START
003	STANDBY
004	STOP
005	

Contact factory for custom options.

Super Bright LED

6B	White
6F	Green
6G	Blue

Lens/Diffuser Cap Colors

JB	Clear/White
JS	Metallic Silver Cap/Clear Ring (Round only)
HB	Unbrushed Chrome/White

Round or Square Cap with Legend

001	
002	START
003	STANDBY
004	STOP
005	

Contact factory for custom options.

Nonilluminated

N	No Lamp
---	---------

Cap Color

JB	Clear/White
CB	Red/White
EB	Yellow/White
FB	Green/White
HB	Unbrushed Chrome/White
P	Brushed Chrome

Part Numbers for Unbrushed Chrome Caps with Legends

Round Cap for Bright LED	Round Cap for Super Bright LED	Square Cap for Bright or Super Bright LED
AT3017HB-001	AT3018HB-001	AT3025HB-001
AT3017HB-002	AT3018HB-002	AT3025HB-002
AT3017HB-003	AT3018HB-003	AT3025HB-003
AT3017HB-004	AT3018HB-004	AT3025HB-004
AT3017HB-005	AT3018HB-005	AT3025HB-005

Refer to Ordering Table for legend that corresponds with last 3 digits of part number.

POLES & CIRCUITS

		Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
Pole	Model	Normal	Down	Normal	Down	Notes: Switch is marked with NC, NO, COM, L+, L-. Lamp circuit is isolated and requires an external power source.
SP	YB215 YB216	ON ON	(ON) ON	1-3	1-2	
DP	YB225 YB226	ON ON	(ON) ON	1-3 4-6	1-2 4-5	DPDT

CONTACT POINT

C

Normally Open and Normally Closed


Contact points are both Normally Open and Normally Closed.

PANEL SEAL

W

Panel Seal
(Round and Square)

Two o-rings provide panel seal protection meeting IP65 of IEC60529 standards.





SHAPE

C

Round

S

Square



BEZEL



K

Black

P

Brushed Chrome

For Round or Square



CONTACT MATERIALS & RATINGS

W

Silver Contacts

Power Level: 3A @ 125/250V AC

Switch base is black

G

Gold Contacts


Logic Level: 0.4VA max. @ 28V AC/DC max.

Switch base is ivory

TERMINALS

01



Solder Lug/
.110" (2.8mm) Quick Connect




BRIGHT & SUPER BRIGHT LEDS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required.
Base of AT634 and AT636 is Black for 5V, Light Blue for 12V and Gray for 24V.

Electrical Specifications for Bright LED without Resistor

Bright AT628  T-1 Bi-pin 	Colors Available:	5C Red	5D Amber	No Code No Resistor	Unit
		LED Colors		Red	Amber
	Maximum Forward Current	I_{FM}		40	mA
	Typical Forward Current	I_F		26	mA
	Forward Voltage	V_F		1.9	V
	Maximum Reverse Voltage	V_{RM}		4	V
	Current Reduction Rate Above 25°C	ΔI_F		0.50	mA/°C
	Ambient Temperature Range			-25 ~ +50	°C

Electrical Specifications for Bright Red & Amber LED with Resistor

Bright AT634  T-1 ¼ Bi-pin	Colors Available:	5C Red	5D Amber	05	12	24	Unit
	Maximum Forward Current	I_{FM}		—	—	—	mA
	Typical Forward Current	I_F		25	20	10	mA
	Forward Voltage	V_F		5	12	24	V
	Maximum Reverse Voltage	V_{RM}		4	8	16	V
	Current Reduction Rate Above 25°C	ΔI_F		—	—	—	mA/°C
	Ambient Temperature Range			-25 ~ +50			°C

AT634
5-volt,
2-element
with Resistor







AT634
12-volt,
4-element
with Resistor






AT634
24-volt,
4-element
with Resistor



Electrical Specifications for Bright Green LED with Resistor


Bright AT636  T-1 ¼ Bi-pin  5V  12V & 24V	Colors Available:	 ATTENTION ELECTROSTATIC SENSITIVE DEVICES	5F Green	05	12	24	Unit
	Maximum Forward Current	I_{FM}		—	—	—	mA
	Typical Forward Current	I_F		11	9.5	8.7	mA
	Forward Voltage	V_F		5	12	24	V
	Maximum Reverse Voltage	V_{RM}		5	5	5	V
	Current Reduction Rate Above 25°C	ΔI_F		—	—	—	mA/°C
	Ambient Temperature Range			-25 ~ +50			°C

Electrical Specifications for Super Bright LED

Super Bright AT625G Blue AT631B White AT632F Green  T-1 Bi-pin	 ATTENTION ELECTROSTATIC SENSITIVE DEVICES		Colors:	6B White	6F Green	6G Blue	Unit
	Maximum Forward Current	I_{FM}		30	30	30	mA
	Typical Forward Current	I_F		20	20	20	mA
	Forward Voltage	V_F		3.3	3.3	3.3	V
	Maximum Reverse Voltage	V_{RM}		7	7	7	V
	Current Reduction Rate Above 25°C	ΔI_F		0.40	0.40	0.40	mA/°C
	Ambient Temperature Range			-25 ~ +50			°C

BALLAST RESISTOR CALCULATION FOR LEDS

If the source voltage is greater than the rated voltage of a lamp or LED, a ballast resistor must be connected in series with the lamp. This circuit diagram and formula will assist in calculating the value of the required ballast resistor.



$$R = \frac{E - V_F}{I_F}$$


Where: R = Resistor Value (Ohms)
E = Source Voltage (V)
V_F = Forward Voltage (V)
I_F = Forward Current (A)

CAPS & CAP COLORS

AT3017 Cap for Bright LED or Nonilluminated

Lens/Diffuser Colors Available:


- JB** Clear/White
- CB** Red/White
- EB** *Yellow/White
- FB** Green/White
- HB** Unbrushed Chrome/White



AT3018 Cap for Super Bright LED

Lens/Diffuser Colors Available:

- JB** Clear/White
- HB** Unbrushed Chrome/White




Material for Lens & Diffuser: Polycarbonate
HB Lens: ABS Resin & Unbrushed Chrome Plating

AT3019 Cap for Nonilluminated

Cap Color Available:

- P** Brushed Chrome




Material for Lens: ABS Resin & Brushed Chrome Plating

AT3020 Cap with Illumination Ring for Bright or Super Bright LED

Cap Color Available:

- JS** Metallic Silver with Clear Ring




Materials
Lens: Polycarbonate
Insert: Polyester

*Yellow cap pairs with amber LED to achieve amber illumination.

AT3025 Cap for Illuminated or Nonilluminated

Lens/Diffuser Colors Available:

- JB** Clear/White
For Bright & Super Bright LEDs
- CB** Red/White
For Bright LED only
- EB** *Yellow/White
For Bright LED only
- FB** Green/White
For Bright LED only
- HB** Unbrushed Chrome/White
For Bright & Super Bright LEDs




Material for Lens & Diffuser: Polycarbonate

AT3027 Cap for Nonilluminated

Cap Color Available:

- P** Brushed Chrome



Material for Lens: ABS Resin & Brushed Chrome Plating

*Yellow cap pairs with amber LED to achieve amber illumination.

Standard Legends for Unbrushed Chrome Caps

001



Round or Square Cap
Bright or Super Bright LED

002



Round or Square Cap
Bright or Super Bright LED

003



Round or Square Cap
Bright or Super Bright LED

004



Round or Square Cap
Bright or Super Bright LED

005



Round or Square Cap
Bright or Super Bright LED

Images appear the color of the LED when lit.
Contact factory for other legends options.

Legend illustrations are approximate representations of the actual images on the caps.

Unbrushed Chrome/White Cap with Lens/Diffuser





Without Illumination



With Illumination


Depending on the design and the color of ink used, the legend may be visible when it is not illuminated.
It is recommended that the legend be clear and without ink in order to achieve the maximum visibility when the cap is illuminated.

TYPICAL SWITCH DIMENSIONS

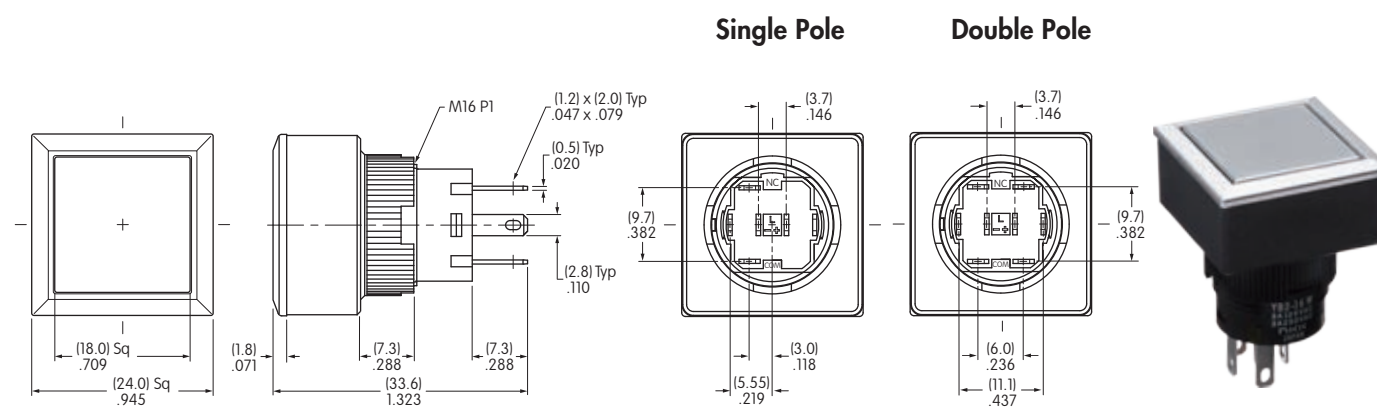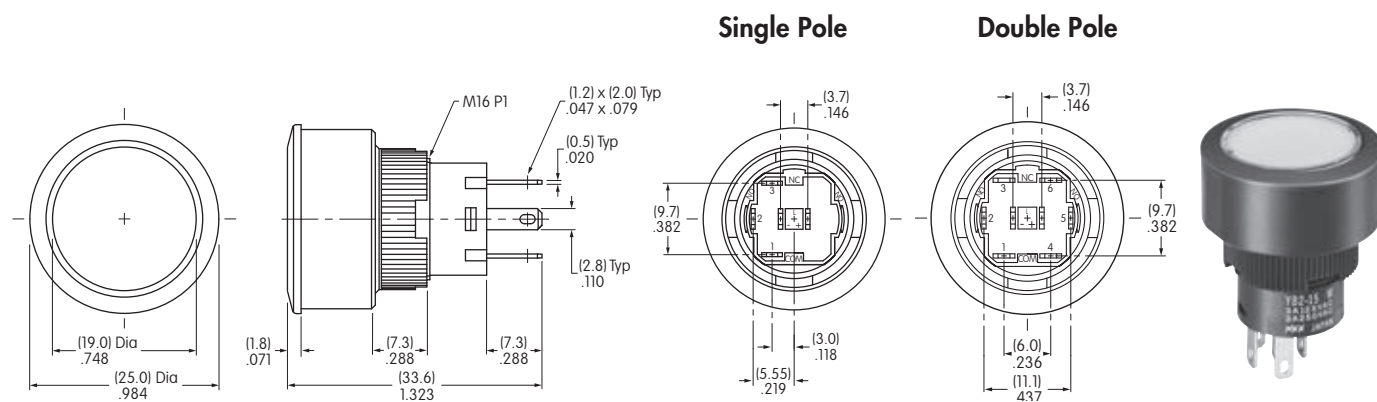


PANEL THICKNESS & CUTOUT

Recommended
Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)



Side-by-side Mounting

Recommended
Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)





Side-by-side Mounting



OPTIONAL ACCESSORIES

Adaptors




AT716
Single Pole
Solder Lug/
Quick Connect
Terminals






AT717
Double Pole
Solder Lug/
Quick Connect
Terminals



AT718
Single Pole
Straight PC
Terminals





AT719
Double Pole
Straight PC
Terminals



Material: Glass fiber reinforced polyamide Note: Order adaptors separately

Round & Square Switch Dimensions Shown with Adaptor AT716

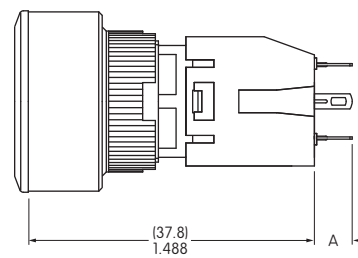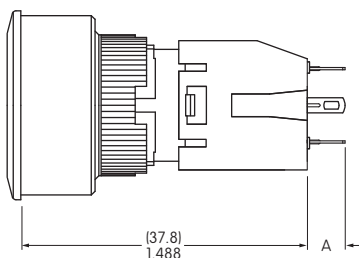

Dimension A:


Solder Lug .197" (5.0mm); Straight PC .157" (4.0mm)

Panel thickness for YB2 Round:
.020" ~ .161" (0.5mm ~ 4.1mm)


Panel thickness for YB2 Square:
.020" ~ .126" (0.5mm ~ 3.2mm)

ASSEMBLY INSTRUCTIONS FOR ROUND


1. Remove knurled mounting nut.




2. Remove bezel and red o-ring from housing. There are two o-rings in this assembly: one is red, one is orange.

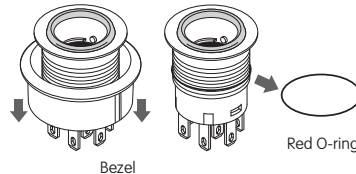

3. Install LED.




LEDs
AT634 & AT636



Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.




LED AT628




Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.




LEDs AT625G,
AT631B,
AT632F




The larger metal part within the LED represents the cathode (-). Align LED for appropriate polarity and insert LED into base.




4. Align tabs (B) on both sides of actuator with the projections (A) inside of the housing and push actuator firmly down to snap in.




5. Install the red o-ring which was removed in step 2 at the inside bottom of the bezel.



6. Align tab inside of the bezel with keyway on housing and bring bezel back into its original position.

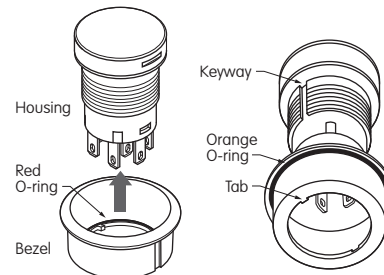


7. Before installing into panel, make sure that the orange o-ring is present at the back of the bezel. Align keyway on bezel with tab in panel and push switch all the way into the panel.



8. Attach mounting nut behind panel and tighten. Make sure that bezel and actuator fit properly and that there is no space between bezel and panel. Do not overtighten.

Mounting torque: 0.785Nm (6.95 lb•in) maximum.
Optional socket wrench AT106 available.

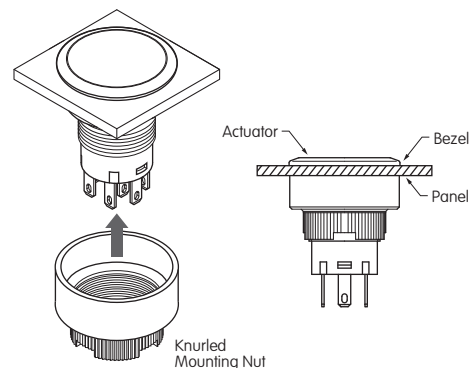


AT106 Socket Wrench




ASSEMBLY INSTRUCTIONS FOR SQUARE


1. Remove knurled mounting nut.

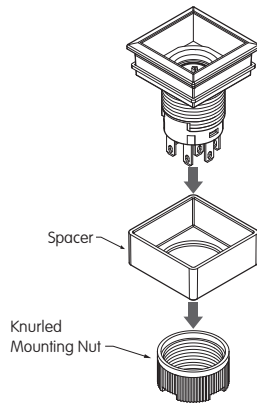


2. Remove bezel and blue o-ring from housing.

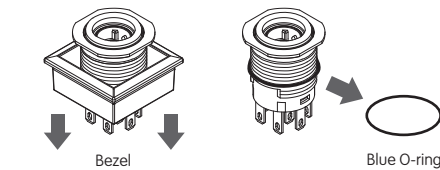

3. Install LED.




LEDs
AT634 & AT636



Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.




LED AT628




Align D-flat on LED with Part Number on switch for appropriate polarity and insert LED into base.




LEDs AT625G,
AT631B,
AT632F




The larger metal part within the LED represents the cathode (-). Align LED for appropriate polarity and insert LED into base.




4. Align tabs (B) on both sides of actuator with the projections (A) inside of the housing and push actuator firmly down to snap in.




5. Install the blue o-ring which was removed in step 2 at the inside bottom of the bezel.



6. Align tab inside of the bezel with keyway on housing and bring bezel back into its original position.

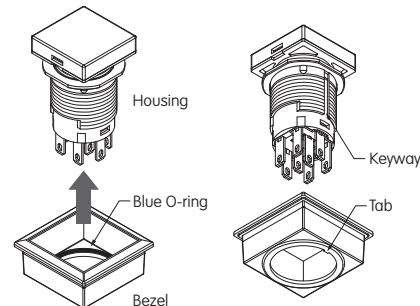


7. Before installing into panel, make sure that the square gasket is present at the back of the bezel. Align keyway on bezel with tab in panel and push switch all the way into the panel.



8. Attach mounting nut behind panel and tighten. Make sure that bezel and actuator fit properly and that there is no space between bezel and panel. Do not overtighten.

Mounting torque: 0.785Nm (6.95 lb•in) maximum.
Optional socket wrench AT106 available.

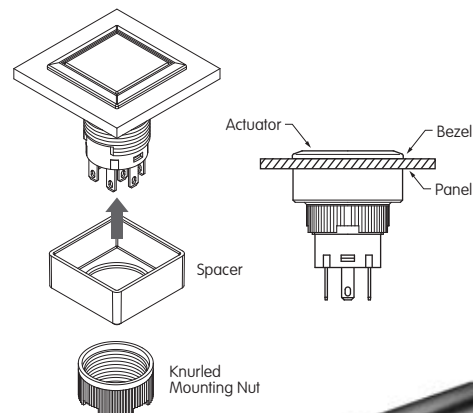

AT106 Socket Wrench




LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.


Suggested Printable Area for YB2 Caps

Recommended Methods: Laser Etch on clear cap, Screen Print or Pad Print on cap.
Epoxy based ink is recommended.


For Caps
AT3017, AT3018, and AT3019



For Cap
AT3020 (with clear ring for illumination)





For Caps
AT3025 and AT3027



Shaded areas are printable areas.

Suggested Printable Area for Film Inserts



Recommended Method:

Screen Print; Epoxy based ink is recommended

Film Material and Thickness:

Clear Polyester, 4 mil max.

Shaded areas are printable areas.

HANDLING & PRECAUTIONS



LEDs are electrostatic sensitive devices. When installing and handling LEDs, use an electrostatic protected work station to prevent LED damage.