

# Terms & Acronyms

Toggles

Rockers

Pushbuttons

Illuminated PB  
Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

## A


<b>AC</b>	Alternating Current; electric current that continually reverses direction at a fixed frequency
<b>alloy</b>	A metal created by combining two or more different metals to obtain a desired physical property
<b>alternate action</b>	Commonly describing pushbutton switches; remaining in a given circuit condition after removal of actuating force; when actuating force is applied a second time, the opposite circuit is engaged; also known as push-push switching action; may or may not be latchdown
<b>ambient temperature range</b>	Operating temperature range
<b>angle of throw</b>	Used with rockers and toggles to indicate total travel arc measured in degrees
<b>annealed</b>	Relieved of mechanical stress through the application of heat and gradual cooling; for example, annealed copper is less brittle
<b>ANSI</b>	American National Standards Institute; a standard-setting agency of the United States which approves the design and/or performance of electrical/electronic components that are distributed in the world market
<b>arcing</b>	The flow of electric current between opening or closing switch contacts
<b>AWG</b>	American Wire Gauge. Sizes may be determined by measuring the diameter of the conductor (the bare wire) with the insulation removed.

## B

<b>bifurcated contact</b>	A two-pronged, wiping movable contact
<b>bounce</b>	The repeated rebounding of the movable contact during the transfer from one throw to the next; measured in milliseconds
<b>brass</b>	An alloy of zinc and copper
<b>break before make</b>	Interrupting one circuit of a pole before completing another of the same pole (nonshorting contact)

## C

<b>capacitive load</b>	A load in which the initial current on make is higher than steady state; upon break it is less than steady state. Current leads voltage in capacitive loads
<b>clad</b>	The joining of two dissimilar materials by welding or bonding
<b>cleaning</b>	Automated cleaning for process sealed devices, manual cleaning for unsealed devices. Cleaning is needed to remove flux from terminals and PC boards
<b>contact resistance</b>	The resistance across a pair of closed contacts which is in series with the load; this resistance increases with the age of the switch at a rate varied by environment, frequency of use, voltage, and load conditions; measured in milliohms
<b>convection reflow</b>	Automated soldering of surface mount devices by running the PC board with the attached components through a soldering convection oven
<b>coplanarity</b>	The profile of the surface tolerance establishes a tolerance zone defined by two parallel planes some distance apart within which all considered surfaces must lie



HPO3 Series



All other SMTs

# Terms & Acronyms

<b>creepage</b>	The unwanted flow of electrical current from one conductive part to another	
<b>CSA</b>	Canadian Standards Association 	
<b>cULus</b>	Underwriters Laboratories Inc. - indicates compliance with both Canada and US requirements 	
<b>cycle</b>	The complete sequence of indexing through all successive switch positions and returning to the original position	
<b>D</b>		
<b>DC</b>	Direct Current; electric current that flows only in one direction	
<b>detent</b>	A mechanical positioning device for stopping actuator travel at each successive electrical circuit; for example, a spring-operated ball and groove	
<b>dielectric strength</b>	The ability of an insulating material to withstand high voltage without electrical degradation	
<b>differential travel</b>	The distance an actuator moves between the point where contacts snap over and where they snap back, or where a contact makes and then breaks	
<b>DIP</b>	Dual Inline Package, indicating .100" center-to-center terminal spacing and .300" row-to-row spacing	
<b>double break</b>	Having two pairs of contacts (shorting bar) that open the circuit at two places; having this added contact material improves heat dissipation and increases life; desirable in DC circuit applications	
<b>DP</b>	Double Pole; see pole	
<b>dry circuit</b>	A low energy circuit condition where no arcing occurs during contact switching; for example, 0.4VA maximum @ 28V AC/DC maximum; see logic level	
<b>DSP</b>	National Defense Standards of Japan; NKK file numbers C 6310B & C 6313	
<b>DT</b>	Double Throw; see throw	
<b>dust cover</b>	Protects switch in an environment where small particles and dust exist; switch is operable with dust cover in place	
<b>E</b>		
<b>environmentally sealed</b>	Protected for use in harsh environments	
<b>F</b>		
<b>flash plating</b>	A very thin or "instant plating" of usually less than 10 microinches in thickness	
<b>flow soldering</b>	Automated soldering of through-hole devices on PC boards, also known as wave soldering	
<b>flux</b>	Chemical used for cleaning metal surfaces so that solder will flow out on the metal; fluxes change a passive, contaminated metal surface into an active, clean, solderable surface	
<b>G</b>		
<b>gull wing</b>	A type of surface mount terminal which extends from side of switch and has an L-shaped bend at the end	

Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

**Z**  
Supplement

# Terms & Acronyms

Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

## H

**horsepower** Horsepower, a unit of work, is often found as a rating on electrical motors. One horsepower is equal to 746 watts.

## I

**inductive load** A load in which the initial current on make is lower than steady state and upon break is greater than steady state. The long arcing time, due to stored energy in the inductor at the time of breaking, is severe on the switch contacts

**IEC** International Electrotechnical Commission  
3 Rue de Varembe  
P. O. Box 131  
1211 Geneva 20, Switzerland



**IECQ** IEC's Quality Assessment System for Electronic Components, created in 1983 to facilitate national and international trade in certified electronic components; a worldwide certification system which provides a method whereby electronic components made and handled by approved manufacturers and distributors can be used anywhere without further testing.

**infrared reflow** A method of mass soldering surface mount devices with some form of infrared (IR) thermal radiation, such as a lamp IR system where PCB and components are heated largely by radiant energy from IR lamps

**inrush** The initial, transitory high-level of current through contacts upon making (closing); can cause severe degradation of contacts; applicable to resistive and capacitive loads

**insulation resistance** The electrical resistance between two normally insulated parts; measured at a specific high potential; usually greater than 1 megohm

**IP** Ingress Protection (IP) rating system for definition of level of water and dust protection

**ISO** ISO, International Standards Organization, is a network of the national standards institutes of 146 countries, on the basis of one member per country, with a Central Secretariat in Geneva, Switzerland, that coordinates the system

**isolated lamp circuit** Independent of switching circuit; lamp is operated on a circuit separate from the switch circuit

## J

**JEITA** Japan Electronics and Information Technology Industries Association

**JETL** Japan Electrical Testing Laboratory



**JIS** Japan Industrial Standard; Japan Industrial Standards Committee (JISC)  
Agency of Industrial Science and Technology



## L

**lamp load (tungsten)** Most notably characterized by the high inrush current at make (approximately 10 to 16 times the steady state)

**latchdown** One type of alternate action in which the pushbutton is mechanically fastened in the down position; the pushbutton is at "normal" position for one circuit and latched down position for the other circuit condition

**LED** Light Emitting Diode; provides illumination with advantages of long life and low power consumption

**logic level** An application in which power levels do not cause arcing, melting, or softening of contacts; also referred to as dry circuit or low energy; specified 0.4VA maximum @ 28V AC/DC maximum; typically requiring gold contacts for reliability

# Terms & Acronyms

**low level** Devices that are used in a low level circuit (low voltage and low current) have not been tested by UL and/or CSA. When used as intended in a low level circuit, the results do not produce hazardous energy.

**luminous intensity** The luminous intensity is the luminous flux emitted from a point per unit solid angle into a particular direction. Standard unit of luminous intensity is Candela (cd), also expressed as Lumen per Steradian (lm/sr).

## M

**maintained action** Remaining in a given circuit condition until actuated to the opposite circuit condition where it is again maintained; opposite momentary action

**make before break** Completing one circuit of a pole before interrupting another of the same pole (shorting contact)

**MITI** Ministry of Industry & Trade Institute (Japan)

**momentary action** Mechanically returning from a temporary circuit condition to the normal circuit condition as soon as the actuating force is removed

**motor load** Most electric motors are designed to run at 50% to 100% of rated load. Maximum efficiency is usually near 75% of rated load. Thus, a 10-horsepower (hp) motor has an acceptable load range of 5 to 10 hp; peak efficiency is at 7.5 hp. A motor's efficiency tends to decrease dramatically below about 50% load.

**MSCP** Mean Spherical Candle Power; a unit of measure of light intensity

## N

**NC** Normally Closed contacts; circuit is closed when actuator is in relaxed or normal position

**NEMA** National Electrical Manufacturers Association, an agency of the United States setting standards for products distributed worldwide; applied to switches in their degrees of protection against the intrusion of liquids, dust, and other contaminants

**Newton** The unit of measure for operating force abbreviated N; see the conversion tables in the previous section

**NO** Normally Open contacts; circuit is open when actuator is in relaxed or normal position; applies to momentary or alternate action switches

**nominal** The result of the calculated actual value range

**nonshorting contacts** Contacts which break before make

**nonswitching rating** The power carrying capability of a switch after contact closure and at the end of contact bounce; usually much higher than the switching rating

## O

**opaque** Condition that prevents the passage of light

**overtravel** The distance an actuator moves beyond the point at which electrical contacts transfer

## P

**panel seal** Liquid is prevented from reaching the switch contacts from the front of the panel if the panel is subjected to spills or splashing

**PCB** Printed Circuit Board; thin copper traces on a plastic laminate providing low cost, low current mass wiring

Toggle

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Z  
Supplement

# Terms & Acronyms

Toggle

Rockers

Pushbuttons

Illuminated PB

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators


Accessories

Supplement

**PF** Power Factor; a means of determining contact capability when used with inductive loads relative to the standard resistive load rating; for example, if PF = 1.0 the inductive load is 100% of the resistive load, or if PF = 0.6 the inductive load is 60% of the resistive load

**photo interrupter** Light source being interrupted and thus changing the status of an electrical circuit

**pole** A single common electrical input having one or more outputs

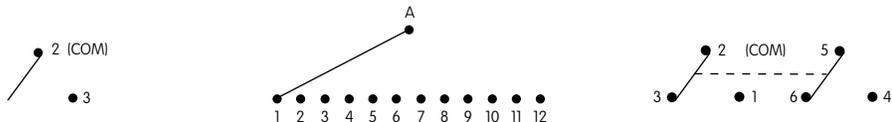

**Single Pole** (with 1 output)

**Single Pole** (with 12 outputs)

**Double Pole** (with 2 outputs)

**position** The mechanical detents of a switch actuator

**PPS** Polyphenylene sulfide; a thermoplastic resin which is chemical and flame resistant

**pretravel** The distance an actuator moves before a change in the electrical condition is made

**process compatible** Capable of subjection to automated cleaning procedures after wave soldering; often noted as “washable”

**process sealed** Sealed to withstand the entire automated processing including the final cleaning

**protective guard** Prevents accidental actuation; switch is not operable when protective guard is in place

**push-push** Also known as alternate action; is not latchdown

## R

**RCJ** Reliability Center for Electronic Components of Japan, member of EXACT (International Exchange of Authenticated Electronic Component Performance Test Data)



**resistive load** The easiest load to switch because current and voltage are in a steady state on make and drop instantly to zero on break; produces minimal arcing which maximizes contact life

**RMS** Root Mean Square

**RoHS** Restriction of Hazardous Substances in Electrical and Electronic Equipment directive restricting the use of lead, cadmium, mercury, hexavalent chromium and PBB/PBDE flame retardant materials in electrical and electronic products sold in Europe beginning July 1, 2006

## S

**SEMKO** Svenska Elektriska Materielkontrollanstalten of Sweden



**SEV** Schweizerischer Elektrotechnischer Verein of Switzerland




**shorting contacts** Contacts which make before break

**silicone rubber** Rubber made from silicone elastomers and noted for its retention of flexibility, resilience, and tensile strength over a wide temperature range

**SIP** Single Inline Package, indicating .100” center-to-center terminal spacing with terminals aligned in one row


**snap action** The abrupt transfer of contacts from one position to another; this action is relatively independent of the speed of actuator travel

**splashproof** Prevents entry of liquids at front panel generally by means of one or two internal o-rings, as illustrated here



**SPST** Single Pole Single Throw; see pole, also throw

**STC** Sliding Twin Contact, a mechanism with two movable contact surfaces which pinch the stationary contacts. The STC contact mechanism provides smooth, positive detent actuation, unparalleled logic-level reliability, and more contact stability than conventional mechanisms. Continued reliability is assured since the gold-plated contacts are wiped clean with each actuation. Furthermore, if one side of the twin contacts should fail to conduct, the other side functions as a backup or a fail-safe path for the current. The combination of rounded movable and stationary contacts provides the smooth contact feel not found previously in sliding contact type mechanisms.

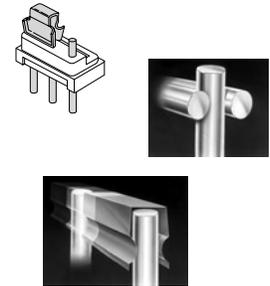

**surface mount SMD or SMT** Component terminals are soldered to pads on the surface of the PC boards as opposed to using holes for mounting; terminal shapes vary – gull wing, J-bend, and others

**synchronous lamp circuit** Lamp is operated on a circuit in phase with the switch; the switch contains a separate circuit to open or close the lamp circuit simultaneously with the switching circuit

## T

**tactile feedback** The switching action felt by an operator

**tamperproof** Designed to prevent tampering or provide evidence of tampering; impervious to tampering


**tamper resistant** Designed to make tampering difficult or resistive

**thermal shock** The state of a component that is undergoing an excessive temperature change, particularly in reference to movement from one process to another in soldering and cleaning


**thermoplastic** A plastic which is flexible and easily molded when heated and which becomes hard and rigid when cooled

**thermoset** A plastic which becomes hard and rigid when heated or cured


**throw** The number of electrical circuits within a pole



**Single Throw** (with 2 poles)



**Double Throw** (with 1 pole)

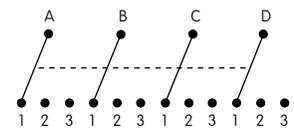


**Three Throw** (with 4 poles)

**total travel** Sum of pretravel and overtravel; full distance an actuator moves from relaxed position past the point of electrical contact and to the end of travel

**translucent** Transmitting and diffusing light so that objects beyond cannot be seen clearly

**transparent** Transmitting light without appreciably scattering so that objects lying beyond are entirely visible

**travel** The distance the actuator moves to effect the change of electrical circuits; see also differential travel, pretravel, overtravel, and total travel

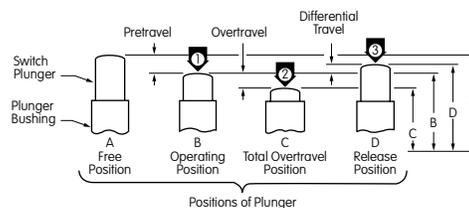

# Terms & Acronyms

Toggles

**two circuit** Circuit in which one circuit is completed in one position and another separate circuit is completed in the other position

Rockers

## U

**UL** Underwriters Laboratories Inc.; many of NKK's switches are UL Recognized 

**undercoating** A coating used for preparation of a surface for plating or used to prevent corrosion when the finish plating develops pinholes; thickness of an undercoating is determined by its purpose

Pushbuttons

Illuminated PB

## V

**vapor phase** A process well-suited to soldering surface mount devices; it combines infrared preheating with condensation heating for reflow, advantageous for eliminating overheating of components and PCB

Programmable

**VDE** Verband Deutscher Elektrotechniker of Germany



Keylocks

## W

**watertight** Impermeable to water except when subjected to immersion; not waterproof

**wavelength** The color of visible light is measured by its wavelength. The Greek symbol "lambda" is used to represent wavelength, the unit of measure is nm.

Rotaries

**wave soldering** A method of soldering in which a wave of molten solder contacts surfaces as the PC board with components is conveyed through the process; wave width, travel speed, dwell time, etc. are varied to achieve desired results

Slides

**WEEE** Waste Electrical and Electronic Equipment  
Directive aims at prevention of WEEE and its reuse, recycling and recovery, so as to reduce the disposal of this type of waste. The directive sets targets for the separate collection of WEEE, along with standards for treatment and targets for recycling and recovery.

Tactiles

**wiping action** Sliding of contacts over one another resulting in cleaning of the surfaces

Tilt

Touch

Indicators

## FEDERAL SUPPLY CODE

Accessories

NKK Switches has been assigned the  
FSC Number 63426  
and is classified as a  
Commercial and Governmental Entity (CAGE)  
by the Defense Logistics Agency  
in Battle Creek, Michigan.

Supplement  
Z